



Electrical features

Relay adj range A 45-65

IEC technical characteristics ($\leq 440V$)

I _e	A	65
kW	kW	30

Components

Starter enclosure standard supplied M3PA

Contactor standard supplied BF6500A

Thermal relay standard supplied RF826500

UL technical data

Maximum UL/CSA horsepower ratings three-phase, 3-pole

200V-208V	HP	20
220V-240V	HP	25
440V-480V	HP	50
550V-600V	HP	60

Mechanical features

Weight g 3760

Ambient conditions

Operating temperature

min	°C	-25
max	°C	+60


Storage temperature

min	°C	-40
max	°C	+70


Resistance & Protection

Frontal IP degree IP65

Dimensions

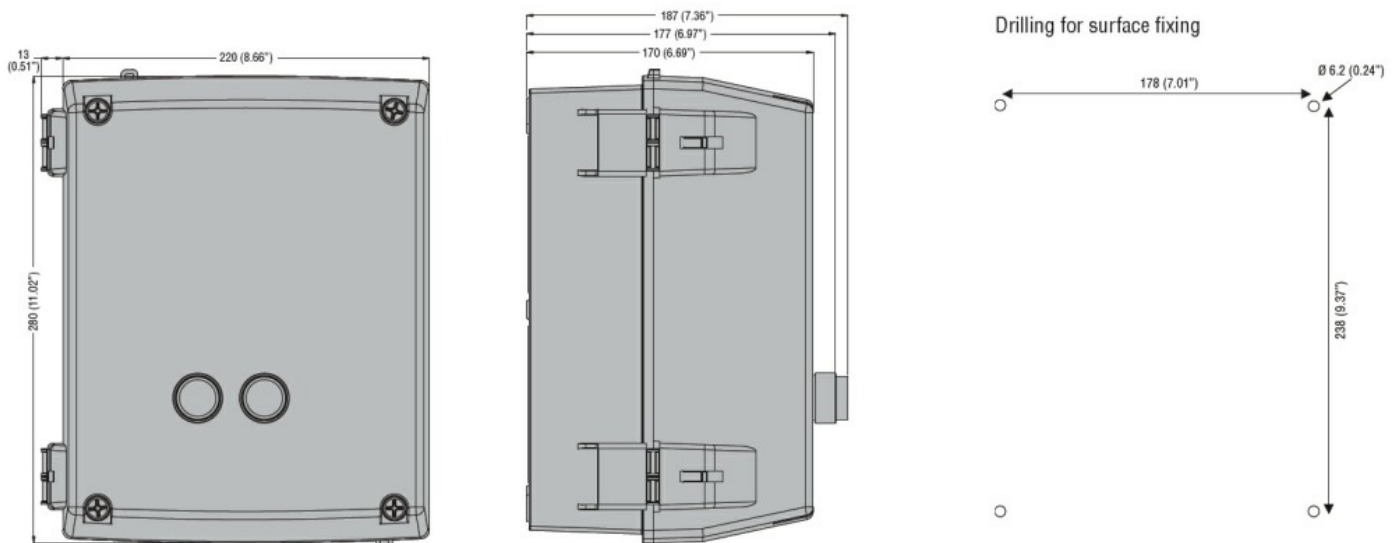

Wiring diagrams

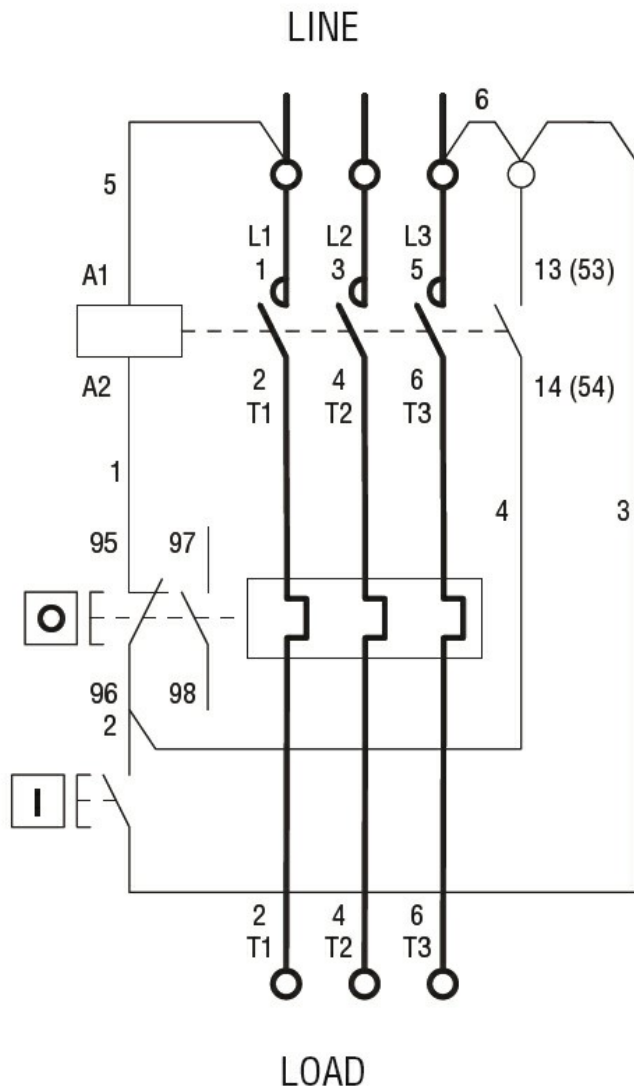

I = Start; O = Stop/Reset

Certifications and compliance

Certificates

EAC

ETIM classification

ETIM 8.0

EC001037 -
Motor
starter/Motor
starter
combination