



**Electrical features**

Maximum operating current ( $\leq 440V$ ) A 80

**Components**

Contactor standard supplied BF40A, BF50A,  
BF65A, BF80A,  
BF94A

Thermal relay to purchase separately RF82

**Mechanical features**

Weight g 1900

**Ambient conditions**

Operating temperature

	min	°C	-25
	max	°C	+60


Storage temperature

	min	°C	-40
	max	°C	+70


**Resistance & Protection**

Frontal IP degree IP65

**Dimensions**

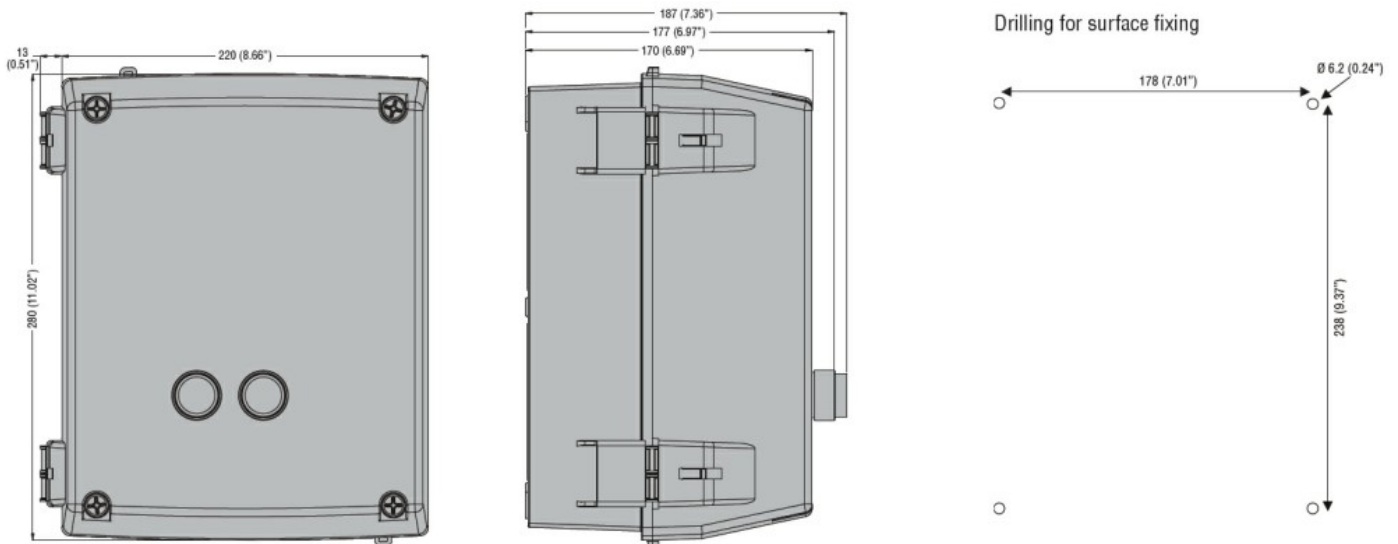

**Wiring diagrams**

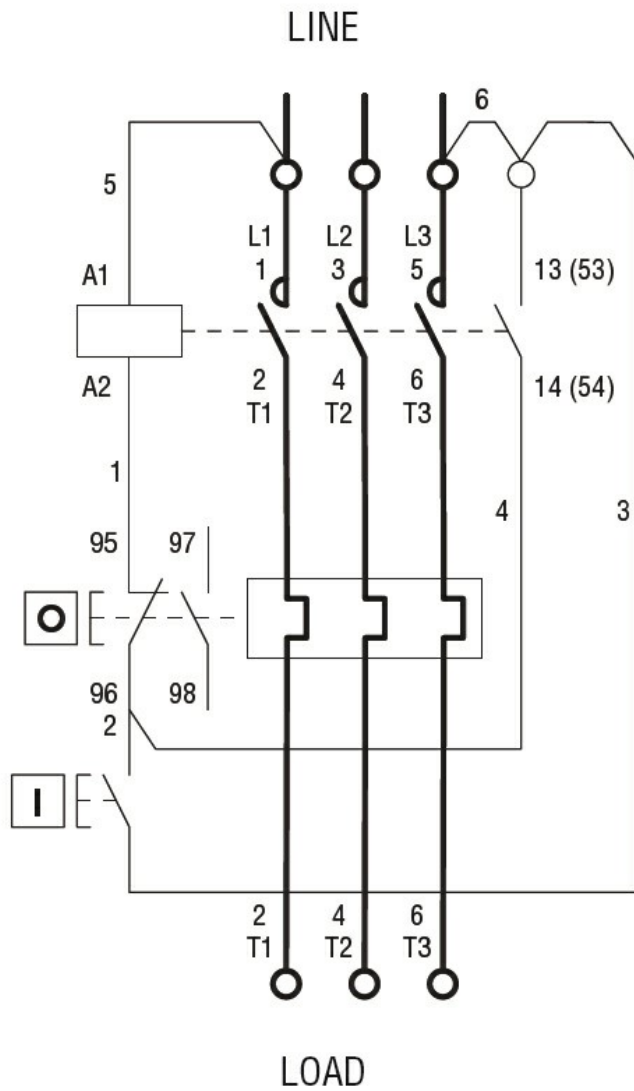

I = Start; O = Stop/Reset

**Certifications and compliance**

Compliance

CSA C22.2 n° 14  
IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508

Certificates

cULus

**ETIM classification**

ETIM 8.0

EC000200 -  
Enclosure for  
control circuit  
devices