



Electrical features

Relay adj range	A	46-65
IEC technical characteristics ($\leq 440V$)		
	le	A 65
	kW	kW 30

Components

Starter enclosure standard supplied	M3RA
Contactor standard supplied	BF6500A
Thermal relay standard supplied	RF826500

Mechanical features

Weight	g	3410
--------	---	------


Ambient conditions

Operating temperature			
	min	°C	-25
	max	°C	+60
Storage temperature			
	min	°C	-40
	max	°C	+70

Resistance & Protection

Frontal IP degree	IP65
-------------------	------

Dimensions

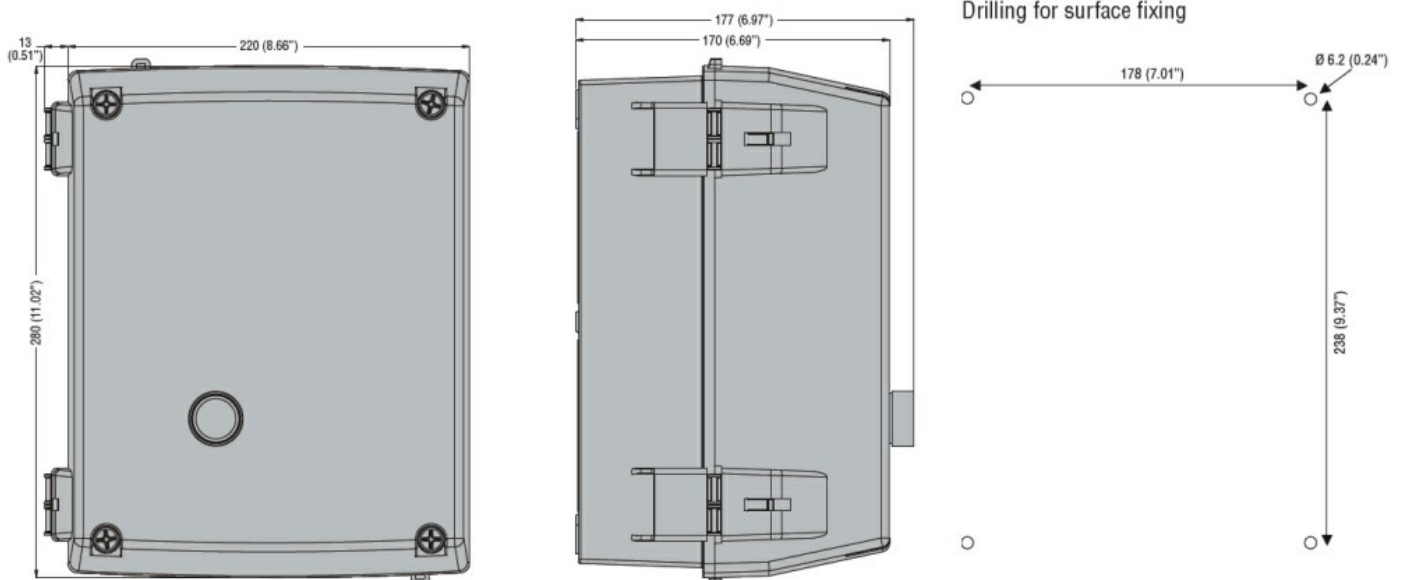

Wiring diagrams

