



Electrical features

Rated insulation voltage U_i IEC/EN	V	440
Rated impulse withstand voltage U_{imp}	kV	4
Rated operational voltage AC (IEC)	VAC	230
Rated frequency	Hz	50/60
Rated current (I_n)	A	32
Tripping curve		C
Short circuit rating (IEC)	kA	6
Limiting class		3
Electrical life	cycles	10000
Power dissipation per pole max	W	2.46


Ambient conditions

Operating temperature	min	°C	-40
	max	°C	+70
Storage temperature	min	°C	-40
	max	°C	+80
Max altitude		m	2000

Mechanical features

Operating position		normal		Vertical plan
Fixing		35mm DIN rail		
Tightening torque for terminals		min	Nm	1.1
		max	Nm	1.2
		min	lbin	9.7
		max	lbin	10.6
Terminals tool		Pz 2		
Conductor section		IEC		
		min	mm ²	1
		max	mm ²	16
		AWG/Kcmil		
		min		14
		max	kcmil	6
Mechanical life			cycles	20000
Weight			g	115
Frontal IP degree				IP20
Pollution degree				2
Grid distance as per Annex H.1 of IEC/EN60898-1 standard			mm	60

Dimensions

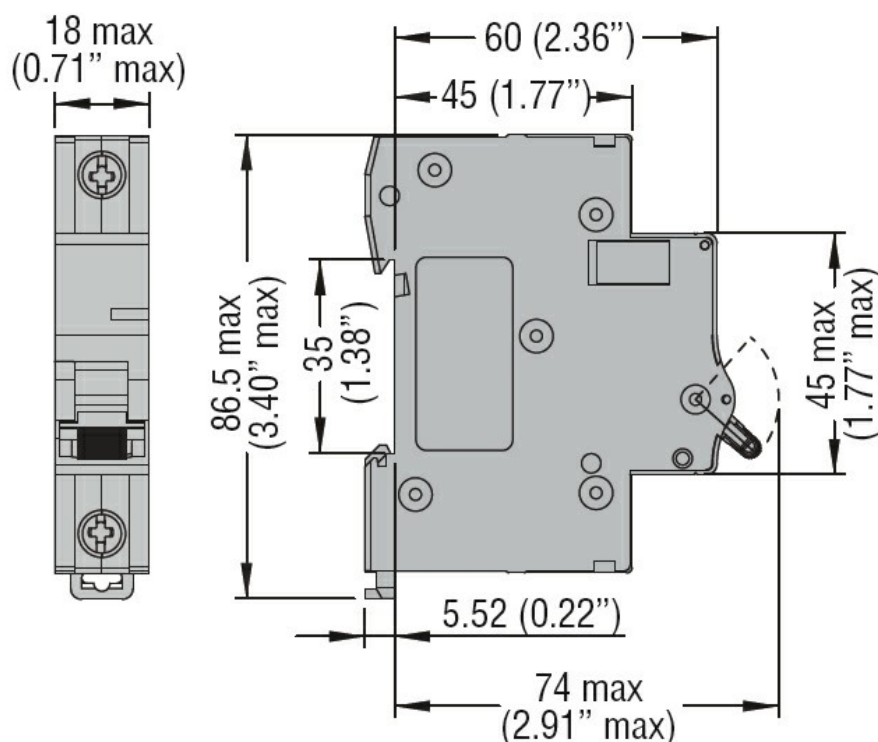

Wiring diagrams

Certifications and compliance

Compliance

IEC/EN 60898-1

IEC/EN 60947-2

Certifications

EAC

TÜV-Rheinland

ETIM classification

ETIM 8.0

EC000042 -
Miniature circuit
breaker (MCB)