



Product designation

Shunt trip release

Product type designation

P1X16230

Electrical features

Rated insulation voltage U_i IEC/EN	V	500
Rated impulse withstand voltage U_{imp}	kV	2500
Rated operational voltage AC (IEC)	VAC	110...415
Rated frequency	Hz	50/60

Ambient conditions

Operating temperature	min	°C	-40
	max	°C	+70
Max altitude	m		2000

Mechanical features

Tightening torque for terminals	max	Nm	1
	max	lbin	0.74

Conductor section

IEC

max mm² 2.5


Weight

g 70


Frontal IP degree

20

Dimensions

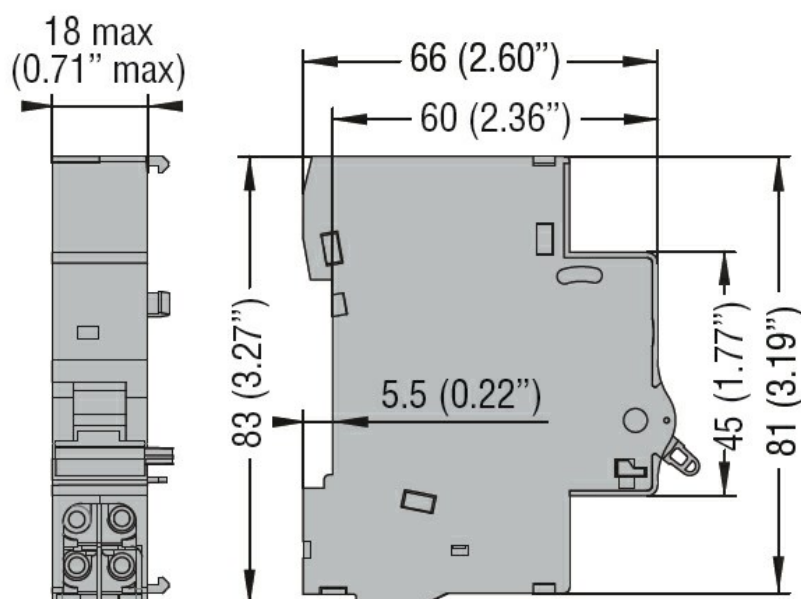

Wiring diagrams



Certifications and compliance

Compliance

IEC/EN 60947-5-1. UR "UL Recognized" per Canada e USA.

Certifications	
----------------	--

cULus

EAC

ETIM classification

ETIM 8.0 Shunt release
“Shunt release”

EC001023 -
Shunt release
(for power circuit
breaker)