




General characteristics


Description	Minimum and maximum AC voltage, phase loss, incorrect phase sequence and asymmetry relay		
Type of system	Three-phase without neutral		
Power supply			
Auxiliary supply voltage U_s	Self powered		
Operating voltage range	0.7...1.2 U_e		
Rated frequency	Hz	50/60 $\pm 5\%$	
Power consumption Max	VA	11	
Power dissipation Max	W	2.5	
Control circuit			
Rated voltage to control (U_e)	min	VAC	208
	Max	VAC	240
Voltage set-point ($\%U_e$)	min	%	80...95
	Max	%	105...115
Asymmetry set-point ($\%U_e$)		%	5...15
Tripping delay		s	0.1...20
Resetting time		s	0.5
Resetting hysteresis		%	3
Instantaneous tripping for U_e			Voltage $< 70\% U_e$
Type of reset			Automatic
Repeat accuracy		%	± 0.1
Tripping time for phase loss		ms	60
Relay outputs			
Number of relays		Nr.	1
Relay state			Normally energised De-energises at tripping
Contact arrangement			1 changeover SPDT
Rated operational voltage AC (IEC)		VAC	250
Maximum switching voltage		VAC	400
IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$		A	8
UL/CSA and IEC/EN 60947-5-1 designation			B300
Electrical life (with rated load)		cycles	100000
Mechanical life		cycles	3000000

Functions

Modular version				2U
Minimum AC voltage				Yes
Maximum AC voltage				Yes
Phase loss				Yes
Incorrect phase sequence				Yes
Asymmetry				No
Indications				
Indication				1 green LED for power on and tripping and 3 red LEDs for tripping
Connections				
Terminals type				Screw
Tightening torque for terminals		max	Nm	0.8
		max	lbin	7
Conductor cross section				
	AWG/Kcmil			
		min	AWG	24
		Max	AWG	12
	IEC			
		min	mm ²	0.2
		Max	mm ²	4
Insulations				
Rated insulation voltage Ui			V	600
Rated impulse withstand voltage Uimp			kV	6
Operating frequency withstand voltage			kV	4
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-20
		max	°C	+60
	Storage temperature			
		min	°C	-30
		max	°C	+80
Housing				
Execution (n° of modules)				2
Material				Self-extinguishing polyamide
Mounting				35mm DIN rail (IEC/EN 60715)
IEC degree of protection				IP40 on front; IP20 at terminals
Dimensions (W x H x D)			mm	35.8 x 104.7 x 64.9
Weight			g	130
Dimensions				

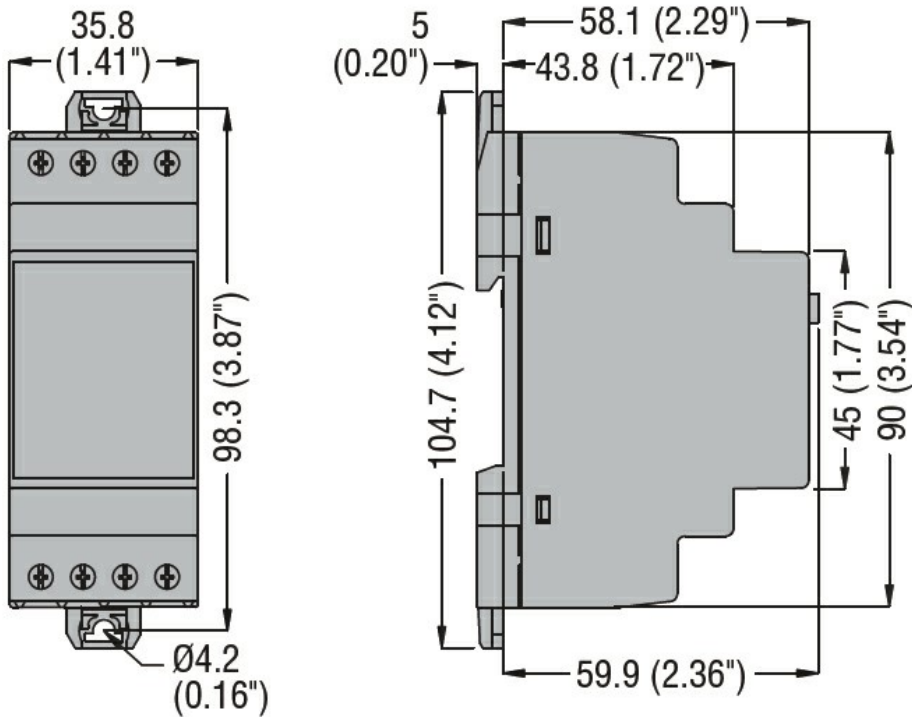

Wiring diagrams

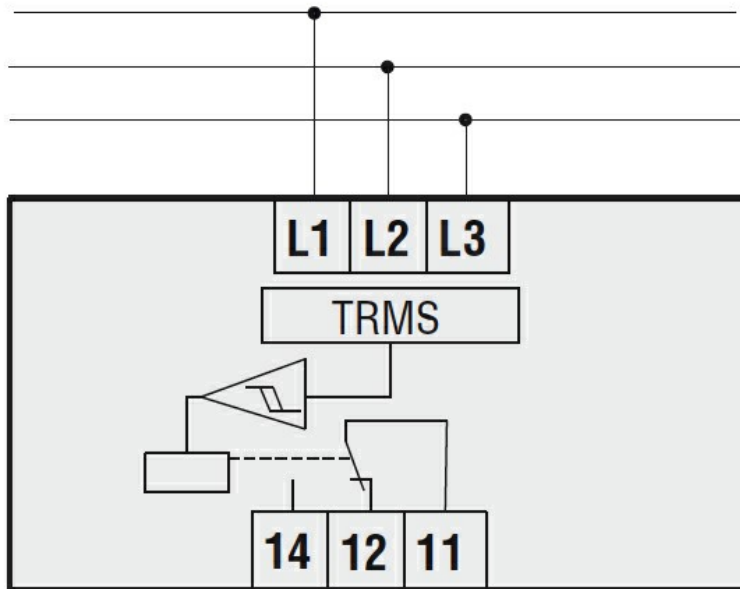

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60255-5

IEC/EN 60335-2-89

IEC/EN 61000-6-2

IEC/EN 61000-6-3

UL 508

Certificates

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus

EAC

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC001438 -
Voltage
monitoring relay