



Product designation	Switching power supplies		
Product type designation	PSL1		
<b>Input characteristics</b>			
Input type	Single-phase		
Rated supply voltage AC	VAC	Multivoltage 100...240	
Operating range	AC	min VAC	85
		Max VAC	264
	DC	min VDC	90
		Max VDC	375
Rated frequency		Hz	50/60
Operational frequency		min Hz	47
		max Hz	63
Current consumption Max		mA	1500
Insulation voltage Input/Output	AC	VAC	3000
	DC	VAC	4242
Internal fuse (250VAC)	T2A 250VAC		
<b>Output characteristics</b>			
Rated output voltage DC	VDC	24	
Voltage trimming (potentiometer) DC	min VDC	24	
	Max VDC	28	
Rated output current	A	2.5	
Rated output power	W	60	
Temperature coefficient	%/°C	±0.03	
Line adjustment	%	±0.5	
Load adjustment	%	±0.5	
Efficiency	%	89	
Overload protection	110...150%		
Short-circuit protection	Fold forward		
Ripple & noise	mV	50	
Parallel connection	Nr.	No	
<b>Indications</b>			
LED indicator for power on	Yes		
LED indicator for low voltage	No		
Power Rdy (Ready - minimum limit)	Yes		
<b>Connections</b>			
Terminals type	Screw		
<b>Ambient conditions</b>			

Temperature

Operating temperature

min	°C	-40
max	°C	+71

Storage temperature

min	°C	-40
max	°C	+85

Derating

%/°C	2.5%/°C above 60°C
------	--------------------

**Housing**

Material

Plastic

IEC degree of protection

IP20

Dimensions (W x H x D)

mm 40.5 x 90 x 115

Weight


g 400

**Installations**

Mounting


On 35mm DIN rail

**Dimensions**

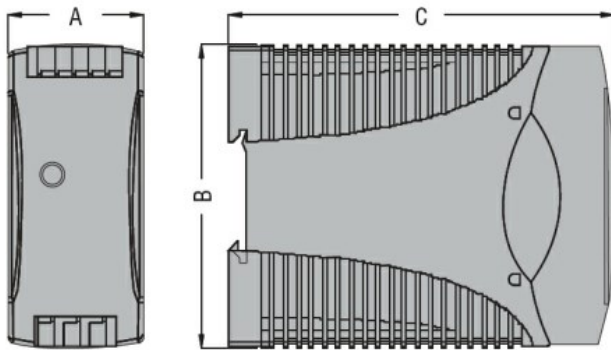

TYPE	A	B	C
PSL1 005 24	22.5 (0.88")	90 (3.54")	115 (4.53")
PSL1 010 24	22.5 (0.88")	90 (3.54")	115 (4.53")
PSL1 018 24	22.5 (0.88")	90 (3.54")	115 (4.53")
PSL1 030...	40.5 (1.59")	90 (3.54")	115 (4.53")
PSL1 060...	40.5 (1.59")	90 (3.54")	115 (4.53")
PSL1 100...	54 (2.12")	90 (3.54")	115 (4.53")
PSL2 100...	54 (2.12")	90 (3.54")	115 (4.53")
PSLR 20 24	54 (2.12")	90 (3.54")	115 (4.53")

**Wiring diagrams**

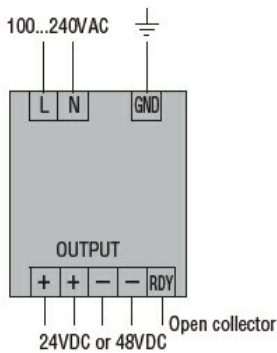

**Certifications and compliance**

Compliance

CSA C22.2 n°14

IEC/EN/BS 61000-6-2

IEC/EN/BS 61000-6-3

IEC/EN/BS 62368-1

UL 508

Certificates

cULus

EAC

RCM

ETIM classification

ETIM 8.0

EC002540 - DC-  
power supply