



### Input characteristics

Input type	Single-phase		
Rated supply voltage AC	VAC	Self-configurable 115...230	
Operating range	V	90...132VAC - 180...264VAC / 210...375VDC	
Rated frequency	Hz	50/60	
Operational frequency	min	Hz	47
	max	Hz	63
Current consumption Max	mA	2.8A (90VAC) / 1.4A (180VAC)	
PFC	0.7		
Insulation voltage Input/Output	AC	VAC	3000
	DC	VAC	4242
Internal fuse (250VAC)	T3 15A 250VAC		

### Output characteristics

Rated output voltage DC	VDC	24	
Voltage trimming (potentiometer) DC	min	VDC	22.5
	Max	VDC	28.5
Rated output current	A	5	
Rated output power	W	120	
Temperature coefficient	%/°C	±0.03	
Line adjustment	%	±0.5	
Load adjustment	%	±1	
Efficiency	%	86	
Overload protection	110...145%		
Short-circuit protection	Fold forward		
Ripple & noise	mV	50	
Parallel connection	Nr.	3	

### Indications

LED indicator for power on	Yes
LED indicator for low voltage	Yes
Power Rdy (Ready - minimum limit)	Yes

### Connections

Terminals type	Screw
----------------	-------

### Ambient conditions

Temperature	Operating temperature	min	°C	-35
		max	°C	+71
Storage temperature				

	min	°C	-40
	max	°C	+85
Derating		%/°C	2.5%/°C above 60°C


**Housing**

Material	Metal
IEC degree of protection	IP20
Dimensions (W x H x D)	mm 64 x 124.5 x 123.6
Weight	g 1018

**Installations**


Mounting	On 35mm DIN rail
----------	------------------

**Dimensions**

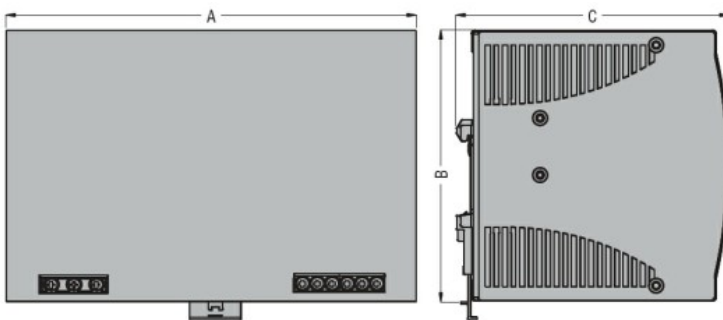

TYPE	A	B	C
PSL1 120...	64 (2.52")	124.5 (4.90")	123.6 (4.87")
PSL1 240...	83.5 (3.29")	124.5 (4.90")	123.6 (4.87")
PSL1 300...	83.5 (3.29")	124.5 (4.90")	123.6 (4.87")
PSL1 480...	175.5 (6.91")	124.5 (4.90")	123.6 (4.87")
PSL3 120 24	74.3 (2.92")	124 (4.88")	118.8 (4.68")
PSL3 240...	89 (3.50")	124 (4.88")	118.8 (4.68")
PSL3 480...	150 (5.90")	124 (4.88")	118.8 (4.68")
PSL3 960...	275.8 (10.86")	125.9 (4.96")	120.3 (4.74")

**Wiring diagrams**

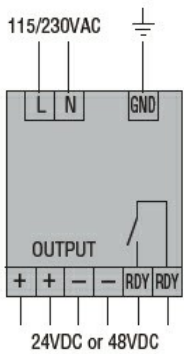

**Certifications and compliance**

**Compliance**

- CSA C22.2 n°14
- IEC/EN/BS 61000-6-2
- IEC/EN/BS 61000-6-3
- IEC/EN/BS 62368-1
- UL 508

**Certificates**

- cULus
- EAC
- RCM

**ETIM classification**

ETIM 8.0

EC002540 - DC-power supply