



### Input characteristics

Input type				Three-phase
Rated supply voltage AC		VAC		Multivoltage 400...500
Operating range	AC			
		min	VAC	340
		Max	VAC	575
	DC			
		min	VDC	480
		Max	VDC	820
Rated frequency			Hz	50/60
Operational frequency		min	Hz	47
		max	Hz	63
Current consumption Max			mA	500
PFC				0.55
Insulation voltage Input/Output		AC	VAC	3000
		DC	VAC	4242
Internal fuse (250VAC)				T2A 600VAC

### Output characteristics

Rated output voltage DC		VDC		24
Voltage trimming (potentiometer) DC		min	VDC	22.5
		Max	VDC	28.5
Rated output current			A	5
Rated output power			W	120
Temperature coefficient			%/°C	±0.03
Line adjustment			%	±1
Load adjustment			%	±1
Efficiency			%	89
Overload protection				115...135%
Short-circuit protection				Hiccup
Ripple & noise			mV	100
Parallel connection			Nr.	No

### Indications

LED indicator for power on	Yes
LED indicator for low voltage	Yes
Power Rdy (Ready - minimum limit)	Yes

### Connections

Terminals type	Screw
----------------	-------

### Ambient conditions

Temperature	Operating temperature
-------------	-----------------------


Storage temperature	min	°C	-40
	max	°C	+71

Derating	min	°C	-40
	max	°C	+85
		%/°C	2.5%/°C above 60°C

<b>Housing</b>			
Material			Metal
IEC degree of protection			IP20
Dimensions (W x H x D)		mm	74.3 x 124 x 118.8
Weight		g	910


<b>Installations</b>			
Mounting			On 35mm DIN rail

**Dimensions**

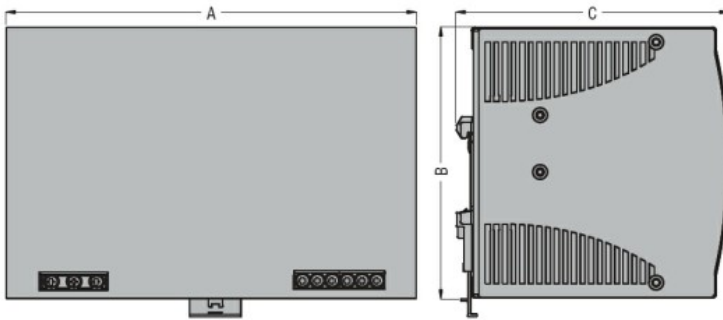

TYPE	A	B	C
PSL1 120...	64 (2.52")	124.5 (4.90")	123.6 (4.87")
PSL1 240...	83.5 (3.29")	124.5 (4.90")	123.6 (4.87")
PSL1 300...	83.5 (3.29")	124.5 (4.90")	123.6 (4.87")
PSL1 480...	175.5 (6.91")	124.5 (4.90")	123.6 (4.87")
PSL3 120 24	74.3 (2.92")	124 (4.88")	118.8 (4.68")
PSL3 240...	89 (3.50")	124 (4.88")	118.8 (4.68")
PSL3 480...	150 (5.90")	124 (4.88")	118.8 (4.68")
PSL3 960...	275.8 (10.86")	125.9 (4.96")	120.3 (4.74")

**Wiring diagrams**

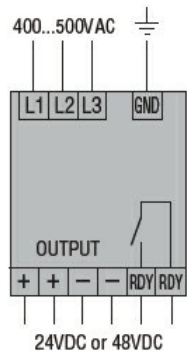

**Certifications and compliance**

Compliance	CSA C22.2 n°14
	IEC/EN/BS 61000-6-2
	IEC/EN/BS 61000-6-3
	IEC/EN/BS 62368-1
	UL 508

Certificates	cULus
	EAC
	RCM

**ETIM classification**

ETIM 8.0	EC002540 - DC-power supply
----------	----------------------------