



General characteristics			
Number of poles	Nr.		3
Overvoltage category			III
Pollution degree			3
Frontal IP degree			IP20
Type of release			Thermal
Protection fuse	aM (IEC)	A	0.5
	RK5 (UL)	A	1
Phase failure detection			no
Reset mode			Manual or automatic
Power circuit characteristics			
Rated insulation voltage U_i IEC/EN	V		690
Rated impulse withstand voltage U_{imp}	kV		6
Rated operational voltage	V		690
Operational frequency	min	Hz	0
	max	Hz	400
Operational current I_e	Operational current min	A	0.16
	Operational current max	A	0.25
Tripping class			10A
Test Button			Yes
Trip indicator			yes
Terminals	type		screw and washer
	screw		M4
	width	mm	12.6
	tool		Phillips 2
Tightening torque for terminals	min	Nm	2
	max	Nm	2.5
	min	lbin	1.5
	max	lbin	1.8
Conductor section	AWG/kcmil max		8
Auxiliary circuit characteristics			
Auxiliary contacts	NO	Nr.	1
	NC	Nr.	1
Auxiliary Rated insulation voltage U_i IEC/EN	V		690
Auxiliary Rated impulse withstand voltage U_{imp}	kV		6
Auxiliary Rated operational voltage	V		690

Operating current AC15

24V	A	3
120V	A	3
240V	A	1.5
380V	A	0.95
480V	A	0.75
500V	A	0.72
600V	A	0.6

Operating current DC13

125V	A	0.11
600V	A	0.22

IEC Conventional free air thermal current I_{th} ≤ 40°C

A	10
---	----

Terminals

Auxiliary circuit type		screw and washer
Auxiliary circuit screw		M3,5
Auxiliary circuit width	mm	8
Auxiliary circuit tool		Phillips 2

Conductor section

Auxiliary circuit Flexible w/o lug max	mm ²	2.5
Auxiliary circuit Flexible c/w lug max	mm ²	2.5

Tightening torque for terminals

Auxiliary circuit min	Nm	0.8
Auxiliary circuit max	Nm	1
Auxiliary circuit min	lbin	0.59
Auxiliary circuit max	lbin	0.74

UL/CSA and IEC/EN 60947-5-1 designation

B600-R300

Ambient conditions

Operating temperature

min	°C	-25
max	°C	60

Storage temperature

min	°C	-50
max	°C	70

Compensation temperature

min	°C	-20
max	°C	60

Max altitude

m 3000

Mechanical features

Operating position

normal allowable	Vertical plan ±30°
	Direct mounting on BF09... BF38...

Fixing

Weight

g 160

UL technical data


Full-load current (FLA) for three-phase AC motor

at 480V	A	0.25
at 600V	A	0.25


Dimensions

MOTOR PROTECTION RELAY, NON PHASE FAILURE/NON SINGLE-PHASE SENSITIVE.
THREE-POLE (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING
ON BF09 - BF38 CONTACTORS, 0.16...0.25A


BF00 A... BF09 A... - BF12 A... - BF18 A... - BF25 A... three poles with
RF...38 thermal overload relay

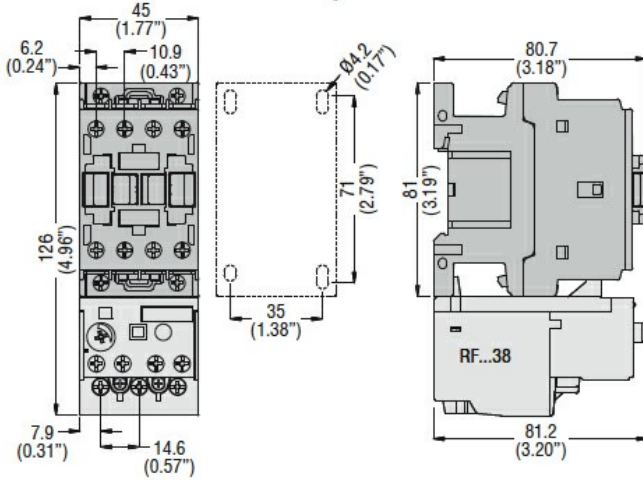

BF26 00A... - BF32 00A... - BF38 00A... three poles with **RF...38** thermal overload relay

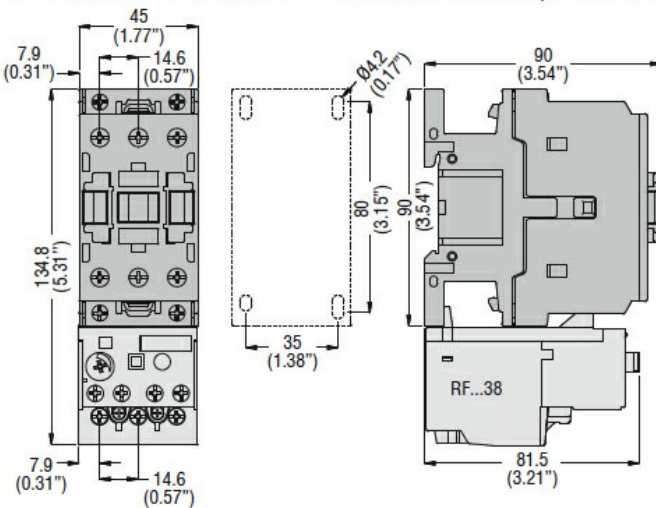

Wiring diagrams

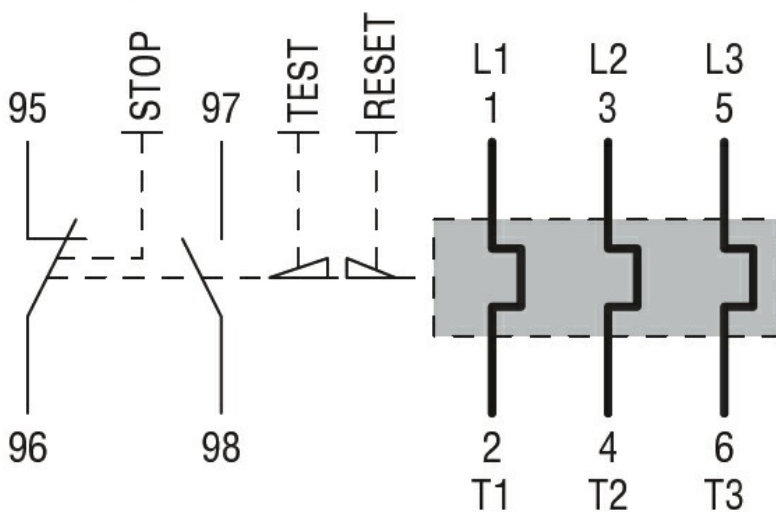

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-1

MOTOR PROTECTION RELAY, NON PHASE FAILURE/NON SINGLE-PHASE SENSITIVE.
THREE-POLE (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING
ON BF09 - BF38 CONTACTORS, 0.16...0.25A

UL508

Certifications

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000106 -
Thermal overload
relay