



General characteristics

Reset mode


Manual

Mechanical features


Fixing

Direct mounting
on BF40...
BF94...

Dimensions

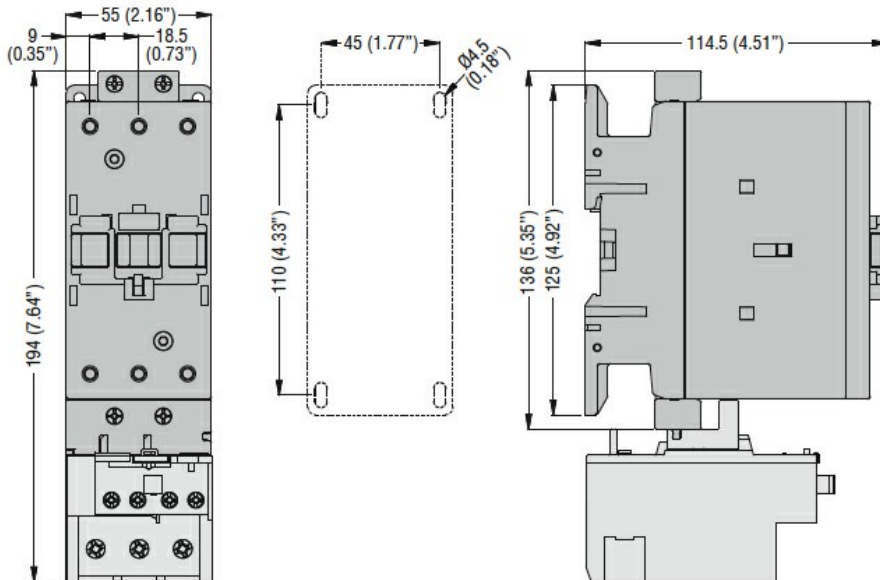

Wiring diagrams

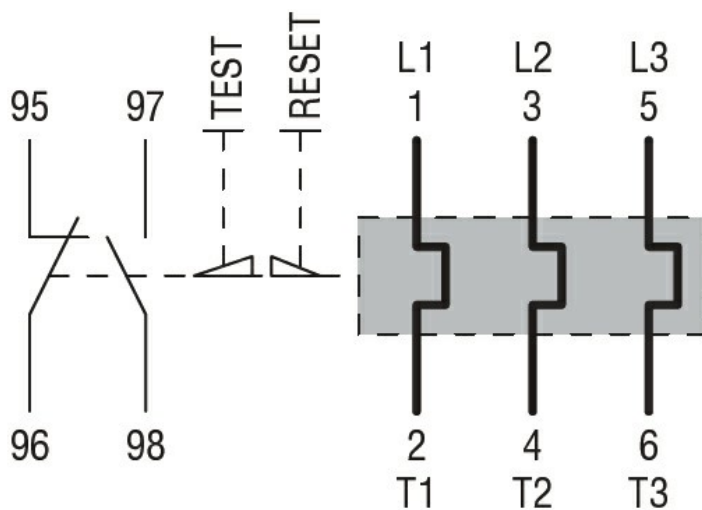

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-4-1

MOTOR PROTECTION RELAY, NON PHASE FAILURE/NON SINGLE-PHASE SENSITIVE.
THREE-POLE (THREE-PHASE), MANUAL RESETTING. DIRECT MOUNTING ON BF40 - BF94
CONTACTORS, 70...95A

UL508

Certifications

CCC

cULus

EAC