



Auxiliary contact characteristics

Type of contact	2NO		
Rated insulation voltage U_i IEC/EN	V	690	
Rated impulse withstand voltage U_{imp}	kV	4	
UL/CSA and IEC/EN 60947-5-1 designation	C600 - Q600		
Operating current AC15			
	24V	A	2.5
	48V	A	2.5
	60V	A	2.5
	110V	A	1.5
	230V	A	1.5
	400V	A	0.95
	500V	A	0.35
	690V	A	0.3

Operating current DC13

	24V	A	2.5
	48V	A	2.5
	60V	A	2.5
	110V	A	0.55
	125V	A	0.55
	220V	A	0.27
	600V	A	0.1

Operational characteristics

Rated supply voltage AC	VAC	400	
Rated frequency	Hz	50	
In-rush consumption	VA	12	
Holding consumption	VA	3.5	
Release voltage	Us	35...70	
Operating voltage	US	85...110	

Mechanical features

Tightening torque for terminals

min	Nm	1
max	Nm	1
min	lbin	9
max	lbin	9

Conductor section

AWG/Kcmil

min	18	
max	14	

Flexible w/o lug conductor section

min	mm ²	0.75
max	mm ²	2.5

Flexible c/w lug conductor section

min	mm ²	0.75
max	mm ²	2.5

Operating position

normal allowable	Vertical Any
------------------	--------------

Terminals

type	Screw
screw	M3.5
width	7.2
mm	
tool	Ph2

Weight

g	130
---	-----

Operations

Mechanical life

cycles	100000
--------	--------

Ambient conditions

Temperature

Operating temperature

min	°C	-20
max	°C	+60

Storage temperature

min	°C	-50
max	°C	+80


Max altitude

m	3000
---	------


IEC degree of protection

IP20

Dimensions

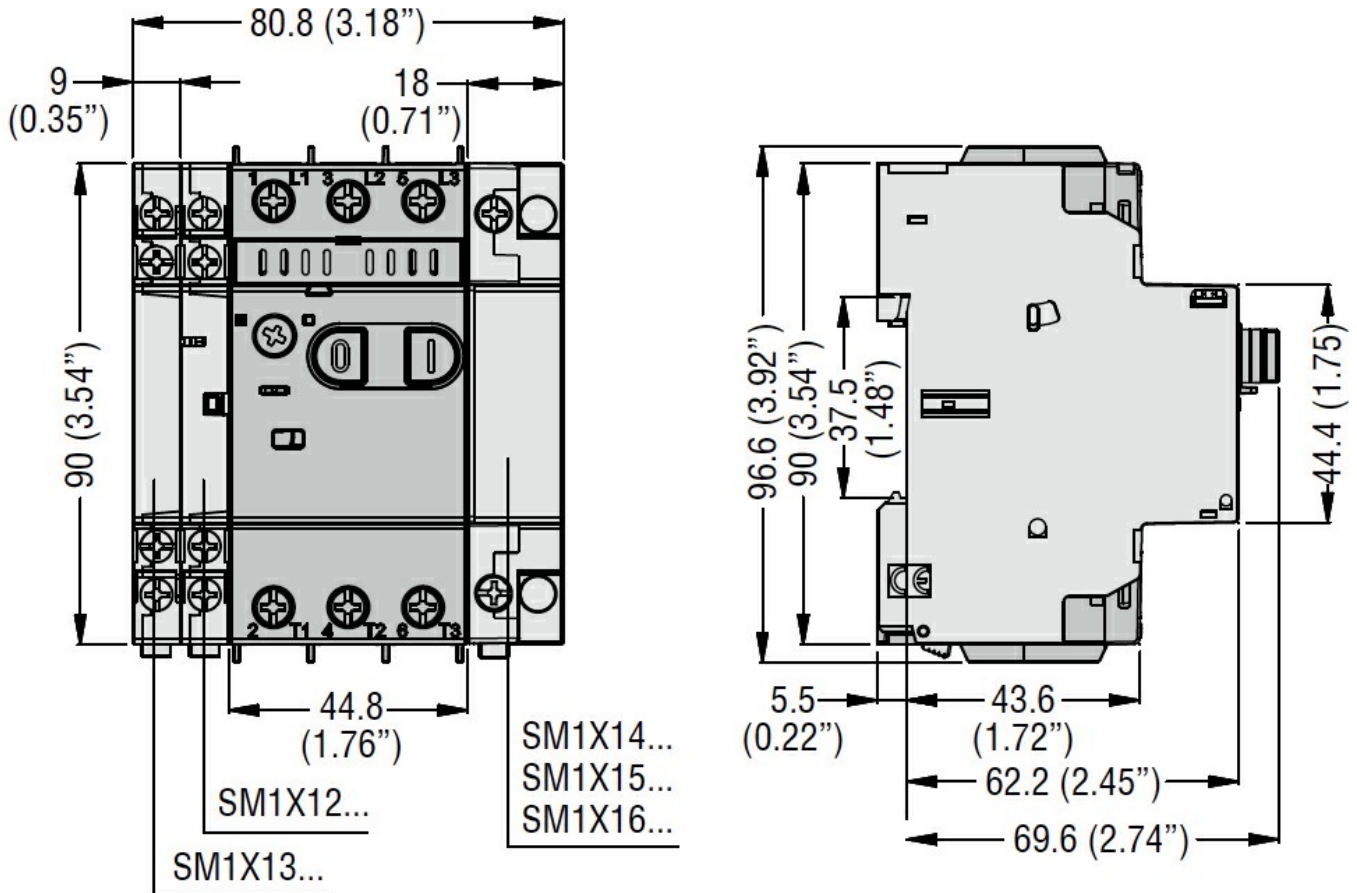

Wiring diagrams

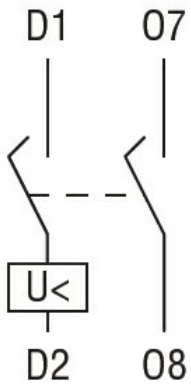

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification