



Mechanical features

Operating position

normal Other

Weight

g 115

Operations

Mechanical life

cycles 100000

Ambient conditions

Temperature

Operating temperature

min °C -20
max °C +60

Storage temperature

min °C -50
max °C +80


IEC degree of protection

IP65

UL degree of protection

4X

Dimensions

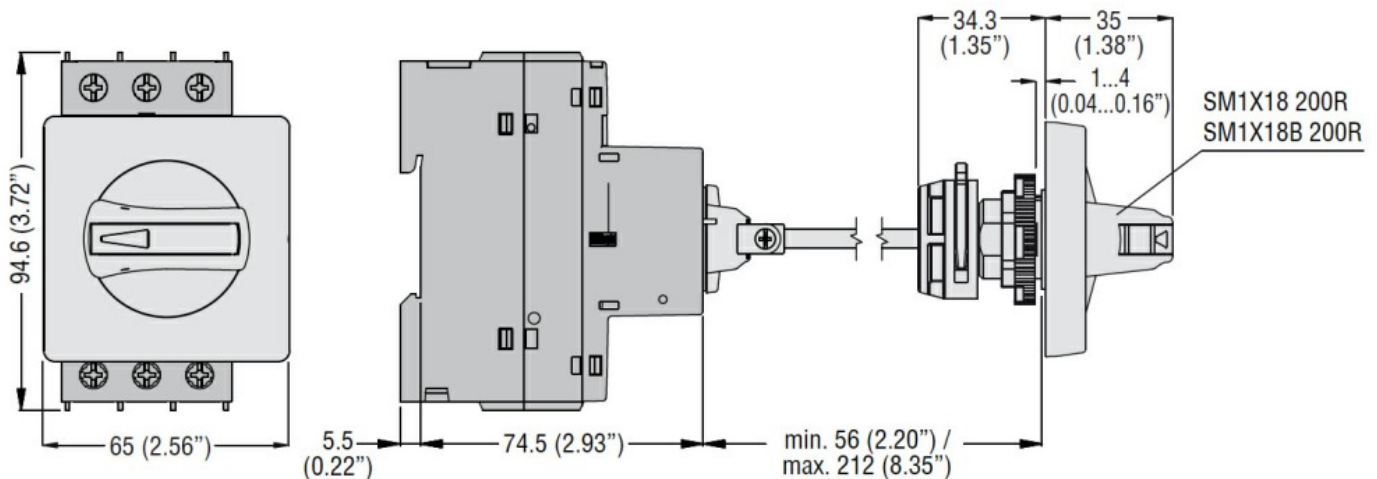

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification