



Operational characteristics


IEC maximum current (I_{max}) A 12

Mechanical features

Operating position normal Other

Weight g 19

Dimensions

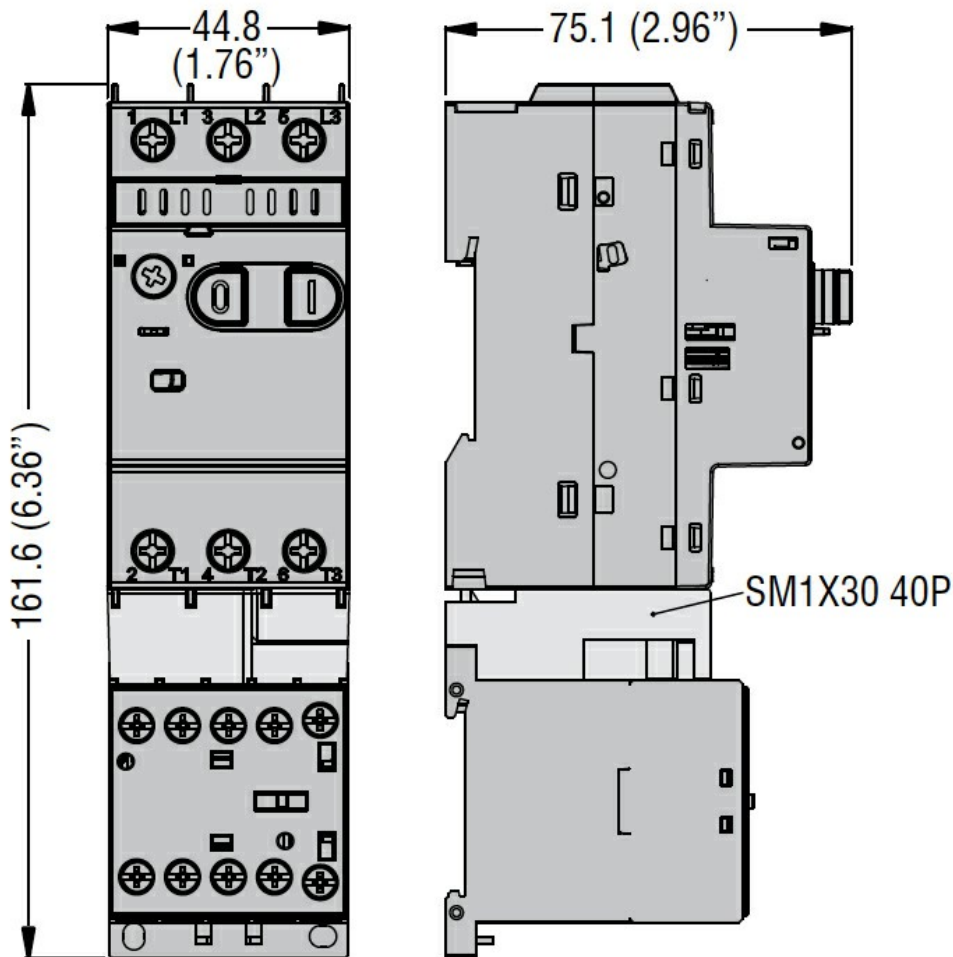

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification

