



**Safety parameters**

ISO 13849-1 security category	Cat. 4
ISO 13849-1 performance level	PLe

**Mechanical features**


Fixing	Both directions
Weight	g 26

**Ambient conditions**

Protection degree	IP67 and IP69K
-------------------	----------------

Temperature			
Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-25
	max	°C	+70

**Dimensions**

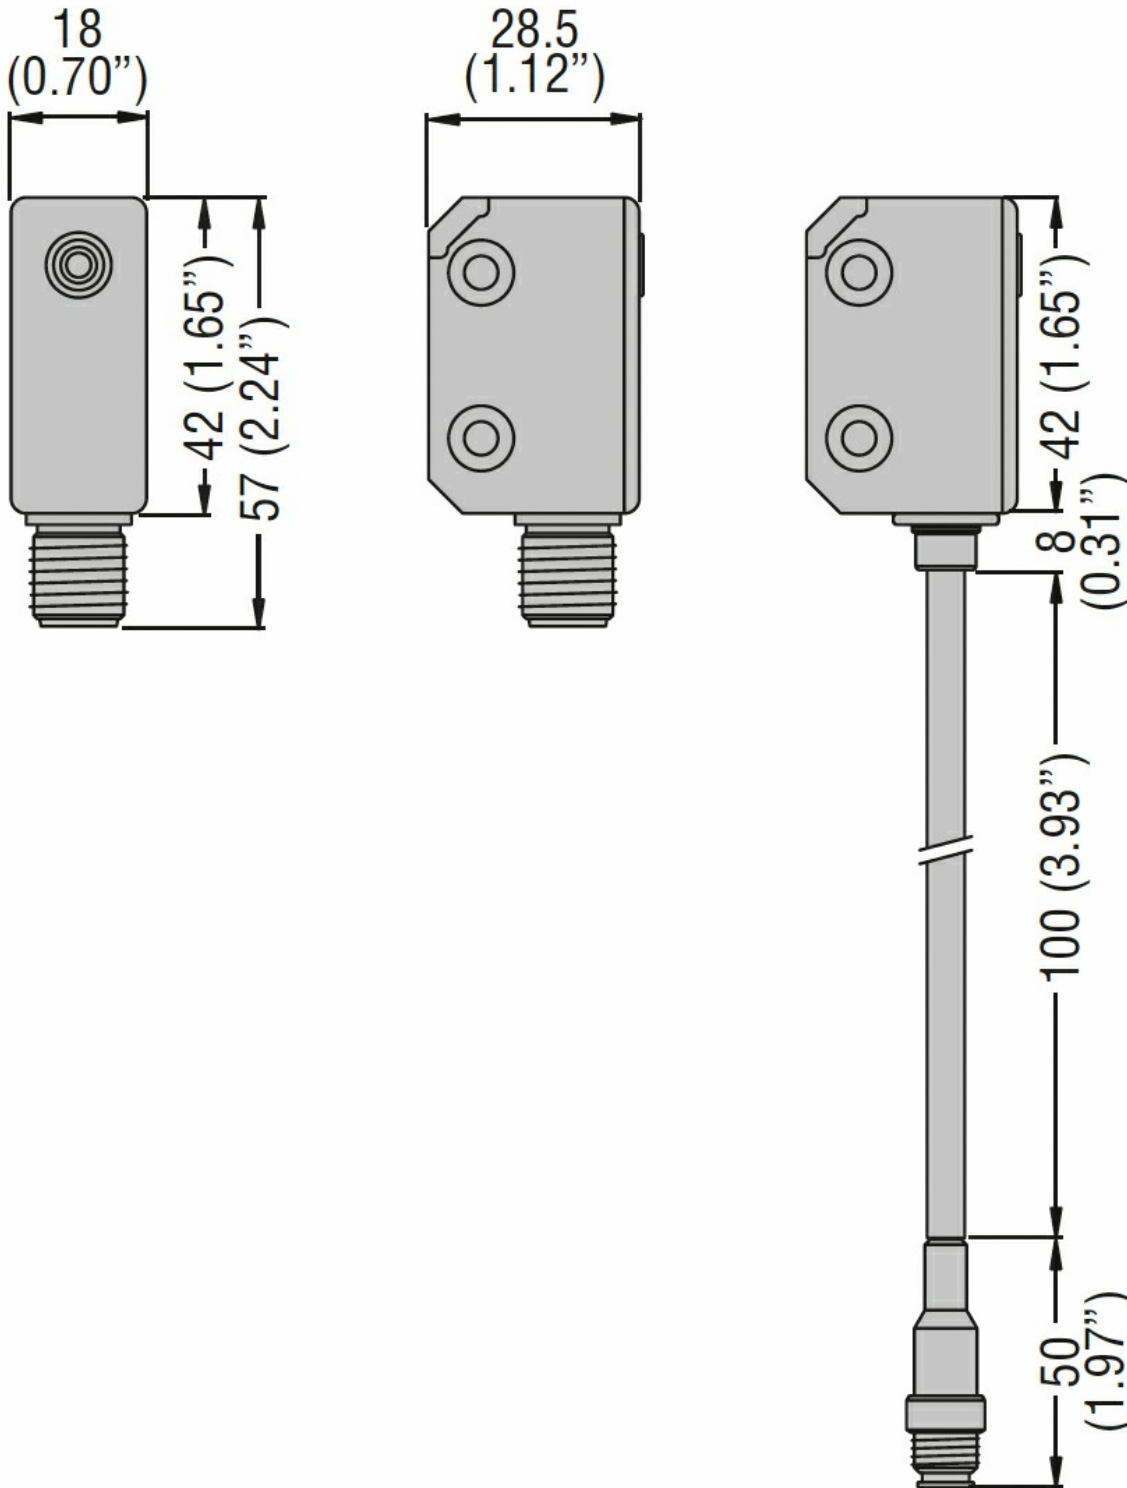

## Certifications and compliance

### Compliance

Cat. 4

EN/BS 61508-1 (SIL 3)

EN/BS 61508-2 (SIL 3)

EN/BS 61508-3 (SIL3)

IEC/BS 62061 (max. SIL 3).

PLe according to EN/BS 13849-1

---

Certificates

cULus  
TÜV

---

ETIM classification

ETIM 8.0

EC001449 -  
Device for  
monitoring of  
safety-related  
circuits