



General characteristics

| | | |
|----------------------------|-----|--|
| Rated power supply voltage | | 400...480VAC 50/60Hz |
| Rated output voltage | VAC | Three-phase 0... 480VAC 0-599Hz |
| Rated output current | A | 61 |
| Rated output power | kW | 30 |
| Rated output power | HP | 40 (Heavy load) / 50 (Standard load) |
| EMC filter | | Built-in EMC suppressor cat. C2 |
| Communication port | | RS485, Modbus- RTU |

Technical features

| | | | | |
|--------------------------------------|------------|--|---|-----|
| Input type | | Three-phase | | |
| Rated mains voltage | VAC | 400...480 | | |
| Operating mains voltage range | VAC | 340...528 | | |
| Rated mains frequency | Hz | 50/60 | | |
| Operating mains frequency range | Hz | 45...65 | | |
| Rated mains current with mains choke | | 54.9 (heavy load) / 69 (standard load) | | |
| Output type | | Three-phase | | |
| Output voltage range | VAC | 0...480 | | |
| Output frequency range | Hz | 0...599 | | |
| Current overload | %/s | 150% for 60s; 200% for 3s | | |
| Apparent output power | | 41 (heavy load) / 49 (standard load) | | |
| Power loss | | 4kHz: 680W (heavy load) / 810 (standard load) | | |
| Brake chopper | | Yes | | |
| Switching frequency | | 2...16kHz | | |
| Max motor cable length | | | | |
| | Shielded | | | |
| | | Without EMC category | m | 100 |
| | | Category C1 | m | 3 |
| | | Category C2 | m | 20 |
| | | Category C3 | m | 35 |
| | Unshielded | | | |
| | | Without EMC category | m | 200 |


Functions

| | |
|--|--|
| Motor control modes | V/f linear, quadratic torque, sensorless vector control, ECO mode, servo control with encoder feedback, multipoint V/f curve, V/f closed loop control with encoder feedback, torque setpoint, sensorless control for synchronous motors up to 22kW |
| Speed reference signals | External potentiometer 0...10kΩ Voltage signals: 0...10VDC or -10...+10VDC Current signals: 0/4...20mA Buttons on front keyboard Door-mount installation kit 15 preset speeds via digital inputs Motor potentiometer Fieldbus |
| 3-wire control | Yes |
| S-shape curves | Yes |
| Slip compensation | Yes |
| Flying restart | Yes |
| Access to DC bus | Yes |
| DC braking | Yes |
| DC injection at start | Yes |
| PID control | Yes, with sleep and rinse function |
| Sequencer (programmable frequency/time cycles) | Yes |
| Preset speeds | Yes |
| Motorpotentiometer | Yes |
| Different parameter configuration sets | Yes |
| Parameters changeover function | Yes |
| Favorite parameters menu | Yes |
| Autotuning | No |
| Safe torque Off (STO) safety function | Optional |
| PTC probe input | Yes |

| | |
|----------------------------|--|
| Protections | Overcurrent Output short circuit and earth/ground leakage Overvoltage Undervoltage Phase loss Motor heat overload (i2t) Overspeed Speed reverse |
| Special funct. | Multi-pump PID control (1 main pump frequency regulated + 2 auxiliary pumps activated in direct mode in case of necessity) |
| Input and Output | |
| Number of digital input | Nr. 5 |
| Digital input type | Selectable PNP or NPN logic |
| Number of digital output | Nr. 2 |
| Digital output arrangement | 1 relay output with changeover contact (C/O-SPDT) + 1 digital output |
| Output contacts ratings | Relay output: 3A 250VAC Digital output: 100mA max 30VDC |
| Number of analog input | Nr. 2 |
| Analog input type | Configurable 0/2...10VDC, -10...+10VDC, 0...5VDC, 0/4...20mA |
| Number of analog output | Nr. 1 |
| Analog output type | configurable as 0...10VDC, 0...5VDC, 2...10VDC, 0/4...20mA |
| Ambient conditions | |
| Temperature | |
| Operating temperature | |
| | min °C -10 |
| | max °C +55 |

| | | | |
|--------------------------|---------------------|----|---|
| | | | Switching frequency 2 or 4kHz: 2.5%/°C over 45°C switching frequency 8 or 16kHz: 2.5%/°C over 40°C |
| | Current derating | | |
| | Storage temperature | | |
| | min | °C | -25 |
| | max | °C | +60 |
| Relative humidity | | % | 5...95% (with no condensing) |
| Max altitude | | m | 4000m (over 1000m derate the rated current by 5%/1000m) |
| Maximum Pollution degree | | | 2 |
| Overvoltage category | | | III up to 2000m altitude (II above 2000m) |
| Housing | | | |
| Installation position | | | Vertical |
| IP degree of protection | | | IP20 |
| Dimensions (W x H x D) | | mm | Batch <=D 250 x 520 x 230 Batch >=E 180 x 384 x 165 |
| Weight | | Kg | 17.5 |

Dimensions

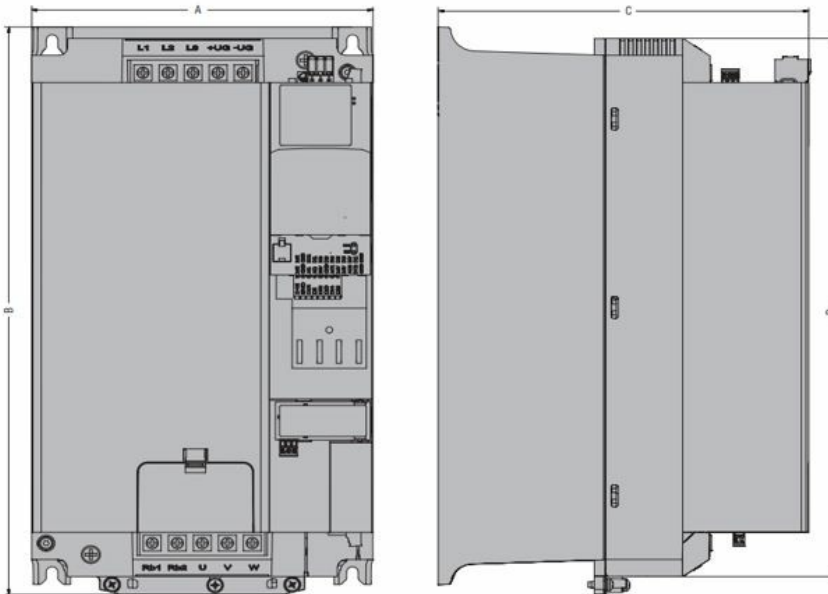

| | | | | |
|---------------------|-----|-----|-----|-----|
| Batch number | A | B | C | D |
| letter D or lower | 250 | 520 | 230 | 450 |
| letter E or greater | 180 | 384 | 165 | 342 |

Wiring diagrams



Certifications and compliance

Compliance

EN 61800-5-1
UL61800-5-1

Certificates

cULus
EAC
RCM

ETIM classification

ETIM 8.0

EC001857 -
Frequency
converter =< 1 kW