



**General characteristics**

Rated output current	A	90
Rated output power	kW	45


**Ambient conditions**


Temperature	Operating temperature	
	min	°C -10
	max	°C +55

**Housing**


Weight	Kg	16
--------	----	----

**Dimensions**

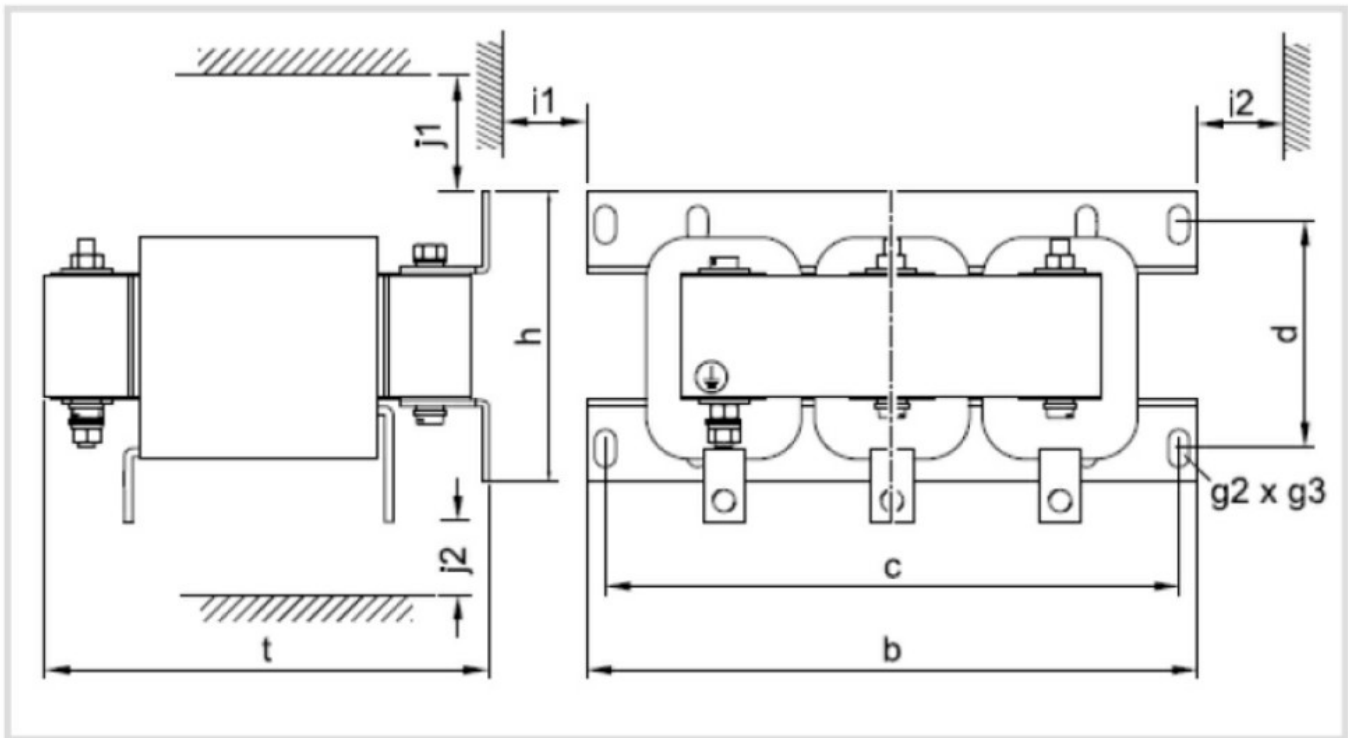

	b	h	t	c	d	g2 x g3	i1, i2	j1, j2	
	[mm]								
	[kg]								
<b>VLBX L330</b>	267	115	205	249	78.5	7 x 13	30	100	11.5
<b>VLBX L300</b>	267	139	205	249	102.5				16.5
<b>VLBX L190</b>	291	149	215	273	116.5	10 x 18			22.5
<b>VLBX L140</b>	352	144	265	328	103.5	10 x 16			25.0

**Wiring diagrams**

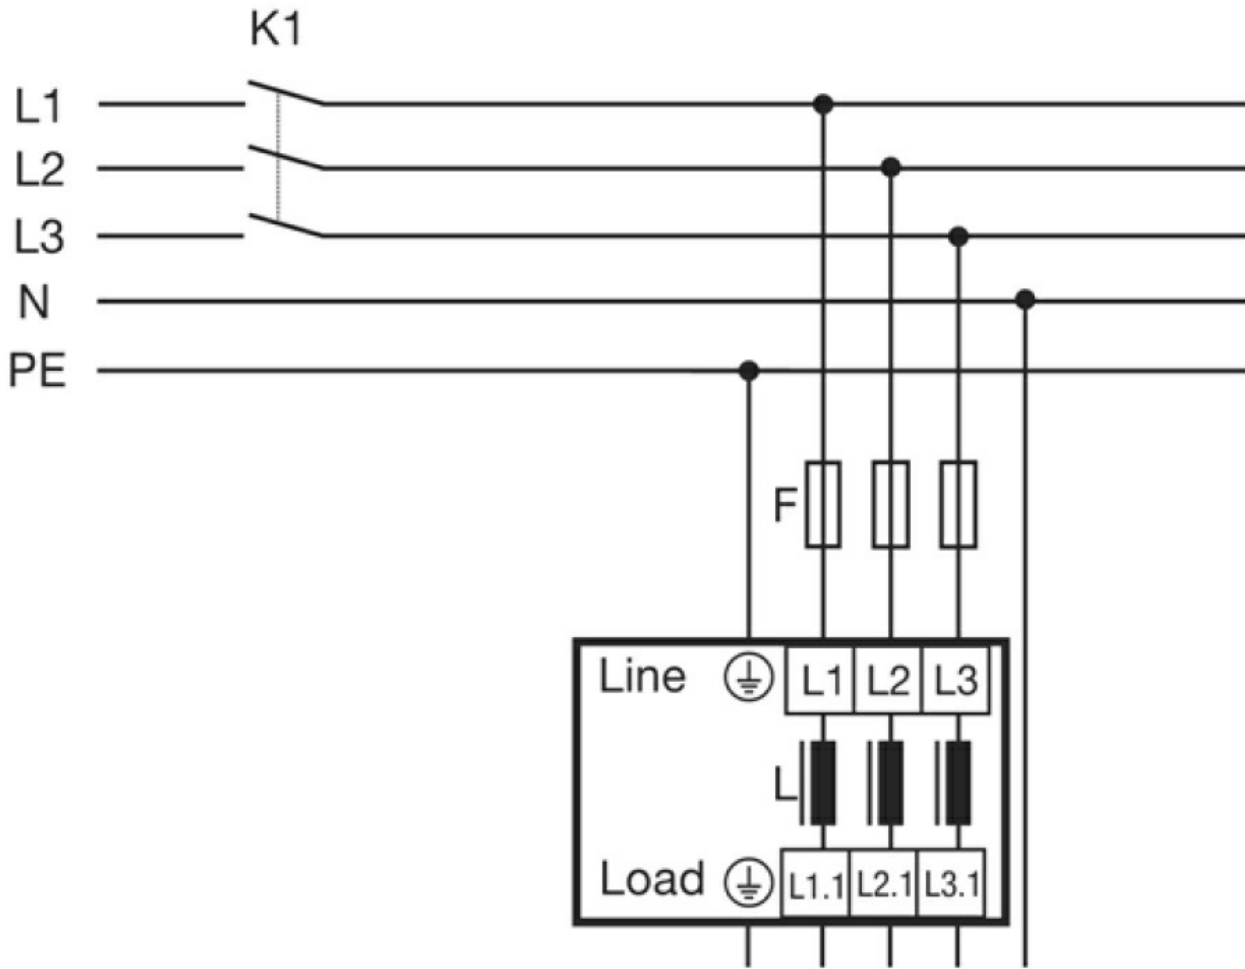

**Certifications and compliance**

Compliance

IEC/EN/BS 61558-1

**ETIM classification**

ETIM 8.0

EC002565 -  
 Filter circuit coil  
 for low-voltage