


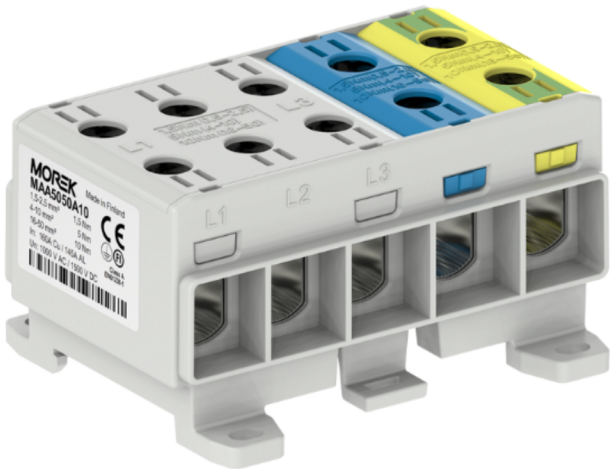

OTL50-5x gris/bleu/jaune-vert  
5x1xAl/Cu 1,5-50mm² 1500V Bloc de  
jonction  
MAA5050A10

|                   |                         |
|-------------------|-------------------------|
| Code produit      | MAA5050A10              |
| EAN               | 4744397040961           |
| Classe ETIM       | EC000897                |
| Serie de produits | Universal terminals OTL |
| Code CN8          | 85369010                |
| Unité             | pcs                     |
| Taille du paquet: | 8                       |
| Poids net         | 0,196 kg                |
| Longueur nette    | 0,0677 m                |
| Largeur nette     | 0,0861 m                |
| Profondeur nette  | 0,043 m                 |

|                                                                          |                               |
|--------------------------------------------------------------------------|-------------------------------|
| Connectable conductor cross section fine-strand without cable end sleeve | 1.5 - 35 mm²                  |
| Connectable conductor cross section fine-strand with cable end sleeve    | 1.5 - 35 mm²                  |
| Connectable conductor cross section solid-core                           | Inconnu                       |
| Connectable conductor cross section multi-wired                          | 1.5 - 50 mm²                  |
| Rated current In                                                         | 160 A                         |
| Rated voltage                                                            | 1500 V                        |
| Type of electrical connection 1                                          | Screw connection              |
| Type of electrical connection 2                                          | N'est pas applicable          |
| Number of levels                                                         | 1                             |
| Number of clamp positions per level                                      | 10                            |
| Mounting method                                                          | DIN rail (top hat rail) 35 mm |
| Material insulation body                                                 | Thermoplastic                 |
| Operating temperature                                                    | -25 - 80 °C                   |
| Inflammability class of insulation material according - to UL94          |                               |
| Width                                                                    | 86.1 mm                       |
| Height                                                                   | 43 mm                         |
| Depth                                                                    | 67.7 mm                       |
| Explosion-tested version 'Ex e'                                          | Non                           |
| Closing plate required                                                   | Non                           |
| Colour                                                                   | -                             |
| Internally connected stages                                              | Non                           |