


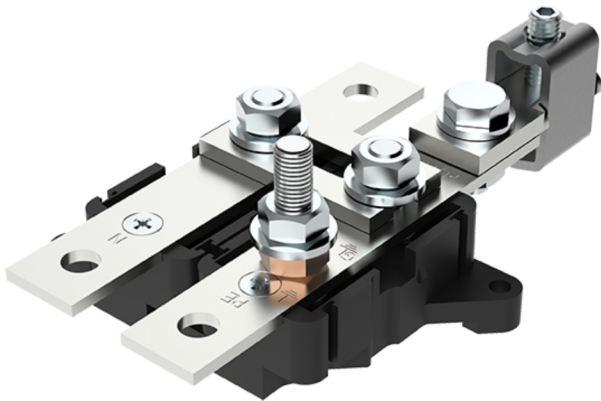

OL-PEN 95 connecteur Al/Cu 25-95mm²

MAJ4095S10

|                   |                                |
|-------------------|--------------------------------|
| Code produit      | MAJ4095S10                     |
| EAN               | 4744397029522                  |
| Classe ETIM       | EC000897                       |
| Serie de produits | Splitting grounding connectors |
| Code CN8          | 85369010                       |
| Unité             | pcs                            |
| Taille du paquet: | 1                              |
| Poids net         | 0,544 kg                       |
| Longueur nette    | 0,144 m                        |
| Largeur nette     | 0,094 m                        |
| Profondeur nette  | 0,055 m                        |

|                                                                          |                      |
|--------------------------------------------------------------------------|----------------------|
| Connectable conductor cross section fine-strand without cable end sleeve | 25 - 95 mm²          |
| Connectable conductor cross section fine-strand with cable end sleeve    | 25 - 95 mm²          |
| Connectable conductor cross section solid-core                           | N'est pas applicable |
| Connectable conductor cross section multi-wired                          | 25 - 95 mm²          |
| Rated current In                                                         | N'est pas applicable |
| Rated voltage                                                            | 690 V                |
| Type of electrical connection 1                                          | Screw connection     |
| Type of electrical connection 2                                          | Bolt connection      |
| Number of levels                                                         | 1                    |
| Number of clamp positions per level                                      | 5                    |
| Mounting method                                                          | Direct mounting      |
| Material insulation body                                                 | Thermoplastic        |
| Operating temperature                                                    | -- 80 °C             |
| Inflammability class of insulation material according - to UL94          |                      |
| Width                                                                    | 94 mm                |
| Height                                                                   | 55 mm                |
| Depth                                                                    | 144 mm               |
| Explosion-tested version 'Ex e'                                          | Non                  |
| Closing plate required                                                   | Non                  |
| Colour                                                                   | Black                |
| Internally connected stages                                              | Non                  |