


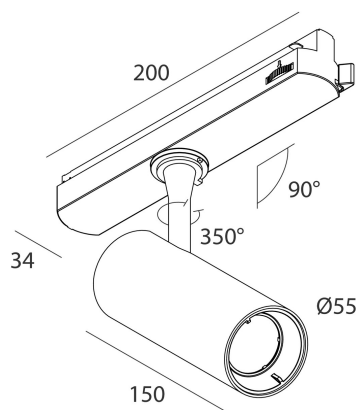

Features

Use: Indoor
Type of installation: TRACK
Emission: ADJUSTABLE
Optics: SPOT
Beam: 38°
Colour: WHITE
Dimming: ON/OFF
Emergency: NO
L: 200mm
A: Ø55mm
H: 150mm
Warranty: 5 years
Weight: 0.8kg

Tech data

Luminaire input power: 20W
Luminaire luminous flux: 1767lm
IP: 20
Insulation class: II
No. of driver per product: 1
Supply voltage: 220-240V 50/60Hz
SELV: Si

Source

Light source: LED
Source power: 20W
Source luminous flux: 1980lm
Colour temperature: 4000K
CRI: >90
LED lifespan: 50000h L80 B10

Compliance

CEI EN 60598-1:2015 + A11:2009. IEC 60598-2:2015 2-1

Standards

Photobiological risk: RISK GROUP 1 Certified fixture in RISK GROUP 1 (Low Risk)-The fixture does not pose a hazard due to normal behavioral limitations on exposure - in accordance with CEI EN 62471:2010-01, IEC TR 62778:2014.

CAM edilizia: The product complies with the requirements for public buildings, ministerial decree of 23rd June 2022 n.256.

[DALÌ: View more product info](#)

SCREENS



DALI: LENTE F15 PER 20W

106133.00



DALI: LENTE F55 PER 20W

106113.00

COMPLETION ACCESSORIES



DALI: INSERTO ORO OPACO PER 20W

106109.15



DALI: HONEYCOMB PER 20W

106111.02