


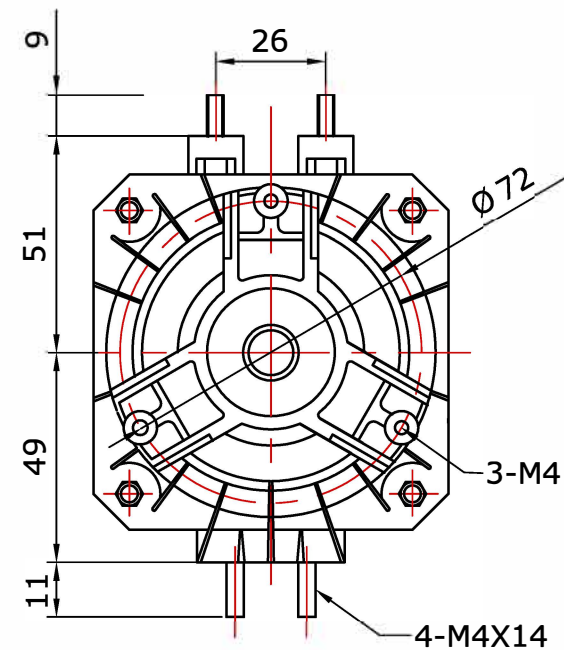

42  

MOTOR PROTECTION	Impedance protected
INSULATION CLASS	H
PROTECTION CLASS	IP 42
BEARINGS	Sleeve bearings
LUBRICATING OIL	PERMAWICK 284#
ELECTRICAL CONNECTION	VDE 3× 0.5mm ² lead wire 470-530mm free length
BRACKET	/
FAN BLADES	φ 230 / 28°

				DECIMAL	TOLERANCE		SIGN	DATE	TITLE FAN MOTOR 10W
				X	± 0.5	DRN.BY	NOKEYLEE	2005.9.2	
				X.X	± 0.25	CHD.BY	ANSON	2005.9.2	
A	Ø 25.4 Ø 25			X.XX	± 0.15	ENG.BY			PROJECTION 
REV.	DESCRIPTION	APPROVED	DATE	ANGLE	± 3°	APP.BY			