




Application-Based Licensing Model				
Item Description	Code Size	I/O Channels	Features*	Item Number
Control Standard S	3 MB	512 I/O	4 x CANopen*/J1939, Modbus*/PROFIBUS*, 1 x EtherNet/IP™, PROFINET®, EtherCAT®, Dynamic C Code	2762-2006/211-1000
Control Standard M	5 MB	1,024 I/O	8 x CANopen*/J1939, Modbus*/PROFIBUS*, 1 x EtherNet/IP™, PROFINET®, EtherCAT®, Dynamic C Code	2762-2007/211-1000
Control Standard L	6 MB	4,096 I/O	10 x CANopen*/J1939, Modbus*/PROFIBUS*, 2 x EtherNet/IP™, PROFINET®, EtherCAT®, Dynamic C Code, Task Group Assignment	2762-2008/211-1000
*Includes Local I/O, Visualization S / Communication S, Data Source Manager				
Visualization S	128 Tags/Target-WebVisu			
Communication S	512 Tags/OPC-UA Client/Server & Symbol Variables			
Additional Features				
Item Description	Item Number			
Visualization M	2,048 Tags/Target-WebVisu	2762-2202/211-1000		
Visualization L	4,096 Tags/Target-WebVisu	2762-2203/211-1000		
Visualization XL	8,192 Tags/Target-WebVisu	2762-2204/211-1000		
Communication M	4,096 Tags/OPC-UA Client/Server & Symbol Variables	2762-2102/211-1000		
Communication XL	Unlimited Tags/OPC-UA Client/Server & Symbol Variables	2762-2105/211-1000		

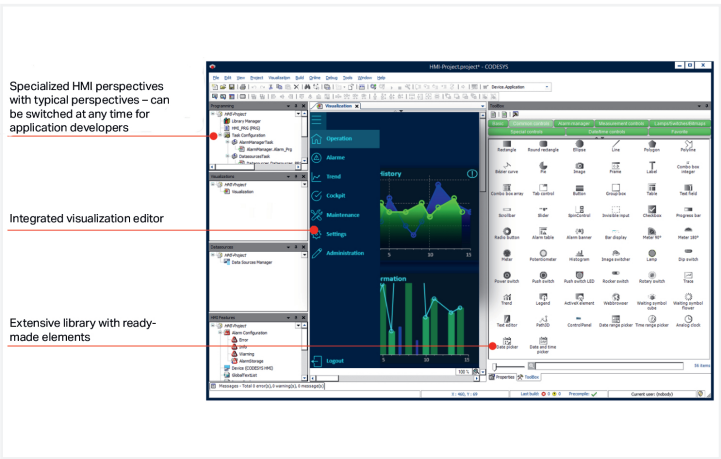

This application-based license is specifically designed for use with CODESYS Virtual Control for Linux SL. It enables CODESYS Visualization with support for up to 2048 data points.

CODESYS Visualization is an add-on product for CODESYS Control SL that provides a graphical user interface (visualization/HMI). Depending on the device's expansion level, the visualization can be used as either WebVisu or TargetVisu.

CODESYS WebVisu enables graphical user interfaces to be displayed on HTML5-capable web browsers connected to the control device via a data network.

CODESYS TargetVisu allows graphical user interfaces to be displayed directly on the control unit's panel, provided the device includes a display.

Data points are IEC variables used within the visualization. Complex elements, such as tables or trends, use additional criteria to determine the required number of data points. The following licenses are available for CODESYS Visualization.

Benefits of CODESYS Visualization:

- Integrated into the CODESYS Development System for seamless visualization/HMI development
- Enables development independently or combined with the PLC application within a single project
- Supports scalable projects with unlimited usable data points
- Simplified application creation through executed project configuration
- Access to data in the control network via data sources
- Expandable element library, including user-created visualizations with parameter interfaces
- Direct loading of visualizations from the development environment to the controller
- Comprehensive display of all CODESYS Visualization functions and elements, including alarm management, trace and trend display, user management, recipe management, visualization styles, multilingual support, and integration of HTML5 controls within CODESYS WebVisu

Licensing

Single Device License: The license can be used on the controller where the CODESYS runtime system is installed. The license is activated in a software-based container (soft container) that is permanently bound to the controller.

Note: Without a license, the software will run in demo mode for two hours. After that, a manual restart is required.

Please note that the use of these application-based licenses requires CODESYS Development System V3.5.19.7 or higher and CODESYS Virtual Control SL Runtime Software Version 4.12.0.0 or higher.

Source:
The required software can be obtained from the WAGO Download Center:
CODESYS: <https://downloadcenter.wago.com/latest-of-productgroup/codesys>
Runtime: <https://downloadcenter.wago.com/software/latest/runtime-codesys-virtual-control-linux>

Demo Mode

A controller without a license runs in demo mode for two hours. After this period, the runtime system will shut down and must be restarted manually. The functionality of demo mode is not restricted, but unlicensed functions have a shorter demo runtime (e.g., fieldbuses operate for 30 minutes).

License Check

When an application-based license is available on the controller, all criteria are checked against the limit stored in the license. If any criteria exceed the defined limit, the application download or boot application loading will be blocked. No transition to demo mode occurs.

This prevents the system from reverting to a time-limited demo mode during production.



Livraison		
Type de licence	License for a maximum of 2,048 tags/Target WebVisu	
Type de livraison	Certificat de licence par e-mail (le logiciel est disponible en téléchargement).	
Remarque Type de licence	Une licence unique permet l'installation sur un ordinateur. Chaque appareil nécessite une licence.	
Remarque Type de licence (2)	Pour l'activation de la licence, une connexion Internet peut-être nécessaire.	
Génération de licence	CODESYS	

Données commerciales		
Unité d'emb. (SUE)	1 pce(s)	
Type d'emballage	pas de données	
Pays d'origine	QU	
GTIN	4066966504880	
Numéro du tarif douanier	88888888888	

Product Classification		
UNSPSC	43233603	
ETIM 9.0	EC001435	
ECCN	NO US CLASSIFICATION	

Conformité environnementale du produit		
État de conformité RoHS	Compliant,No Exemption	

Téléchargements		
Conformité environnementale du produit		
Recherche de conformité		
Environmental Product Compliance 2762-2202/211-1000		

Logiciel d'ingénierie		
Logiciel de configuration et de mise en service		
CODESYS V3.5	png 315.13 KB	
CODESYS Virtual Control SL	png 89.57 KB	