

CXX LD 41G**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Figure similaire

Informations générales de commande

Version	CUBESERIES, Module LED avec diode de roue libre, Tension nominale: 6...24 V DC, Raccordement enfichable
Référence	3053310000
Type	CXX LD 41G
GTIN (EAN)	4099987023115
Qté.	20 pièce(s)

CXX LD 41G**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Caractéristiques techniques**Dimensions et poids**

Profondeur	25,7 mm	Profondeur (pouces)	1,012 inch
Hauteur	9,2 mm	Hauteur (pouces)	0,362 inch
Largeur	12,8 mm	Largeur (pouces)	0,504 inch
Poids net	2 g		

Températures

Température de stockage	-40 °C...85 °C	Température de fonctionnement	-40 °C...70 °C
-------------------------	----------------	-------------------------------	----------------

Classifications

ETIM 6.0	EC002586	ETIM 7.0	EC002586
ETIM 8.0	EC002586	ETIM 9.0	EC002586
ETIM 10.0	EC002586	ECLASS 9.1	27-37-10-10
ECLASS 10.0	27-37-10-10	ECLASS 11.0	27-37-16-92
ECLASS 12.0	27-37-16-92	ECLASS 13.0	27-37-16-92
ECLASS 14.0	27-37-16-92	ECLASS 15.0	27-37-16-92

Côté commande

Tension nominale	6...24 V DC	Courant nominal DC	6,7 mA
Indicateur d'état	LED verte	Circuit de protection	Diode de roue libre

Caractéristiques générales

Couleur	noir		
Composant de classe d'inflammabilité UL94	Composante .	Boîtier	
	Classe d'inflammabilité UL94 .	V-2	

Caractéristiques de raccordement

Technique de raccordement de conducteurs	Raccordement enfichable
--	-------------------------

Conformité environnementale du produit

Statut de conformité RoHS	Conforme sans exemption
REACH SVHC	No SVHC above 0.1 wt%

Agréments

ROHS	Conforme
------	----------

Téléchargements

Données techniques	CAD data – STEP
Catalogue	Catalogues in PDF-format

CXX LD 41G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany


www.weidmueller.com

Dessins

Connection diagram

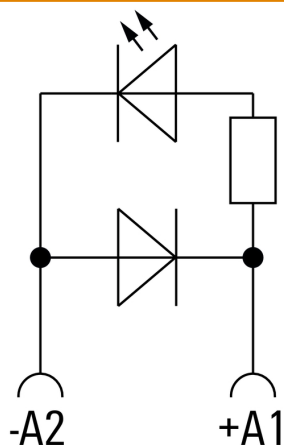

Dimensional drawing

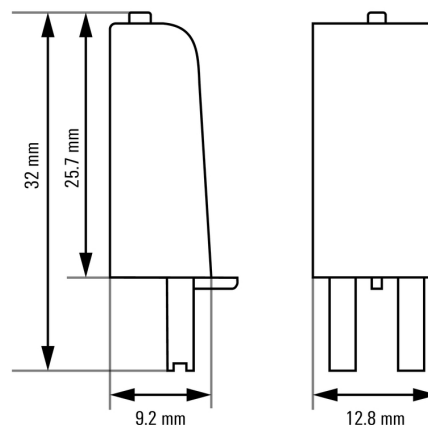

CXX LD 41G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Dessins

Miscellaneous

Type code CUBESERIES LED / protective module versions

Product family					Input voltage and LED color
C CUBESERIES					21N 6-230 V DC
Product type					41R 6-24 V DC LED red
X Accessories					41G 6-24 V DC LED green
Accessory for which relay desing					42R 24-60 V DC LED red
X Universal use					42G 24-60 V DC LED green
Function					43R 110-230 V DC LED red
L LED					43G 110-230 V DC LED green
D Free-wheeling diode					51 6-24 V AC/DC
LD LED and free-wheeling diode					52 24-60 V AC/DC
V Varistor					53 110-240 V AC/DC
RC RC element					61R 6-24 V AC/DC LED red
					61G 6-24 V AC/DC LED green
					62R 24-60 V AC/DC LED red
					62G 24-60 V AC/DC LED green
					63R 110-240 V AC/DC LED red
					63G 110-240 V AC/DC LED green
					71 6-24 V AC
					72 110-130 V AC
					73 220-240 V AC