


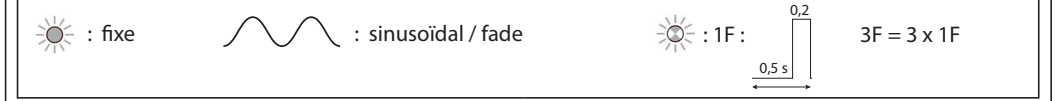
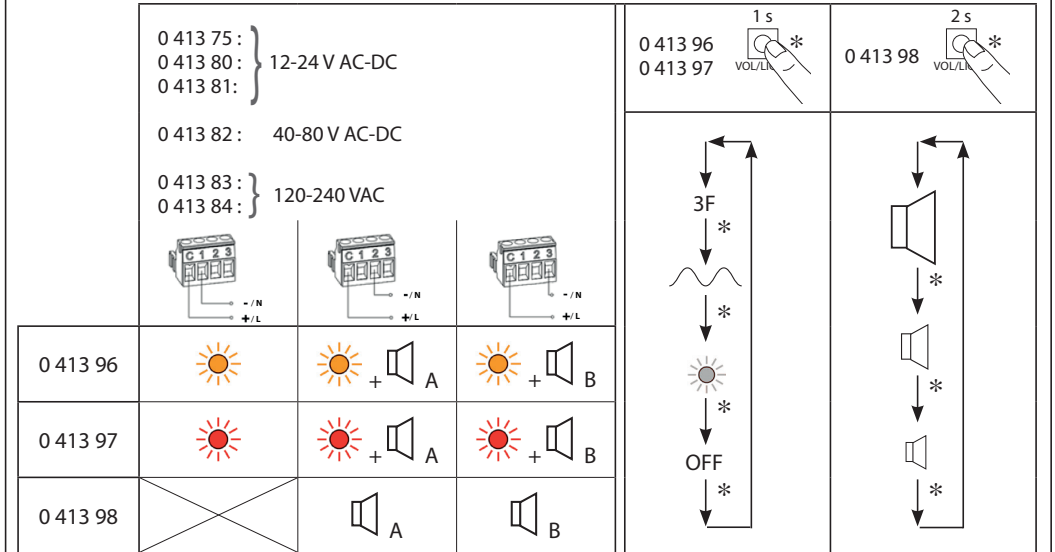


| | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-----------------|-----------------------------|--|-------------|----------|------|--------|--------|------|--------|--------|------|--------|-------|------|-------|-------|-------|-------|-------|
| | <ul style="list-style-type: none"> • Livré avec : <ul style="list-style-type: none"> - 1 joint d'étanchéité (base) - 1 attache câble • Geleverd met : <ul style="list-style-type: none"> - 1 afdichtingsring (base) - 1 kabelhouder | <p>0 413 96</p> | 600 cd 87 ->105 dB (1m) | <table border="0"> <tr> <td>0 413 96/97</td> <td>0 413 98</td> </tr> <tr> <td>12 V</td> <td>315 mA</td> <td>280 mA</td> </tr> <tr> <td>24 V</td> <td>280 mA</td> <td>185 mA</td> </tr> <tr> <td>40 V</td> <td>110 mA</td> <td>70 mA</td> </tr> <tr> <td>80 V</td> <td>75 mA</td> <td>55 mA</td> </tr> <tr> <td>240 V</td> <td>50 mA</td> <td>35 mA</td> </tr> </table> | 0 413 96/97 | 0 413 98 | 12 V | 315 mA | 280 mA | 24 V | 280 mA | 185 mA | 40 V | 110 mA | 70 mA | 80 V | 75 mA | 55 mA | 240 V | 50 mA | 35 mA |
| 0 413 96/97 | 0 413 98 | | | | | | | | | | | | | | | | | | | | |
| 12 V | 315 mA | 280 mA | | | | | | | | | | | | | | | | | | | |
| 24 V | 280 mA | 185 mA | | | | | | | | | | | | | | | | | | | |
| 40 V | 110 mA | 70 mA | | | | | | | | | | | | | | | | | | | |
| 80 V | 75 mA | 55 mA | | | | | | | | | | | | | | | | | | | |
| 240 V | 50 mA | 35 mA | | | | | | | | | | | | | | | | | | | |
| | <ul style="list-style-type: none"> • Supplied with : <ul style="list-style-type: none"> - 1 seal (base) - 1 cable fastener • Mitgeliefert werden : <ul style="list-style-type: none"> - 1 dichtung (base) - 1 Kabelbinder • Entregado con : <ul style="list-style-type: none"> - 1 junto de estanqueidad (base) - 1 brida de estanqueidad • Fornita con : <ul style="list-style-type: none"> - 1 guarnizione di tenuta (base) - 1 attacco cavo | <p>0 413 97</p> | 1100 cd 87 ->105 dB (1m) | <p>IP 44 : + 0 413 80/75/84</p> <p>IP 65 : + 0 413 81/82/83</p> <p>IK 08</p> | | | | | | | | | | | | | | | | | |

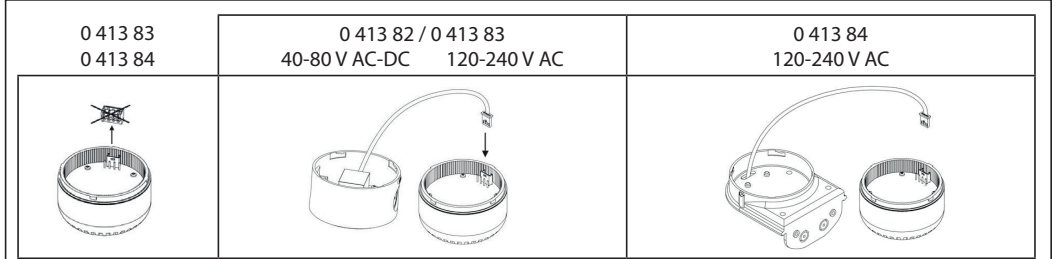

| | | |
|--|--|--------------|
| | <p>0 413 80</p> <ul style="list-style-type: none"> • Socle faible hauteur 12-24 V AC-DC • Lage Hoogte Base 12-24 V AC-DC • Low profile base 12-24 V AC-DC • Geringe Höhe 12-24 V AC-DC • Base baja altura 12-24 V AC-DC • Base altezza bassa 12-24 V AC-DC | <p>44 g</p> |
| | <p>0 413 81</p> <ul style="list-style-type: none"> • Socle IP65 12-24 V AC-DC • Base IP65 12-24 V AC-DC • Base IP65 12-24 V AC-DC • Base IP65 12-24 V AC-DC • Base IP65 12-24 V AC-DC • Base IP65 12-24 V AC-DC | <p>63 g</p> |
| | <p>0 413 82</p> <ul style="list-style-type: none"> • Socle IP65 40-80 V AC-DC • Base IP65 40-80 V AC-DC • Base IP65 40-80 V AC-DC • Base IP65 40-80 V AC-DC • Base IP65 40-80 V AC-DC • Base IP65 40-80 V AC-DC | <p>110 g</p> |
| | <p>0 413 83</p> <ul style="list-style-type: none"> • Socle IP65 120-240 V AC • Base IP65 120-240 V AC • Base IP65 120-240 V AC • Base IP65 120-240 V AC • Base IP65 120-240 V AC • Base IP65 120-240 V AC | <p>116 g</p> |
| | <p>0 413 75</p> <ul style="list-style-type: none"> • Socle en applique 12-24 V AC-DC • Wandbasis 12-24 V AC-DC • Wall base 12-24 V AC-DC • Wandboden 12-24 V AC-DC • Base de pared 12-24 V AC-DC • Base di parete 12-24 V AC-DC | <p>155 g</p> |
| | <p>0 413 84</p> <ul style="list-style-type: none"> • Socle en applique 120-240 V AC • Wandbasis 120-240 V AC • Wall base 120-240 V AC • Wandboden 120-240 V AC • Base de pared 120-240 V AC • Base di parete 120-240 V AC | <p>213 g</p> |

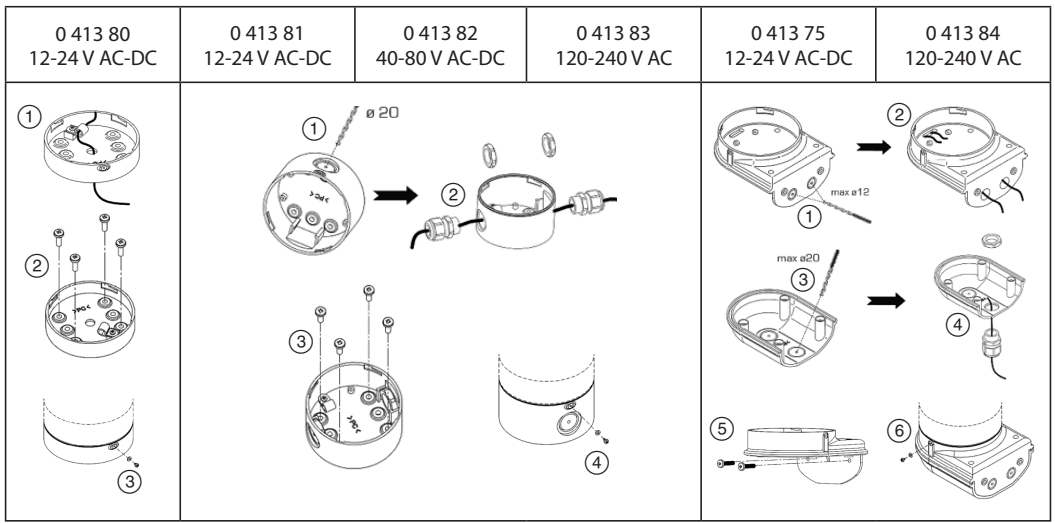





Switch A



| | | F (Hz) | | 1 | 2 | 3 | 4 | 5 |
|----|--|-------------|--|---|---|---|---|---|
| 1 | | 600 - 700 | : 0,5 s ON / 0,5 s OFF | 0 | 0 | 0 | 0 | 0 |
| 2 | | 440 - 560 | : 0,565 s ON / 0,565 s OFF | 0 | 0 | 0 | 0 | 1 |
| 3 | | 800 - 970 | : 0,25 s ON / 0,25 s OFF | 0 | 0 | 0 | 1 | 0 |
| 4 | | 800 - 970 | : 0,8 s ON / 0,8 s OFF | 0 | 0 | 0 | 1 | 1 |
| 5 | | 1000 - 2000 | : 1 s ON / 1 s OFF | 0 | 0 | 1 | 0 | 0 |
| 6 | | 420 | 0,625 s ON / 0,625 s OFF | 0 | 0 | 1 | 0 | 1 |
| 7 | | 660 | 0,15 s ON / 0,15 s OFF | 0 | 0 | 1 | 1 | 0 |
| 8 | | 660 | 1,8 s ON / 1,8 s OFF | 0 | 0 | 1 | 1 | 1 |
| 9 | | 660 | 0,5 s ON / 0,5 s OFF | 0 | 1 | 0 | 0 | 0 |
| 10 | | 720 | 0,7 s ON / 0,3 s OFF | 0 | 1 | 0 | 0 | 1 |
| 11 | | 750 | 0,33 s ON / 0,5 s OFF | 0 | 1 | 0 | 1 | 0 |
| 12 | | 800 | 0,25 s ON / 1 s OFF | 0 | 1 | 0 | 1 | 1 |
| 13 | | 970 - 800 | (0,35 s ON / 0,35 s ON / 0,35 s OFF) x 3 + 1,5 s OFF | 0 | 1 | 1 | 0 | 0 |
| 14 | | 970 | (0,5 s ON / 0,5 s OFF) x 3 + 1,5 s OFF | 0 | 1 | 1 | 0 | 1 |
| 15 | | 970 | 0,25 s ON / 0,25 s OFF | 0 | 1 | 1 | 1 | 0 |
| 16 | | 2850 | 1 s ON / 1 s OFF | 0 | 1 | 1 | 1 | 1 |
| 17 | | 2850 | 0,25 s ON / 0,25 s OFF | 1 | 0 | 0 | 0 | 0 |
| 18 | | 300 | - | 1 | 0 | 0 | 0 | 1 |
| 19 | | 660 | - | 1 | 0 | 0 | 1 | 0 |
| 20 | | 750 | - | 1 | 0 | 0 | 1 | 1 |
| 21 | | 2850 | - | 1 | 0 | 1 | 0 | 0 |
| 22 | | 500 - 1200 | : 3,5 s ON / 0,5 s OFF | 1 | 0 | 1 | 0 | 1 |
| 23 | | 500 - 1200 | (0,5 s ON / 0,5 s OFF) x 3 + 1,5 s OFF | 1 | 0 | 1 | 1 | 0 |
| 24 | | 800 - 970 | (0,5 s ON / 0,5 s OFF) x 3 + 1,5 s OFF | 1 | 0 | 1 | 1 | 1 |
| 25 | | 1000 - 1700 | : 0,25 s ON | 1 | 1 | 0 | 0 | 0 |
| 26 | | 1000 - 1700 | : 0,8 s ON | 1 | 1 | 0 | 0 | 1 |
| 27 | | 1000 - 3000 | : 0,64 s ON | 1 | 1 | 0 | 1 | 0 |
| 28 | | 1000 - 3000 | : 0,32 s ON | 1 | 1 | 0 | 1 | 1 |
| 29 | | Random | - | 1 | 1 | 1 | 0 | 0 |
| 30 | | Random | 0,5 s ON / 0,5 s OFF | 1 | 1 | 1 | 0 | 1 |
| 31 | | 700 - 600 | : 0,9 s ON / 1,4 s ON / 1 s OFF | 1 | 1 | 1 | 1 | 0 |
| 32 | | 554 - 440 | : 0,9 s ON / 1,4 s ON / 1 s OFF | 1 | 1 | 1 | 1 | 1 |



Switch B



| | | F (Hz) | | 1 | 2 | 3 | 4 | 5 |
|----|--|-------------|--|---|---|---|---|---|
| 33 | | 480 - 610 | : 0,5 s ON / 0,5 s OFF | 0 | 0 | 0 | 0 | 0 |
| 34 | | 970 - 630 | : 0,5 s ON / 0,5 s OFF | 0 | 0 | 0 | 0 | 1 |
| 35 | | 554 - 440 | : 0,1 s ON / 0,4 s OFF | 0 | 0 | 0 | 1 | 0 |
| 36 | | 440 - 554 | : 0,5 s ON / 0,5 s OFF | 0 | 0 | 0 | 1 | 1 |
| 37 | | 510 - 610 | : 0,5 s ON / 0,5 s OFF | 0 | 0 | 1 | 0 | 0 |
| 38 | | 510 - 610 | : 1 s ON / 1 s OFF | 0 | 0 | 1 | 0 | 1 |
| 39 | | 600 - 700 | : 1 s ON / 1 s OFF | 0 | 0 | 1 | 1 | 0 |
| 40 | | 550 - 1000 | : 0,5 s ON / 0,5 s OFF | 0 | 0 | 1 | 1 | 1 |
| 41 | | 550 - 1000 | : 1 s ON / 1 s OFF | 0 | 1 | 0 | 0 | 0 |
| 42 | | 800 - 1000 | : 0,5 s ON / 0,5 s OFF | 0 | 1 | 0 | 0 | 1 |
| 43 | | 800 - 1000 | : 1 s ON / 1 s OFF | 0 | 1 | 0 | 1 | 0 |
| 44 | | 1000 - 2000 | : 0,5 s ON / 0,5 s OFF | 0 | 1 | 0 | 1 | 1 |
| 45 | | 2400 - 2850 | : 0,265 s ON / 0,265 s OFF | 0 | 1 | 1 | 0 | 0 |
| 46 | | 2400 - 2850 | : 0,465 s ON / 0,465 s OFF | 0 | 1 | 1 | 0 | 1 |
| 47 | | 640 - 970 | : 0,5 s ON / 0,5 s OFF | 0 | 1 | 1 | 1 | 0 |
| 48 | | 490 - 610 | : 0,25 s ON / 0,25 s OFF | 0 | 1 | 1 | 1 | 1 |
| 49 | | 610 | - | 1 | 0 | 0 | 0 | 0 |
| 50 | | 500 | - | 1 | 0 | 0 | 0 | 1 |
| 51 | | 970 | - | 1 | 0 | 0 | 1 | 0 |
| 52 | | 490 | 0,5 s ON / 1 s OFF | 1 | 0 | 0 | 1 | 1 |
| 53 | | 544 | 0,625 s ON / 0,625 s OFF | 1 | 0 | 1 | 0 | 0 |
| 54 | | 660 | 6,5 s ON / 13 s OFF | 1 | 0 | 1 | 0 | 1 |
| 55 | | 970 | 1 s ON / 1 s OFF | 1 | 0 | 1 | 1 | 0 |
| 56 | | 2850 | 3 x (0,5 s ON / 0,5 s OFF) + 1,5 s OFF | 1 | 0 | 1 | 1 | 1 |
| 57 | | 500 - 1200 | : 3,75 s ON / 0,25 s OFF | 1 | 1 | 0 | 0 | 0 |
| 58 | | 1400 - 1600 | : 1,5 s ON | 1 | 1 | 0 | 0 | 1 |
| 59 | | 800 - 970 | : 1,5 s ON | 1 | 1 | 0 | 1 | 0 |
| 60 | | 1200 - 500 | : 1 s ON | 1 | 1 | 0 | 1 | 1 |
| 61 | | Random | - | 1 | 1 | 1 | 0 | 0 |
| 62 | | 500 - 2500 | : 0,64 s ON | 1 | 1 | 1 | 0 | 1 |
| 63 | | 500 - 2500 | : 0,32 s ON | 1 | 1 | 1 | 1 | 0 |
| 64 | | 554 - 440 | : 0,45 s ON / 0,7 s ON / 0,5 s OFF | 1 | 1 | 1 | 1 | 1 |