> em4 em4 local em4 local

- > Very compact and easy to program nanoPLC
- Save time in designing your application using the most intuitive graphical function block language of the market
- Measure accurately your high end industrial sensors with the embedded configurable analog inputs (including 4-20 mA)
- Integrate easily one of our three high tech designs in your machine
- Adapt your application along the way of its lifecycle thanks to the enhanced controlling performances



em4 local - Glossy black



em4 local - Glossy white Contact us

Specific characteristics		
Part number	88 981 103	88 981 104
Туре	B2	26
Inputs	16 digital inputs (including 4 High Spe and 4 analog 0-	
Outputs	10 digital outputs (including 2 solid states	0.5 A PWM, 2 relays 6 A and 6 relays 8 A)
Supply	24 \	/DC
Finish	Glossy black	Glossy white
On front panel color	Black RAL 9011	White RAL 9003
On terminal block color	Blue RA	AL 5017
Protection rating (in accordance with IEC/EN 60529)	IP 40 on fi IP 20 on ter	
Weight	Without pack With pack	
Dimensions	Without 124.6 x 90 x 60.6 mm / With pa 148 x 103 x 65 mm / 5	4.91 x 3.54 x 2.38 inch

General characteristics	
Products certification	CE, cULus Listed
Conformity with the low voltage directive (in accordance with BT 2006/95/EC)	IEC/EN 61131-2 (Open equipment)
Conformity with the EMC directive (in accordance with 2004/108/EC)	IEC/EN 61000-6-1 (Residential, commercial and light-industrial environments) IEC/EN 61000-6-2 (Industrial) IEC/EN 61000-6-3 (Residential, commercial and light-industrial environments) IEC/EN 61000-6-4 (Industrial)
Earthing	None
Overvoltage category	3 in accordance with IEC/EN 60664-1
Pollution	Degree: 2 in accordance with IEC/EN 61131-2





Maximum utilization altitude	Operation: 2000 m Transport: 3000 m
Mechanical resistance	Immunity to vibrations IEC/EN 60068-2-6, Fc test Immunity to shock IEC/EN 60068-2-27, Ea test
Resistance to electrostatic discharge	Immunity to ESD IEC/EN 61000-4-2, level 3
Resistance to HF interference (Immunity)	Immunity to radiated electrostatic fields IEC/EN 61000-4-3, level 3 Immunity to fast transients (burst immunity) IEC/EN 61000-4-4, level 3 Immunity to shock waves IEC/EN 61000-4-5 Radio frequency in common mode IEC/EN 61000-4-6, level 3
Conducted and radiated emissions (in accordance with EN 55022/11 group 1)	Class B
Operation temperature	-20°C (-4°F) → +60°C (140°F) (+40°C (104°F) in a non-ventilated enclosure)
Storage temperature	-40°C (-40°F) → +80°C (176°F)
Relative humidity	95% max. (no condensation or dripping water)
Screw terminals connection capacity	Flexible wire with ferrule: 1 conductor: 0.2 to 2.5 mm² (AWG 24-14) Flexible wire with ferrule: 2 conductors: 0.2 to 0.75 mm² (AWG 24-18) Rigid wire: 1 conductor: 0.2 to 2.5 mm² (AWG 24-14) Rigid wire: 2 conductors: 0.2 to 0.75 mm² (AWG 24-18) Tightening torque: 0.5 N.m (4.5 lb-in) (tighten using screwdriver diam. 3.5 mm) Stripping length: 6 mm

Processing characteristics	
LCD display	Display with 4 lines of 18 characters
Programming method	FBD (Function Block Diagram), including SFC (Sequential Function Chart, Grafcet)
Program size	Function blocks: typically 1000 blocks Macro blocks: 64 max. (256 blocks per macro)
Program memory	Flash
Removable memory	N.A
Data memory	2 k octets
Backup time (in the event of power failure)	Program and settings in the controller: 10 years Data memory: 10 years
Data backup	Data backup in the flash memory is guaranteed if the product is powered on more than 10 seconds
Cycle time	From 2 ms to 90 ms, default value: 10 ms
Clock data retention	10 years (lithium battery) at 25°C (77°F)
Clock drift	Drift < 12 min/year (at 25°C (77°F)) 6 s / month (at 25°C (77°F) with user-definable correction of drift). Synchronizable by network
Timer block accuracy	0.5 % +/- 2 cycle time
Start up time on power up	< 3 s base alone, < 1.5 s base + 2 expansions + accessory interface (USB or Modbus RS485)
Self test	Test firmware integrity (checksum memory) Stability of the internal power supply Check the conformity of the em4 device configuration with the configuration in the application program.

Supply	
Nominal voltage	24 VDC (-15% / +20%)
Operating limits	20.4 - 28.8 VDC
Immunity from micro power cuts	≤ 1 ms (repetition 20 times)
Max. absorbed power	4W @ 24 VDC, 5.3 W @ 28.8 V, - 0.3 W backlight OFF
Protection against polarity inversions	Yes

Inputs		
Digital and high speed digital inputs 24 VD	C - 4 inputs from I1 to I4	
Input used as digital input		
Input voltage	24 VDC (-15% / +20%)	
Input current	1.8 mA @ 20.4 V 2.1 mA @ 24 V 2.5 mA @ 28.8 V	
Input impedance	11.6 kΩ	
Logic 1 voltage threshold	≥ 15 VDC	
Making current at logic state 1	≥ 1.3 mA	
Logic 0 voltage threshold	≤ 10 VDC	





Response time	Release current at logic state 1	≤ 0.8 mA
Sensor \text{PRP}		
Conforming to IEC/EN 61131-2 Type 1 Input type Residible Isolation between inputs None Protection against polarity inversions Yes Status indicator On LCD screen Cable length 4 100 m Input used as high spood digital input Image: Ima	· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·
Input lype	**	
Solation between power supply and inputs None		**
Protection against polarity inversions Yes		
Salus indicator Cable length		
Cable length ≤ 100 m Input used as high speed digital input Maximum counting frequency 3 channels encoder (11, 12, 13); 20 Ht2*, 2 independent counters (11, 12, 13, 14) (Cumul, IND, DIR); 2 channels: 40 KH2*, 4 channels: 20 kH2*, 2 independent counters (11, 12, 13, 14) (PH, PH2); 2/4 channels: 20 KH2*, 4 independent counters (11, 12, 13, 14) (PJDDown); 1 channels: 60 KH2*, 2 chan		
Imput used as high speed digital input		
Maximum counting frequency 3 shannels encoder (fl. 12, 13): 20 lbt²* 4 channels: 20 lbt²* 2 independent counters (fl. 12) (13, 14) (Cumul, IND, DIR): 2 channels: 40 kHz²* 4 channels: 20 kt²²* 4 channels: 20 kt²²* 4 channels: 20 kt²²* 2 independent counters (fl. 12, 13, 14) (UprDown): 1 channels: 60 kHz²*, 2 channels: 20 kHz²* 4 independent counters (fl. 12, 13, 14) (UprDown): 1 channels: 60 kHz²*, 2 channels: 20 kHz²* 4 with a time cycle <= 10 ms and a ton / toff = 50% +/- 5%, level 0 < 2V and level 1 > 20.4V Other functions 4 chronometers (fl. 12, 13, 14) 4 tachonelers (fl. 12		× 100 III
A tachometers (11, 12, 13, 14) Cable length	1 0 1 0 1	2 independent counters (I1, I2) (I3, I4) (Cumul, IND, DIR): 2 channels: 40 kHz*, 4 channels: 20 kHz*, 2 independent counters (I1, I2) (I3, I4) (PH, PH2): 2/4 channels: 20 kHz* 4 independent counters (I1, I2, I3, I4) (Up/Down): 1 channel: 60 kHz*, 2 channels: 40 kHz*, > 2 channels: 20 kHz* * with a time cycle <= 10 ms and a ton / toff = 50% +/- 5%, level 0 < 2V and level 1 >
Digital 24 VDC and analog inputs 12 bits / 28.8 V - potentiometer - 8 inputs from 15 to IC Input used as digital input Input voltage 24 VDC (-15% / +20%) Input current 1.8 m & 20.4 V 2.1 m & 28.8 V Input impedance 11.6 kΩ Logic 1 voltage threshold ≥ 1 mA Logic 2 voltage threshold ≤ 9 VDC Release current at logic state 1 ≤ 0.7 mA Release current at logic state 1 < 0.7 mA	Other functions	
Input used as digital input 24 VDC (-15% / +20%) Input current 1.8 m ⊗ 2.0.4 V 2.1 m A ⊗ 2.4 V 2.5 m A ⊗ 2.8 V Input impedance 1.1.6 k Ω Logic 1 voltage threshold ≥ 1 m A Logic 1 voltage threshold ≥ 1 m A Logic 2 voltage threshold ≤ 9 VDC Release current at logic state 1 ≤ 0.7 m A Response time 1 to 2 cycle times Sensor type Contact or 3-wire PNP Conforming to IEC/EN 61131-2 Type 1 Input type Resistive Isolation between power supply and inputs None Isolation between inputs None Protection against polarity inversions Yes Status indicator On LCD screen Cable length ≤ 100 m Input typedance 1.16 k Ω Maximum range 0 → 10 V or 0 → V power supply Maximum value without destruction 2.8 VDC max Input type Common mode Resolution 1.2 bit at maximum input voltage (10.5 bit at 10V) Value of LSB 7.03 mV Conversion time Controller cycle time<	Cable length	≤ 3 m with shielded twisted cable
Input voltage	Digital 24 VDC and analog inputs 12 bits / 28.8 V - po	tentiometer - 8 inputs from I5 to IC
Input current	Input used as digital input	
2.1 m k	Input voltage	24 VDC (-15% / +20%)
Logic 1 voltage threshold ≥ 1 mA Making current at logic state 1 ≥ 9 VDC Release current at logic state 1 ≤ 9 VDC Release current at logic state 1 ≤ 0.7 mA Response time 1 to 2 cycle times Sensor type Contact or 3-wire PNP Conforming to IEC/EN 61131-2 Type 1 Input type Resistive Isolation between power supply and inputs None Isolation between inputs None Protection against polarity inversions Yes Status indicator On LCD screen Cable length ≤ 100 m Input used as analog input Measuring range 0 → 10 V or 0 → V power supply Maximum value without destruction 28.8 VDC max Input type Common mode Resolution 12 bit at maximum input voltage (10.5 bit at 10V) Value of LSB 7.03 mV Conversion time Controller cycle time Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (7°F) +/- 1.6 % of full scale at 25°C (7°F) +/- 2.6 % of full scale at 25°C (131°F)	Input current	2.1 mA @ 24 V
Making current at logic state 1 ≥ 1 mA Logic 0 voltage threshold ≤ 9 VDC Release current at logic state 1 ≤ 0.7 mA Response time 1 to 2 cycle times Sensor type Contact or 3-wire PNP Conforming to IEC/EN 61131-2 Type 1 Input type Resistive Isolation between power supply and inputs None Isolation between inputs None Protection against polarity inversions Yes Status indicator On LCD screen Cable length ≤ 100 m Input used as analog input Input used as analog input Measuring range 0 → 10 V or 0 → V power supply Input impedance 11.6 kΩ Maximum value without destruction 28.8 VDC max Input type Common mode Resolution 12 bit at maximum input voltage (10.5 bit at 10V) Value of LSB 7.03 mV Conversion time Controller cycle time Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (7°F) +/- 1.6 % of full scale at 25°C (77°F) +/- 2 % of full scale at 25°C (131°F) <td>Input impedance</td> <td>11.6 kΩ</td>	Input impedance	11.6 kΩ
Logic 0 voltage threshold ≤ 9 VDC Release current at logic state 1 ≤ 0.7 mA Response time 1 to 2 cycle times Sensor type Contact or 3-wire PNP Conforming to IEC/EN 61131-2 Type 1 Input type Resistive Isolation between power supply and inputs None Protection against polarity inversions Yes Status indicator On LCD screen Cable length ≤ 100 m Input used as analog input Measuring range 0 → 10 V or 0 → V power supply Input type Common mode Maximum value without destruction 28.8 VDC max Input type Common mode Resolution 12 bit at maximum input voltage (10.5 bit at 10V) Value of LSB 7.03 mV Conversion time Controller cycle time Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 55°C (131°F) +/- 2.8 % of full scale at 55°C (131°F) Maximum error in 0-V power supply mode +/- 2.9 % of full scale at 55°C (131°F) Repeat accuracy at 55°C (131°F) +/- 0.5 %	Logic 1 voltage threshold	≥ 11 VDC
Release current at logic state 1 ≤ 0.7 mA Response time 1 to 2 cycle times Sensor type Contact or 3-wire PNP Conforming to IEC/EN 61131-2 Type 1 Input type Resistive Isolation between power supply and inputs None Isolation between inputs None Protection against polarity inversions Yes Status indicator On LCD screen Cable length ≤ 100 m Input used as analog input Measuring range 0 → 10 V or 0 → V power supply Input impedance 11.6 kΩ Maximum value without destruction 28.8 VDC max Input type Common mode Resolution 12 bit at maximum input voltage (10.5 bit at 10V) Value of LSB 7.03 mV Conversion time Controller cycle time Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 25°C (713°F) +/- 1.6 % of full scale at 55°C (131°F) Repeat accuracy at 55°C (131°F) +/- 2 % of full scale at 55°C (131°F) Isolation between analog channel and power supply </td <td>Making current at logic state 1</td> <td>≥ 1 mA</td>	Making current at logic state 1	≥ 1 mA
Response time 1 to 2 cycle times Sensor type Contact or 3-wire PNP Conforming to IEC/EN 61131-2 Type 1 Input type Resistive Isolation between power supply and inputs None Isolation between inputs None Protection against polarity inversions Yes Status indicator On LCD screen Cable length ≤ 100 m Input used as analog input Input used as analog input Measuring range 0 → 10 V or 0 → V power supply Input impedance 11.6 kΩ Maximum value without destruction 28.8 VDC max Input type Common mode Resolution 12 bit at maximum input voltage (10.5 bit at 10V) Value of LSB 7.03 mV Conversion time Controller cycle time Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 55°C (131°F) Repeat accuracy at 55°C (131°F) +/- 0.5 % Repeat accuracy at 55°C (131°F) +/- 0.5 % Protection against polarity inversions Yes Protection against polarity	Logic 0 voltage threshold	≤9 VDC
Sensor type Contact or 3-wire PNP Conforming to IEC/EN 61131-2 Type 1 Input type Resistive Isolation between power supply and inputs None Isolation between inputs None Protection against polarity inversions Yes Status indicator On LCD screen Cable length	Release current at logic state 1	≤ 0.7 mA
Conforming to IEC/EN 61131-2 Type 1 Input type Resistive Isolation between power supply and inputs None Isolation between inputs None Protection against polarity inversions Yes Status indicator On LCD screen Cable length ≤ 100 m Input used as analog input Input used as analog input Measuring range 0 → 10 V or 0 → V power supply Input impedance 11.6 kΩ Maximum value without destruction 28.8 VDC max Input type Common mode Resolution 12 bit at maximum input voltage (10.5 bit at 10V) Value of LSB 7.03 mV Conversion time Controller cycle time Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 25°C (131°F) +/- 2 % of full scale at 25°C (131°F) Repeat accuracy at 55°C (131°F) +/- 0.5 % Isolation between analog channel and power supply None Protection against polarity inversions Yes Potentiometer control 2.2 kΩ / 0.5 W (recommended), 10 KΩ max.	Response time	1 to 2 cycle times
Input type Resistive Isolation between power supply and inputs None Isolation between inputs None Protection against polarity inversions Yes Status indicator On LCD screen Cable length < 100 m	Sensor type	Contact or 3-wire PNP
Isolation between power supply and inputs None Protection against polarity inversions Yes Status indicator Cable length * 100 m Input used as analog input Measuring range 0 → 10 V or 0 → V power supply Input impedance 11.6 kΩ Maximum value without destruction 12 bit at maximum input voltage (10.5 bit at 10V) Value of LSB 7.03 mV Conversion time Controller cycle time Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 25°C (131°F) Repeat accuracy at 55°C (131°F) Fotentiometer control Protection against polarity inversions Yes Potentiometer control None None None None 12 bit at maximum input voltage (10.5 bit at 10V) All cale at 25°C (77°F) +/- 1.6 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 55°C (131°F) None Protection against polarity inversions Yes Potentiometer control 2.2 kΩ / 0.5 W (recommended), 10 kΩ max.	Conforming to IEC/EN 61131-2	Type 1
Isolation between inputs None Protection against polarity inversions Yes Status indicator On LCD screen Cable length ≤ 100 m Input used as analog input Measuring range 0 → 10 V or 0 → V power supply Input impedance 11.6 kΩ Maximum value without destruction 28.8 VDC max Input type Common mode Resolution 12 bit at maximum input voltage (10.5 bit at 10V) Value of LSB 7.03 mV Conversion time Controller cycle time Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 55°C (131°F) +/- 2 % of full scale at 25°C (77°F) Repeat accuracy at 55°C (131°F) +/- 0.5 % Isolation between analog channel and power supply None Protection against polarity inversions Yes Potentiometer control 2.2 kΩ / 0.5 W (recommended), 10 KΩ max.		Resistive
Protection against polarity inversions Yes Status indicator On LCD screen Cable length ≤ 100 m Input used as analog input Measuring range 0 → 10 V or 0 → V power supply Input impedance 11.6 kΩ Maximum value without destruction 28.8 VDC max Input type Common mode Resolution 12 bit at maximum input voltage (10.5 bit at 10V) Value of LSB 7.03 mV Conversion time Controller cycle time Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 25°C (131°F) Maximum error in 0-V power supply mode +/- 2 % of full scale at 25°C (131°F) Repeat accuracy at 55°C (131°F) +/- 0.5 % Isolation between analog channel and power supply None Protection against polarity inversions Yes Potentiometer control 2.2 kΩ / 0.5 W (recommended), 10 KΩ max.	Isolation between power supply and inputs	None
Status indicator On LCD screen Cable length ≤ 100 m Input used as analog input Measuring range 0 → 10 V or 0 → V power supply Input impedance 11.6 kΩ Maximum value without destruction 28.8 VDC max Input type Common mode Resolution 12 bit at maximum input voltage (10.5 bit at 10V) Value of LSB 7.03 mV Conversion time Controller cycle time Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 25°C (73°F) +/- 2 % of full scale at 25°C (77°F) +/- 2 % of full scale at 55°C (131°F) +/- 0.5 % Isolation between analog channel and power supply None Protection against polarity inversions Yes Potentiometer control 2.2 kΩ / 0.5 W (recommended), 10 KΩ max.	Isolation between inputs	None
Cable length ≤ 100 m Input used as analog input Measuring range 0 → 10 V or 0 → V power supply Input impedance 11.6 kΩ Maximum value without destruction 28.8 VDC max Input type Common mode Resolution 12 bit at maximum input voltage (10.5 bit at 10V) Value of LSB 7.03 mV Conversion time Controller cycle time Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 25°C (131°F) +/- 2 % of full scale at 25°C (77°F) Maximum error in 0-V power supply mode +/- 2 % of full scale at 25°C (131°F) Repeat accuracy at 55°C (131°F) +/- 0.5 % Isolation between analog channel and power supply None Protection against polarity inversions Yes Potentiometer control 2.2 kΩ / 0.5 W (recommended), 10 kΩ max.	Protection against polarity inversions	Yes
Input used as analog input Measuring range 0 → 10 V or 0 → V power supply Input impedance 11.6 kΩ Maximum value without destruction 28.8 VDC max Input type Common mode Resolution 12 bit at maximum input voltage (10.5 bit at 10V) Value of LSB 7.03 mV Conversion time Controller cycle time Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 55°C (131°F) Maximum error in 0-V power supply mode +/- 2 % of full scale at 25°C (77°F) +/- 3 % of full scale at 55°C (131°F) +/- 0.5 % Isolation between analog channel and power supply None Protection against polarity inversions Yes Potentiometer control 2.2 kΩ / 0.5 W (recommended), 10 KΩ max.	Status indicator	On LCD screen
Measuring range 0 → 10 V or 0 → V power supply Input impedance 11.6 kΩ Maximum value without destruction 28.8 VDC max Input type Common mode Resolution 12 bit at maximum input voltage (10.5 bit at 10V) Value of LSB 7.03 mV Conversion time Controller cycle time Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 55°C (131°F) Maximum error in 0-V power supply mode +/- 2 % of full scale at 55°C (131°F) Repeat accuracy at 55°C (131°F) +/- 0.5 % Isolation between analog channel and power supply None Protection against polarity inversions Yes Potentiometer control 2.2 kΩ / 0.5 W (recommended), 10 KΩ max.	Cable length	≤ 100 m
Input impedance11.6 kΩMaximum value without destruction28.8 VDC maxInput typeCommon modeResolution12 bit at maximum input voltage (10.5 bit at 10V)Value of LSB7.03 mVConversion timeController cycle timeMaximum error in 0-10V mode $+/-$ 1.1 % of full scale at 25°C (77°F) $+/-$ 1.6 % of full scale at 55°C (131°F)Maximum error in 0-V power supply mode $+/-$ 2 % of full scale at 25°C (77°F) $+/-$ 3 % of full scale at 55°C (131°F)Repeat accuracy at 55°C (131°F) $+/-$ 0.5 %Isolation between analog channel and power supplyNoneProtection against polarity inversionsYesPotentiometer control2.2 kΩ / 0.5 W (recommended), 10 KΩ max.	Input used as analog input	
Input impedance11.6 kΩMaximum value without destruction28.8 VDC maxInput typeCommon modeResolution12 bit at maximum input voltage (10.5 bit at 10V)Value of LSB7.03 mVConversion timeController cycle timeMaximum error in 0-10V mode $+/-$ 1.1 % of full scale at 25°C (77°F) $+/-$ 1.6 % of full scale at 55°C (131°F)Maximum error in 0-V power supply mode $+/-$ 2 % of full scale at 25°C (77°F) $+/-$ 3 % of full scale at 55°C (131°F)Repeat accuracy at 55°C (131°F) $+/-$ 0.5 %Isolation between analog channel and power supplyNoneProtection against polarity inversionsYesPotentiometer control2.2 kΩ / 0.5 W (recommended), 10 KΩ max.	Measuring range	0 → 10 V or 0 → V power supply
Maximum value without destruction28.8 VDC maxInput typeCommon modeResolution12 bit at maximum input voltage (10.5 bit at 10V)Value of LSB7.03 mVConversion timeController cycle timeMaximum error in 0-10V mode+/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 55°C (131°F)Maximum error in 0-V power supply mode+/- 2 % of full scale at 25°C (77°F) +/- 3 % of full scale at 55°C (131°F)Repeat accuracy at 55°C (131°F)+/- 0.5 %Isolation between analog channel and power supplyNoneProtection against polarity inversionsYesPotentiometer control2.2 kΩ / 0.5 W (recommended), 10 KΩ max.		
Input typeCommon modeResolution12 bit at maximum input voltage (10.5 bit at 10V)Value of LSB7.03 mVConversion timeController cycle timeMaximum error in 0-10V mode+/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 55°C (131°F)Maximum error in 0-V power supply mode+/- 2 % of full scale at 25°C (77°F) +/- 3 % of full scale at 55°C (131°F)Repeat accuracy at 55°C (131°F)+/- 0.5 %Isolation between analog channel and power supplyNoneProtection against polarity inversionsYesPotentiometer control2.2 kΩ / 0.5 W (recommended), 10 KΩ max.	_ : _ : _ :	
Resolution 12 bit at maximum input voltage (10.5 bit at 10V) Value of LSB 7.03 mV Conversion time Controller cycle time Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 55°C (131°F) Maximum error in 0-V power supply mode +/- 2 % of full scale at 25°C (77°F) +/- 3 % of full scale at 55°C (131°F) Repeat accuracy at 55°C (131°F) +/- 0.5 % Isolation between analog channel and power supply None Protection against polarity inversions Yes Potentiometer control 2.2 kΩ / 0.5 W (recommended), 10 KΩ max.		
Value of LSB 7.03 mV Conversion time Controller cycle time Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 55°C (131°F) Maximum error in 0-V power supply mode +/- 2 % of full scale at 25°C (77°F) +/- 3 % of full scale at 55°C (131°F) +/- 0.5 % Repeat accuracy at 55°C (131°F) +/- 0.5 % Isolation between analog channel and power supply None Protection against polarity inversions Yes Potentiometer control 2.2 kΩ / 0.5 W (recommended), 10 KΩ max.		
Conversion time Controller cycle time Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 55°C (131°F) Maximum error in 0-V power supply mode +/- 2 % of full scale at 25°C (77°F) +/- 3 % of full scale at 55°C (131°F) Repeat accuracy at 55°C (131°F) +/- 0.5 % Isolation between analog channel and power supply None Protection against polarity inversions Yes Potentiometer control 2.2 kΩ / 0.5 W (recommended), 10 KΩ max.		,
Maximum error in 0-10V mode +/- 1.1 % of full scale at 25°C (77°F) +/- 1.6 % of full scale at 55°C (131°F) Maximum error in 0-V power supply mode +/- 2 % of full scale at 25°C (77°F) +/- 3 % of full scale at 25°C (131°F) Repeat accuracy at 55°C (131°F) +/- 0.5 % Isolation between analog channel and power supply None Protection against polarity inversions Yes Potentiometer control 2.2 kΩ / 0.5 W (recommended), 10 KΩ max.		
+/- 1.6 % of full scale at 55°C (131°F) Maximum error in 0-V power supply mode +/- 2 % of full scale at 25°C (77°F) +/- 3 % of full scale at 55°C (131°F) +/- 0.5 % Repeat accuracy at 55°C (131°F) +/- 0.5 % Isolation between analog channel and power supply None Protection against polarity inversions Yes Potentiometer control 2.2 kΩ / 0.5 W (recommended), 10 KΩ max.		
+/- 3 % of full scale at 55°C (131°F) Repeat accuracy at 55°C (131°F) Isolation between analog channel and power supply Protection against polarity inversions Yes Potentiometer control 2.2 kΩ / 0.5 W (recommended), 10 KΩ max.		+/- 1.6 % of full scale at 55°C (131°F)
Isolation between analog channel and power supply None Protection against polarity inversions Yes Potentiometer control $2.2 \text{ kΩ} / 0.5 \text{ W}$ (recommended), 10 KΩ max.	Maximum error in 0-V power supply mode	,
Protection against polarity inversions Yes Potentiometer control 2.2 k Ω / 0.5 W (recommended), 10 K Ω max.	Repeat accuracy at 55°C (131°F)	+/- 0.5 %
Potentiometer control 2.2 k Ω / 0.5 W (recommended), 10 K Ω max.	Isolation between analog channel and power supply	None
	Protection against polarity inversions	Yes
	Potentiometer control	$2.2~\text{k}\Omega$ / $0.5~\text{W}$ (recommended), $10~\text{K}\Omega$ max.
	Cable length	≤ 10 m with shielded twisted cable (sensor not isolated)





Input used as digital input (power off state)	
Input voltage	24 VDC (-15% / +20%)
Input current	1.5 mA @ 20.4 V
	1.7 mA @ 24 V
	2.1 mA @ 28.8 V
Input impedance	13.9 kΩ
Logic 1 voltage threshold	≥ 11 VDC
Making current at logic state 1	≥ 0.8 mA
Logic 0 voltage threshold	≤8 VDC
Release current at logic state 1	≤ 0.5 mA
Response time	1 to 2 cycle times
Sensor type	Contact or 3-wire PNP
Conforming to IEC/EN 61131-2	Type 1
Input type	Resistive
Isolation between power supply and inputs	None
solation between inputs	None
Protection against polarity inversions	No
Status indicator	On LCD screen
Cable length	≤ 100 m
nput used as 0-10 V analog input	
Measuring range	0 → 10 V
nput impedance	13.9 kΩ
Maximum value without destruction	28.8 VDC max
nput type	Common mode
Resolution	12 bit / 10V
/alue of LSB	2.45 mV
Conversion time	Controller cycle time
Maximum error at 25°C (77°F)	+/- 0.8 % of full scale
Maximum error at 55°C (131°F)	+/- 1.2 % of full scale
Repeat accuracy at 55°C (131°F)	+/- 0.5 %
solation between analog channel and power supply	None
Protection against polarity inversions	Yes for voltage ≤ 10 V
Potentiometer control	$2.2~k\Omega$ / $0.5~W$ (recommended), $10~K\Omega$ max.
Cable length	≤ 10 m with shielded twisted cable (sensor not isolated)
nput used as 0-20 mA analog input	
Measuring range	$0 \rightarrow 20 \text{ mA} (4 \rightarrow 20 \text{ mA by the application})$
nput impedance	245 Ω
Maximum value without destruction	30 mA max
nput type	Common mode
Resolution	11 bit (normalized at 0 - 2000) / 20 mA
Value of LSB	10 μΑ
Conversion time	Controller cycle time
Maximum error at 25°C (77°F)	+/- 1.2 % of full scale
Maximum error at 55°C (131°F)	+/- 1.7 % of full scale
Repeat accuracy at 55°C (131°F)	+/- 0.5 %
solation between analog channel and power supply	None
Protection against polarity inversions	Yes
Overvoltage protection	Yes If the input voltage is > 7 V, this one is automatically switched on 0-10V configuration
<u> </u>	
Cable length	≤ 30 m with shielded twisted cable (sensor not isolated)





Outputs				
Digital / PWM solid state output - 2 solid state outputs t	from O1 to O2			
Output used as digital output				
Breaking voltage	10 → 28.8 VDC			
Nominal voltage	12 / 24 VDC			
Nominal current	0.5 A on resistive load @ 2	25°C (77°F)		
Max. breaking current	0.625 A			
Non repetitive overload current	1 A			
Maximum breaking current in the common	1 A			
Voltage drop	< 1 V for I = 0.5 A			
Response time	Make = 1 cycle time + 30 µ Release = 1 cycle time + 4			
Built-in protections	Against overloads and sho Against over voltages (*): \(^1\) Against inversions of powe (*) In the absence of a pote logic controller and the load	res r supply: Yes ential free contact l	between the output of th	e programmable
Min. load	1 mA			
Galvanic isolation	No			
Cable length	≤ 10 m			
Truth table of the default		Command	Output	Fault
	Normal condition	0	0	No
		1	1	No
	Overheating	0	0	No
		1	0	Yes
	Underpowered	0	0	X
		1	0	X
	Short circuit (current limit)	0	0	No
		1	0	Yes
Output used as PWM output				
PWM frequency	14.11 Hz ; 56.45 Hz ; 112.9	90 Hz ; 225.80 Hz	; 451.59 Hz ; 1758.24 H	Z
PWM cyclic ratio	0 → 100 % 100 steps			
PWM Max. error	≤ 2 % (from 10 % → 90 %))		
Status indicator	On LCD screen			
Cable length	≤ 10 m with shielded twister	ed cable		
Distance between the power source and the static outputs	≤ 30 m			
6 A relay output - 2 outputs from O3 to O4				
Breaking voltage	250 VAC max			
Breaking current	6 A			
Maximum breaking current in the common	IEC @ 25°C (77°F): 12 A IEC @ 60°C (140°F) or UL	.: 10 A		
Mechanical life	5 000 000 operations (cycl	es)		
Electrical durability for 50 000 operating cycles	24 VDC tau = 0 ms: 6 A, ta Usage category DC-12: 24 Usage category DC-14: 24 250 VAC cos phi = 1: 6 A, u Usage category AC-12: 25 Usage category AC-13: 25 Usage category AC-15: 25	V, 6 A V, 1.8 A cos phi = 0.7: 5 A, 0 V, 6 A 0 V, 5 A		
Minimum switching capacity	100 mA (at minimum voltag			
Maximum operating rate	Off load: 10 Hz At operating current: 0.1 H	Z		
Voltage for withstanding shocks	In accordance with IEC/EN	60947-1 and IEC	/EN 60664-1: 4 kV	
Response time	Make = 1 cycle time + 8 m Release = 1 cycle time + 4	, .		
Built-in protections	Against short-circuits: Non- Against over voltages and			
Status indicator	On LCD screen			
Cable length	≤ 30 m			







8 A relay output - 6 outputs from O5 to OA	
Breaking voltage	250 VAC max
Breaking current	8 A, ≥ 55°C: 6 A
Maximum breaking current in the common	IEC @ 25°C (77°F): C3, C6: 8 A ; C4, C5: 16 A IEC @ 60°C (140°F) or UL: C3, C6: 8 A ; C4, C5: 10 A
Mechanical life	20 000 000 operations (cycles)
Electrical durability for 50 000 operating cycles	24 VDC tau = 0 ms: 8 A, tau = 7 ms: 3 A, tau = 15 ms: 1.5 A Usage category DC-12: 24 V, 8 A Usage category DC-14: 24 V, 1.5 A 250 VAC cos phi = 1: 8 A, cos phi = 0.7: 4.75 A, cos phi = 0.4: 3 A Usage category AC-12: 250 V, 8 A Usage category AC-13: 250 V, 4.3 A Usage category AC-15: 250 V, 1.5 A
Minimum switching capacity	100 mA (at minimum voltage of 12V)
Maximum operating rate	Off load: 10 Hz At operating current: 0.1 Hz
Voltage for withstanding shocks	In accordance with IEC/EN 60947-1 and IEC/EN 60664-1: 4 kV
Response time	Make = 1 cycle time + 10 ms typical Release = 1 cycle time + 5 ms typical
Built-in protections	Against short-circuits: None Against over voltages and overload: None
Status indicator	On LCD screen
Cable length	≤ 30 m


Schemes


B26 Glossy






Inputs



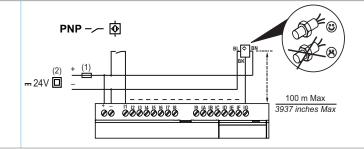






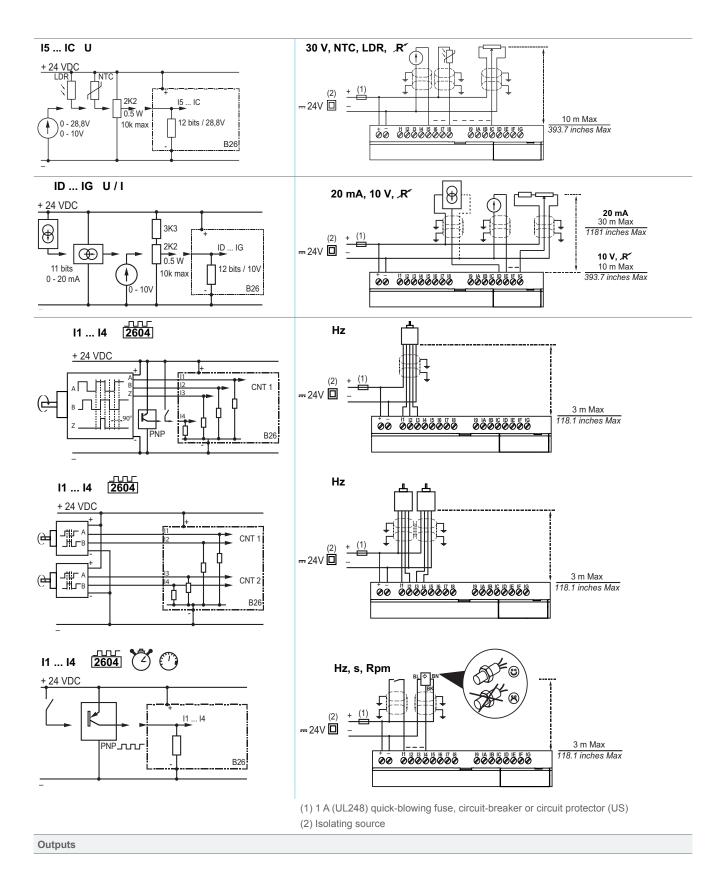





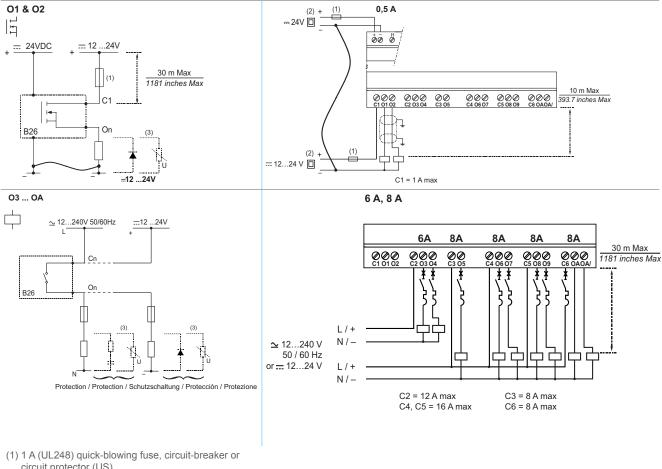

- circuit protector (US)
- (2) Isolating source
- (3) Inductive load

