

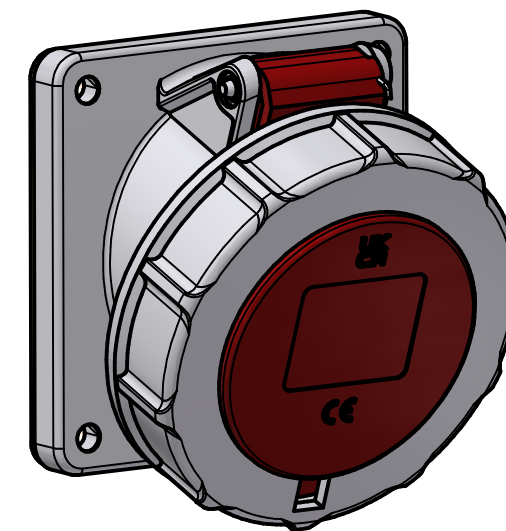
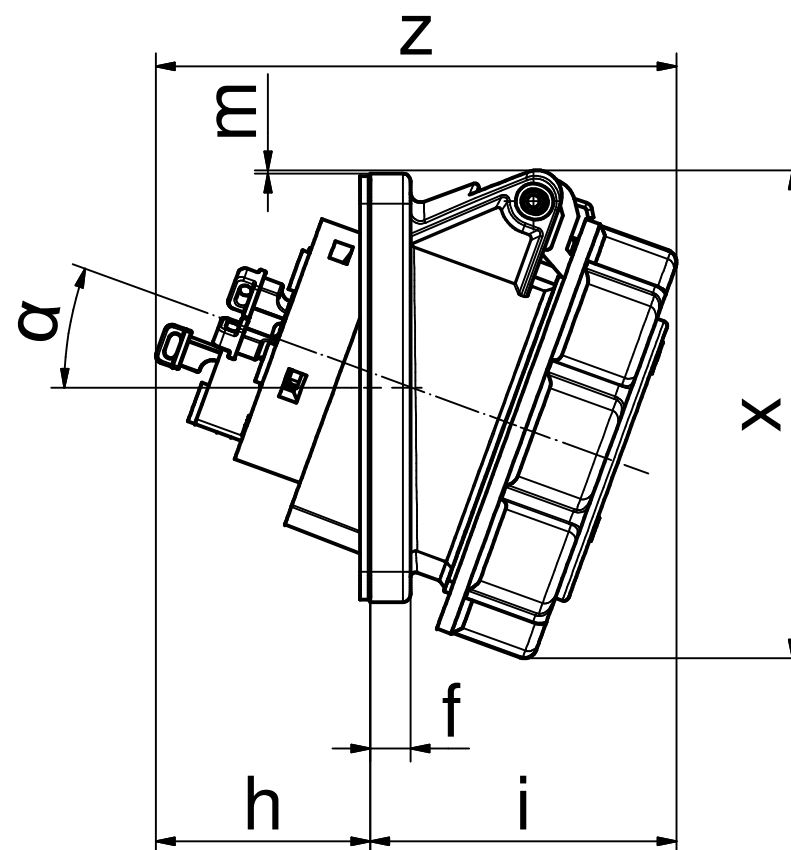


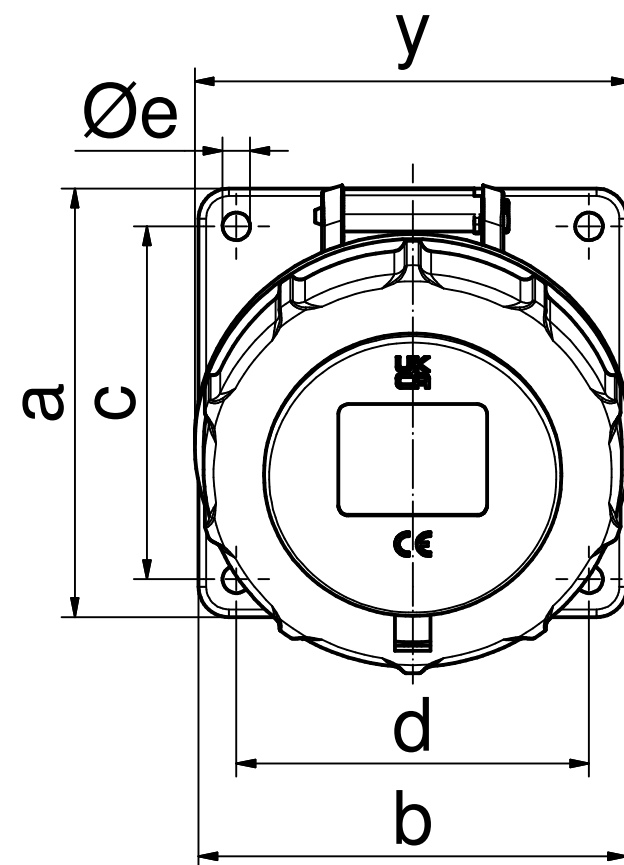

Einbauöffnung

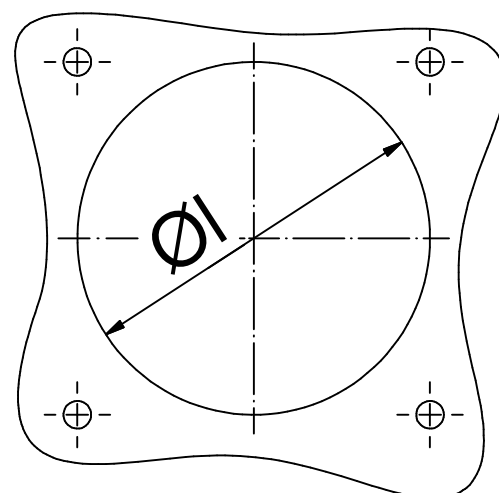

	16A 3pol.	16A 4pol.	16A 5pol.	32A 3/4pol.	32A 5pol.
a	85	85	85	85	85
b	85	85	85	85	85
c	70	70	70	70	70
d	70	70	70	70	70
Øe	5,5	5,5	5,5	5,5	5,5
f	8	8	8	8	8
h	43	44	43	53	53
i	57	58	61	68	69
Øl	57	70	70	78	78
m	-	-	1	1	7,5
x	90	92	97	102	112
y	85	85	86,5	94	101,5
z	100	102	104	121	122
α	20°	20°	20°	20°	20°
Leiter mm ² min.	1,5	1,5	1,5	2,5	2,5
Leiter mm ² max.	4	4	4	10	10

Revisionsnummer: C				Bals Elektrotechnik GmbH & Co. KG Burgweg 22 57399 Kirchhundem www.bals.com		Werkstoff		Oberfläche	
9				Datum		Name		QC ANbausteckdose 16A 3pol. - 32A 5pol. IP67 IQ schräg 85x5	
8				Gezeichnet: 01.12.22		MAßmann		Freim. Toler.	
7				Geprüft:				Maßstab	
6				Tel/Phone: +49 2723 771-184				Ers.f.Zg.gl.Nr.v.	
5				Email: Marius.Assmann@Bals.com				Wz.Auftr.-Nr.	
4				Dateiname: 4MB505.idw					
3				Werkzeug-Nr.:					
2	37/26	16.04.26	MAßm	Zg.-Nummer: 4MB505					
1	35/24	30.09.24	MAßm	Typ-Nummer:					
Ausgabe	Änderung	Datum	Name						

Technische Änderungen vorbehalten