




Simplified LCA - VigiPacT RHB with accessories

The Functional Unit of VigiPacT RHB is a B-Type RCD that measures the earth-leakage current in an electrical installation via its associated toroid. Protection relays control the power supply interruption to the monitored systems during 10 years. It can be set to between 30 mA and 3 A.

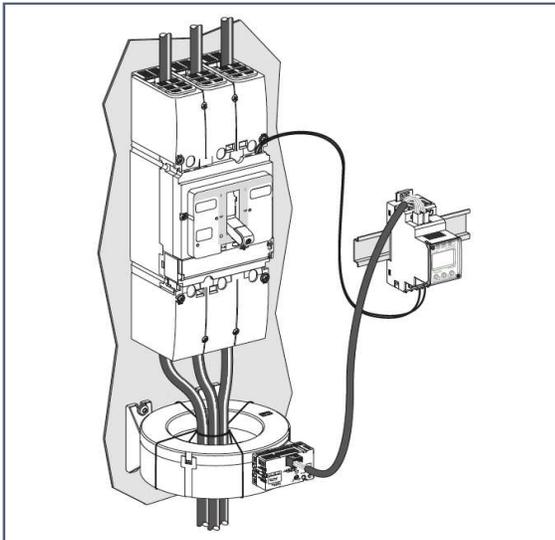

248.3800 kg of CO₂eq
Global warming*



4.64E-02 kg of Sbeq
Depletion of abiotic resources*




4,795.1 MJ
Total use of primary energy*

*Results extracted from a simplified life cycle analysis model, aligned with ISO 14040-44 principles - DO NOT COMPLY with ISO 14 025. The results are not comparable with any other assessment

Additional information

VigiPacT to become a complete range of protection and monitoring devices. VigiPacT residual current relays, with associated toroids, measure the earth leakage current in the electrical installation to provide earth leakage protection and earth leakage monitoring. VigiPacT residual current devices (RCDs) with appropriate settings provide effective protection of life and property. The characteristics of the relay/toroid combination ensure reliable measurements. VigiPacT relays continuously monitor the power supply, relay/toroid link and internal electronics. Failure of the detection circuit is signalled and may be used to trip the circuit breaker. The LEDs on the front panel can also be used to check operation at any time.

Reference product mass 1.723 kg without Packaging

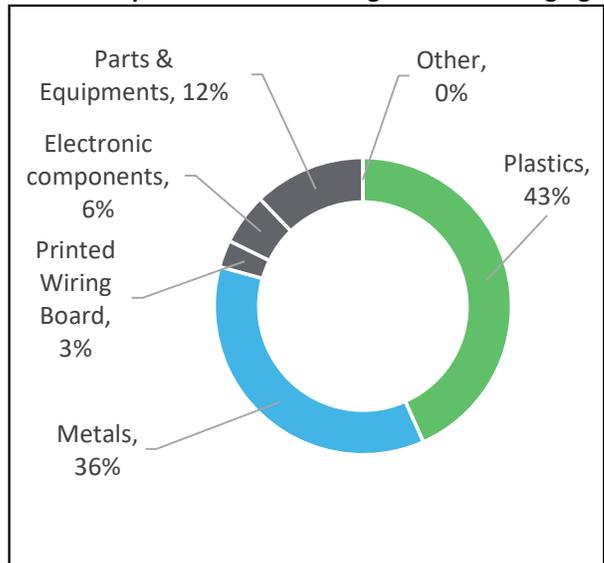

Schneider Electric Industries SAS
Country Customer Care Center <http://www.se.com/contact>
35 rue Joseph Mounier
CS30323
F-92506 Rueil Malmaison Cedex
RCS Nanterre 954 504 439 Capital social 896 313 776€

Published by Schneider Electric
© 2019 - Schneider Electric – All rights reserved