HDMI Video Wall Processor

Quick Start Guide



What's included



Main Unit




Adapter




Remote Control

Ports and Interfaces

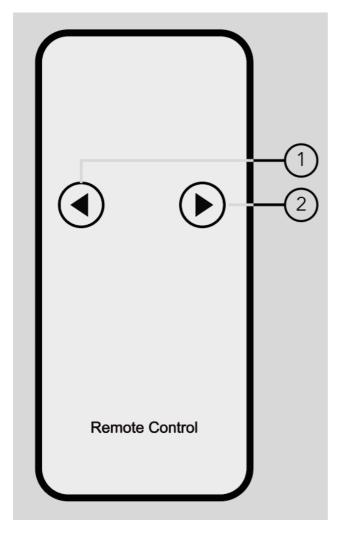

- 1. Tress the button to select the previous mode
- 2. Press the button to select the next mode

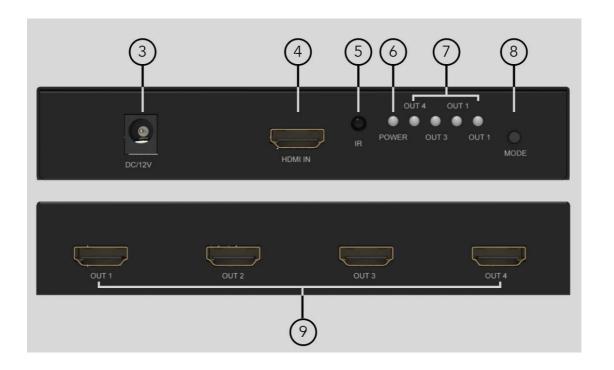


3. DC/12V: DC 12V Input4. HDMI IN: HDMI Input port

5. IR: IR Receiver Port6. POWER: Power LED

7. OUT 1-4: HDMI Output 1-4 LED Indicators


8. MODE: Video Wall Mode Selector9. OUT 1-4: HDMI Output 1-4 Port

Mode Description

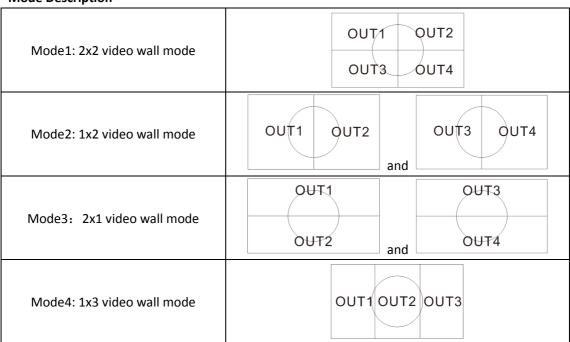

Mode5: 3x1 video wall mode	O⊎T1 OUT2 O⊎T3
Mode6: 1x4 video wall mode	OUT1 OUT2 OUT3 OUT4
Mode7: 4x1 video wall mode	OUT1 OUT2 OUT3 OUT4
Mode8: 1x4 Splitter mode	OUT1 OUT2 OUT3 OUT4

Connection Diagram

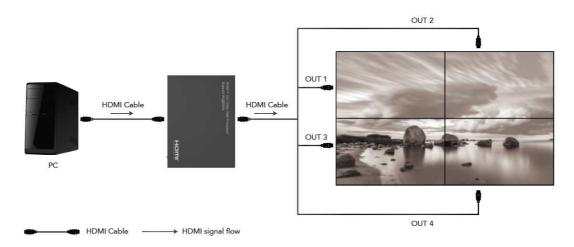

Introduction

The HDMI™ 2x2 Video Wall Processor lets you share a single HDMI source image to 4 TV panel displays in a 2 by 2 Video Wall configuration for large-screen presentation. It provides high-quality image scaling, easy operation controls and adjustable bezel compensation, which are all essential for the video wall system to perform smoothly as envisioned. This video wall system is a cost-effective screen controller solution for multiple LCD screens stacked up together and creating one supers-size screen for display. Your image screen is limitless as your imagination goes. See your multimedia content displayed bold, bright, and big for advertising, entertainment and information display. Customers can combine 2,3 or 4 flat panel LCD TVs into one larger display for a 2x2, 1x2, 1x3 or 1x4 screen through the help of this HDMI video wall controller processor.

Features

- * Support one HDMI input resolution up to 4K@60Hz YUV 4:4:4
- * Support four HDMI outputs resolution fixed to 1080p@60Hz
- * Support various display modes selectable via front button and remote control to combine up to
- 4 flat panel LCD TVs into one larger display
- * Support on screen display (OSD) function for mode and port information
- * Support power-off memory function to keep the last setup status when power on

Specification

Input Ports	HDMI x 1
Output Ports	HDMI x 4
Vertical Frequency Range	50/60Hz
Video Amplifier Bandwidth	6.0Gbps/600MHz per channel(18Gbps all channels)
Interlaced(50&60Hz)	480i,576i,1080i
Progressive(50&60Hz)	480p,576p,720p,1080p,4K@24/25/30Hz,4k@50/60Hz
Limited Warranty	1 Year Parts and Labor
Operating Temperature	0°C to 70°C
Storage Humidity	5% to 90% RH non-condensation
Power Supply	12V DC
Power Consumption (Max)	12W
Processor Unit Cert	FCC, CE, RoHS
Power Supply Cert	FCC, CE, RoHS
Power Adapter Standard	US, EU, UK, AU Standard etc.
Dimension(LxWxH)	151x111x26.5mm
Net Weight	395g
Material	Metal
User Manual	English Version

Troubleshooting

Problems	Causes	Solutions
Power light is off	Is the power adapter properly	Please check if the power adapter
and product is not	connected and the power on/off button	is connected properly and switch
working	is on	on the power on/off button
The product doesn't	Maybe the customers setup the wrong	Please change the resolution to
show the right	output signal formats that the	the SDR resolution like
image of the Apple	processor can't support, such as	4K@60Hz RGB or 4:4:4, and

TV 4K or other	HDR10 (4K@60Hz 4:2:0) and Dolby	down compatible with the lower
players	Vision (4K@60Hz 4:2:2), etc.	SDR resolutions
No picture and	Maybe the products can't recognize	Please check the connection of
sounds after re-plug correctly signal of the input and		the HDMI cables and power
the HDMI cables or	outputs after the actions, or the	cable, and re-connect the HDMI
power cable connection of the HDMI cables are		cables and have a try, or change a
	not very well	high quality HDMI cables

Dolby is a trademark of Dolby Laboratories.

The terms HDMITM and HDMI High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

Other trademarks or trade names mentioned herein refer to the organizations or their products that own the trademarks or names. We do not own the related rights of trademarks and product names of other organizations.