

Sense Driver



Sense Driver Blanc 3000lm 25W 700mA DALI / Push Dim

Codes-articles: 820083
EAN: 7021988200834



Électrique
Wattage: 25W
System wattage: 25W
Tension: 220-240V
Nombre maximal de luminaires par disjoncteur: B10: 31, B16: 50, C10: 53, C16: 85

Source lumineuse
Durée de vie: 100,000

Contrôle/Dimming
Type: DALI / Push Dim
Alimentation: 700mA

Protection
Classe Isolation: Classe II

Énergie et approbations
Breem: Conforme Hea 01 pour un éclairage sans scintillement
BVB: Oui

Matériaux et finition
Embase: Plastique
Couleur: Blanc


Montage/Connexion
Montage: Encastré, Intérieur
Connexion: Linect 5 pôles / bornier sans vis

Dimensions
Longueur (mm) L: 124
Largeur (mm) W: 79
Hauteur (mm) H: 22
Poids (kg) brutto/netto: 0.262 / 0.218

Emballage
Dimensions de l'emballage (mm): 310 x 35 x 100



SENSE 700mA /3000lm DRIVER DALI

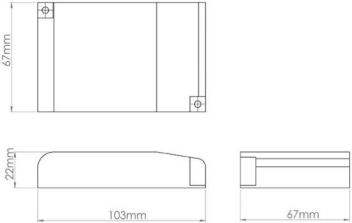

Sense Panels & Driver Kits									
	CRI (Ra)	LEDs (Steps)	BA (°)	SENSE 3000lm DRIVER KIT PHASE DIM (700mA)	SENSE 4000lm DRIVER KIT NON DIM (1400mA)	SENSE 5000lm DRIVER KIT NON DIM (1400mA)	SENSE 3000lm DRIVER KIT DALI (700mA)	SENSE 4000lm DRIVER KIT DALI (1400mA)	SENSE 5000lm DRIVER KIT DALI (1400mA)
SENSE OPAL 3-4000lm LED 3000K	80	5	110	2750lm UGR<22 21W/128lm/W	4000lm UGR<22 31.5W/127lm/W	x	2750lm UGR<22 21W/128lm/W	4000lm UGR<22 31.5W/127lm/W	x
SENSE OPAL 3-4000lm LED 4000K	80	5	110	2650lm UGR<22 21W/124lm/W	3900lm UGR<22 31.5W/124lm/W	x	2650lm UGR<22 21W/124lm/W	3900lm UGR<22 31.5W/124lm/W	x
SENSE OPAL 3000lm LED 3000K	80	5	110	2750lm UGR<22 21W/128lm/W	4000lm UGR<22 31.5W/127lm/W	x	2750lm UGR<22 21W/128lm/W	4000lm UGR<22 31.5W/127lm/W	x
SENSE OPAL 3000lm LED 4000K	80	5	110	2650lm UGR<22 21W/124lm/W	3900lm UGR<22 31.5W/124lm/W	x	2650lm UGR<22 21W/124lm/W	3900lm UGR<22 31.5W/124lm/W	x
SENSE PRISM 3-4000lm LED 3000K	80	5	90	2650lm UGR<17 21W/124lm/W	3900lm UGR<19 31.5W/123lm/W	x	2650lm UGR<17 21W/124lm/W	3900lm UGR<19 31.5W/123lm/W	x
SENSE PRISM 3-4000lm LED 4000K	80	5	90	2750lm UGR<17 21W/133lm/W	4000lm UGR<19 31.5W/129lm/W	x	2750lm UGR<17 21W/133lm/W	4000lm UGR<19 31.5W/129lm/W	x
SENSE PRISM 10000lm LED 3000K	80	5	90	2650lm UGR<17 21W/124lm/W	3900lm UGR<17 31.5W/118lm/W	42W/110lm/W	2650lm UGR<17 21W/124lm/W	3900lm UGR<17 31.5W/118lm/W	42W/110lm/W
SENSE PRISM 10000lm LED 4000K	80	5	90	2750lm UGR<17 21W/133lm/W	4000lm UGR<17 31.5W/118lm/W	42W/110lm/W	2750lm UGR<17 21W/133lm/W	4000lm UGR<17 31.5W/118lm/W	42W/110lm/W

Notes: efficiency calculations are incl. driver
incl. driver: 7-14% loss depending on driver

l



7 0 2 1 9 8 8 2 0 0 8 3 4