

# DBS60E-BEEZD0S38

DBS60

**INCREMENTAL ENCODERS** 





## Ordering information

Туре	Part no.
DBS60E-BEEZD0S38	1079806

Other models and accessories → www.sick.com/DBS60

Illustration may differ



#### Detailed technical data

#### **Features**

Special device	✓
Specialty	Cable 8-wire 1.0 m, universal with male connector M12 (finecable male connector MB12MWSAFF08ST-A)
Standard reference device	DBS60E-BEEK01024, 1072718

#### Performance

Pulses per revolution	1,024
Measuring step	≤ 90°, electric/pulses per revolution
Measuring step deviation	± 18° / pulses per revolution
Error limits	Measuring step deviation x 3
Duty cycle	≤ 0.5 ± 5 %

#### Interfaces

mediadoc	
Communication interface	Incremental
Communication Interface detail	HTL / Push pull
Number of signal channels	6-channel
Initialization time	< 5 ms <sup>1)</sup>
Output frequency	+ 300 kHz <sup>2)</sup>
Load current	≤ 30 mA, per channel
Power consumption	≤ 1 W (without load)

 $<sup>^{1)}</sup>$  Valid signals can be read once this time has elapsed.

#### Electrical data

Connection type	Cable, 8-wire, with male connector, M12, 8-pin, universal, 1 m, finecable male connector MB12MWSAFF08ST-A $^{1)}$
Supply voltage	10 27 V
Reference signal, number	1

<sup>1)</sup> The universal cable connection is positioned so that it is possible to lay it without bends in a radial or axial direction.

 $<sup>^{2)}</sup>$  Up to 450 kHz on request.

 $<sup>^{2)}\,\</sup>mbox{Short-circuit opposite}$  to another channel, US or GND permissable for maximum 30 s.

<sup>3)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40 °C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

Reference signal, position	90°, electric, logically gated with A and B		
Reverse polarity protection	<b>√</b>		
Short-circuit protection of the outputs	<b>✓</b> <sup>2)</sup>		
MTTFd: mean time to dangerous failure	500 years (EN ISO 13849-1) <sup>3)</sup>		

<sup>1)</sup> The universal cable connection is positioned so that it is possible to lay it without bends in a radial or axial direction.

#### Mechanical data

Mechanical design	Blind hollow shaft		
Shaft diameter	12 mm		
Flange type / stator coupling	1-sided stator coupling, slot, screw hole circle radius 31.5–48.5 mm		
Weight	+ 0.25 kg <sup>1)</sup>		
Shaft material	Stainless steel		
Flange material	Aluminum		
Housing material	Aluminum		
Material, cable	PVC		
Start up torque	+ 0.5 Ncm (+20 °C)		
Operating torque	0.4 Ncm (+20 °C)		
Permissible movement static	$\pm$ 0.3 mm (radial) $\pm$ 0.5 mm (axial) <sup>2)</sup>		
Permissible movement dynamic	$\pm$ 0.1 mm (radial) $\pm$ 0.2 mm (axial) <sup>2)</sup>		
Operating speed	6,000 min <sup>-1 3)</sup>		
Maximum operating speed	9,000 min <sup>-1 4)</sup>		
Moment of inertia of the rotor	50 gcm <sup>2</sup>		
Bearing lifetime	3.6 x 10 <sup>9</sup> revolutions		
Angular acceleration	≤ 500,000 rad/s²		

 $<sup>^{1)}</sup>$  Based on encoder with male connector or cable with male connector.

#### Ambient data

EMC	According to EN 61000-6-2 and EN 61000-6-3
Enclosure rating	IP67, housing side (IEC 60529) <sup>1)</sup> IP65, shaft side (IEC 60529)
Permissible relative humidity	90 % (Condensation not permitted)
Operating temperature range	-20 °C +85 °C <sup>2)</sup>
Storage temperature range	-40 °C +100 °C, without package

<sup>1)</sup> With mating connector fitted

 $<sup>^{2)}\,\</sup>mbox{Short-circuit}$  opposite to another channel, US or GND permissable for maximum 30 s.

<sup>3)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40°C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

 $<sup>^{2)}</sup>$  Not apllicable for stator coupling type C and K.

 $<sup>^{</sup>m 3)}$  Allow for self-heating of 2.6 K per 1,000 rpm when designing the operating temperature range.

<sup>&</sup>lt;sup>4)</sup> Maximum speed which does not cause mechanical damage to the encoder. Impact on the service life and signal quality is possible. Please note the maximum output frequency.

<sup>&</sup>lt;sup>2)</sup> These values relate to all mechanical versions including recommended accessories unless otherwise noted.


Resistance to shocks	250 g, 3 ms (EN 60068-2-27)	
Resistance to vibration	30 g, 10 Hz 2,000 Hz (EN 60068-2-6)	

 $<sup>^{1)}</sup>$  With mating connector fitted.

### Classifications

eCl@ss 5.0	27270501
eCl@ss 5.1.4	27270501
eCl@ss 6.0	27270590
eCl@ss 6.2	27270590
eCl@ss 7.0	27270501
eCl@ss 8.0	27270501
eCl@ss 8.1	27270501
eCl@ss 9.0	27270501
eCl@ss 10.0	27270501
eCl@ss 11.0	27270501
eCl@ss 12.0	27270501
ETIM 5.0	EC001486
ETIM 6.0	EC001486
ETIM 7.0	EC001486
ETIM 8.0	EC001486
UNSPSC 16.0901	41112113


## Dimensional drawing (Dimensions in mm (inch))

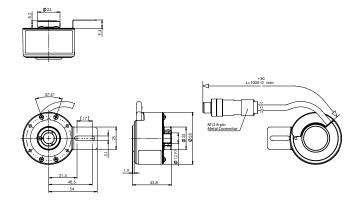

 $<sup>^{2)}</sup>$  These values relate to all mechanical versions including recommended accessories unless otherwise noted.

## Attachment specifications


### Blind hollow shaft



#### Customer side

Type Blind hollow shaft	Shaft diameter xj7
DBS60x-BAxxxxxxxx DBS60x-B1xxxxxxxxx	6 mm
DBS60x-BBxxxxxxxx DBS60x-B2xxxxxxxx	8 mm
DBS60x-BCxxxxxxxx DBS60x-B3xxxxxxxxx	3/8"
DBS60x-BDxxxxxxxx DBS60x-B4xxxxxxxx	10 mm
DBS60x-BExxxxxxxx DBS60x-B5xxxxxxxxx	12 mm
DBS60x-BFxxxxxxxx DBS60x-B6xxxxxxxxx	1/2"
DBS60x-BGxxxxxxxx DBS60x-B7xxxxxxxxx	14 mm
DBS60x-BHxxxxxxxx DBS60x-B8xxxxxxxxx	15 mm
DBS60x-BJxxxxxxxxx	5/8"

## PIN assignment




View of M12 male device connector on cable / housing

Wire colors (ca- ble connection)	Male connector M12, 8-pin	Male connector M23, 12-pin	TTL/HTL 6- channel signal	Explanation
Brown	1	6	A-	Signal wire
White	2	5	Α	Signal wire
Black	3	1	B-	Signal wire
Pink	4	8	В	Signal wire
Yellow	5	4	Z-	Signal wire
Purple	6	3	Z	Signal wire

Wire colors (ca- ble connection)	Male connector M12, 8-pin	Male connec- tor M23, 12-pin	TTL/HTL 6- channel signal	Explanation
Blue	7	10	GND	Ground connection
Red	8	12	+U <sub>s</sub>	Supply voltage
-	-	9	Not assigned	Not assigned
-	-	2	Not assigned	Not assigned
-	-	11	Not assigned	Not assigned
-	-	7	Not assigned	Not assigned
Screen	Screen	Screen	Screen	Screen connected to encoder housing


## **Diagrams**





## Operation note

Hollow shaft



Attention! If stator coupling is mounted, the zero pulse mark can be hidden by the stator coupling

- 1 Zero pulse mark on flange
- 2 Zero pulse is active when screw of clamping is inline with zero pulse mark on flange or housing mark

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

## **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

