

# MLG30A-0420R10801 MLG-2

**MEASURING AUTOMATION LIGHT GRIDS** 





# Ordering information

Туре	Part no.
MLG30A-0420R10801	1221996

Other models and accessories → www.sick.com/MLG-2

Illustration may differ



#### Detailed technical data

#### **Features**

i catares	
Device version	Pro - Advanced functionality
Sensor principle	Sender/receiver
Minimum detectable object (MDO)	30 mm, 34 mm <sup>1) 2) 3)</sup>
Beam separation	30 mm
Type of synchronization	Cable
Number of beams	15
Detection height	420 mm
Software features (default)	
$Q_1$	Presence detection
Q2 / IN	Teach input
Q <sub>3</sub>	Presence detection
Q4 / IN2	Presence detection
Teach	Standard mode
Operating mode	
Standard	✓
Transparent	✓
Dust- and sunlight-resistant	<b>✓</b>
Function	
Cross beam	
Beam blanking	✓

 $<sup>^{1)}\,\</sup>mathrm{MDO}$  min. detectable object at high measurement accuracy.

<sup>&</sup>lt;sup>2)</sup> MDO min. detectable object for standard measurement accuracy.

 $<sup>^{\</sup>rm 3)}$  Depending on beam separation without cross beam setting.

High measurement accuracy	<b>√</b>
Applications	
Switching output	Object recognition/object width Object recognition Height classification Hole detection/hole size Outside dimension/inside dimension Object position Hole position Zone definition
Data interface	Object detection Hole detection Object height measurement Measurement of external dimension Measurement of inside dimension Measurement of object position Measurement of hole position
Included with delivery	$1\times$ sender $1\times$ receiver $4/6\times$ QuickFix brackets for monitoring heights above $2$ m) $1\times$ Quick Start Guide

 $<sup>^{1)}</sup>$  MDO min. detectable object at high measurement accuracy.

# Mechanics/electronics

Light source	LED, Infrared light
Wave length	850 nm
Supply voltage $V_{\rm s}$	DC 19.2 V 28.8 V <sup>1)</sup>
Power consumption sender	55.75 mA <sup>2)</sup>
Power consumption receiver	123 mA <sup>2)</sup>
Ripple	< 5 V <sub>pp</sub>
Output current I <sub>max.</sub>	100 mA
Output load, capacitive	100 nF
Output load, Inductive	1H
Initialization time	<1s
Switching output	Push-pull: PNP/NPN
Connection type	Male connector M12, 5-pin, 0.22 m Male connector M12, 8-pin, 0.27 m M12 female connector, 4-pin, D-coded, 0.19 m
Housing material	Aluminum
Indication	LED
Enclosure rating	IP65, IP67 3)
Circuit protection	U <sub>V</sub> connections, reverse polarity protected Output Q short-circuit protected Interference pulse suppression
Protection class	III

<sup>1)</sup> Without load.

<sup>&</sup>lt;sup>2)</sup> MDO min. detectable object for standard measurement accuracy.

<sup>3)</sup> Depending on beam separation without cross beam setting.

<sup>&</sup>lt;sup>2)</sup> , Without load with 24 V.

<sup>3)</sup> Operating in outdoor condition only with a external protection housing.

# MEASURING AUTOMATION LIGHT GRIDS

Weight	1.149 kg
Front screen	PMMA
Option	None
UL File No.	NRKH.E181493

<sup>1)</sup> Without load.

#### Performance

Maximum range	12 m <sup>1)</sup>
Minimum range	≥ 0 m
Operating range	8.5 m
Response time	3.6 ms <sup>2)</sup>

 $<sup>^{1)}</sup>$  No reserve for environmental issue and deterioration of the diode.

# Communication interface

IO-Link	<b>√</b> , IO-Link V1.1
Data transmission rate	230,4 kbit/s (COM3)
Maximum cable length	20 m
Cycle time	2.3 ms
VendorID	26
DeviceID HEX	800068
DeviceID DEC	8388712
Process data length	32 Byte (TYPE_2_V) 1)
Inputs/outputs	4 x Q (IO-Link)
Digital output	$Q_1 \dots Q_4$
Number	4
Digital input	In <sub>1</sub> , In <sub>2</sub>
Number	2

<sup>1)</sup> With an IO-Link master with V1.0, fall back to interleaved mode (consisting of TYPE\_1\_1 (ProcessData) and TYPE\_1\_2 (On-request Data)).

#### Ambient data

Shock resistance	Continuous shocks 10 g, 16 ms, 1000 shocks Single shocks 15 g, 11 ms 3 per axle
Vibration resistance	Sinusoidal oscillation 10-150 Hz 5 g
EMC	EN 60947-5-2
Ambient light immunity	Direct: 150,000 lx <sup>1)</sup> Indirect: 200,000 lx <sup>2)</sup>
Ambient operating temperature	-30 °C +55 °C
Ambient temperature, storage	-40 °C +70 °C

<sup>&</sup>lt;sup>1)</sup> Outdoor mode.

 $<sup>^{2)}</sup>$  , Without load with 24 V.

<sup>3)</sup> Operating in outdoor condition only with a external protection housing.

<sup>&</sup>lt;sup>2)</sup> Without high speed.


 $<sup>^{2)}</sup>$  Light resistance indirect.

# Smart Task

Smart Task name	Base logics
Classifications	
ECLASS 5.0	27270910
ECLASS 5.1.4	27270910
ECLASS 6.0	27270910
ECLASS 6.2	27270910
ECLASS 7.0	27270910
ECLASS 8.0	27270910
ECLASS 8.1	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
UNSPSC 16.0901	39121528

#### Dimensional drawing (Dimensions in mm (inch))

#### Dimensional drawing

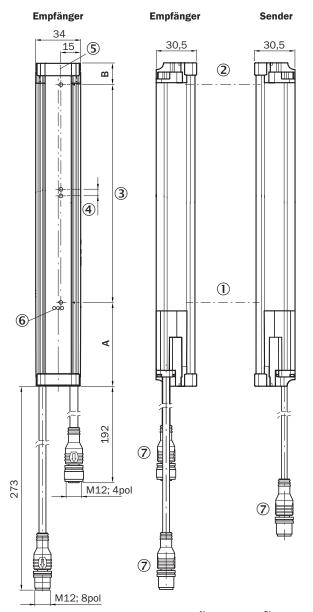

Sender				
		34		
(5)	) _	15		
6		φ		
Т				
216.2		M12; 5 <sub>1</sub>	<u>ool</u>	

	<b>A</b> 1)	$B^{2)}$
Strahlabstand 2,5 mm	62,25	17,15
Strahlabstand 5 mm	63,3	16,1
Strahlabstand 10 mm	68,3	16,1
Strahlabstand 20 mm	68,3/78,33)	16,1
Strahlabstand 25 mm	83,3	16,1
Strahlabstand 30 mm	88,3	16,1
Strahlabstand 50 mm	108,3	16,1

Abstand: MLG-2 Kante - erster Strahl
 Abstand: MLG-2 Kante - letzter Strahl
 MLG20x-xx40: 68,3 mm MLG20x-xx80: 78,3 mm

① First beam


② Last beam

<sup>3</sup> Detection height (see technical data)

- ④ Beam separation
- ⑤ Optical axis
- Status indicator: green, yellow, red LEDs
- ⑦ Connection

#### Adjustments


#### Adjustments




① Status indicator: green, yellow, red LEDs

# Connection type and diagram

Connector M12, 5/8-pin, switching outputs Q




# Pin assignment

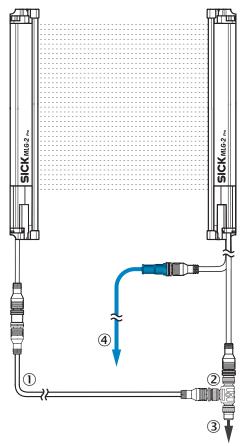


- ① Connection cable receiver (2096010)
- T-piece Connection cable (6020664)
- Ethernet Connection cable

# Connection diagram

T-junction, PLC

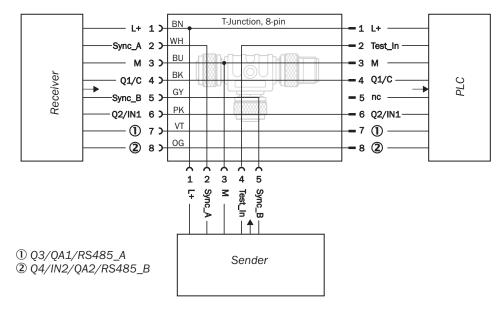

T-junction, IO-Link-Master

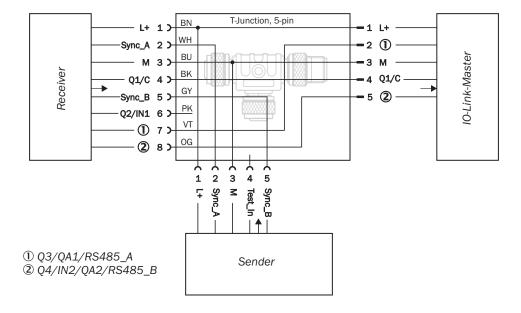

#### Recommended accessories

Other models and accessories → www.sick.com/MLG-2

	Brief description	Туре	Part no.		
Distributors					
500	<ul> <li>Connection type head A: Female connector, M12, 5-pin, A-coded</li> <li>Connection type head B: Female connector, M12, 8-pin, A-coded</li> <li>Connection type head C: Male connector, M12, 8-pin, A-coded</li> <li>Note: Male connector M12, 8-pin, to 1 x female connector M12, 8-pin, to 1 x female connector M12, 5-pin, for connecting of a PLC</li> </ul>	SB0-02F12-SM1	6053172		
Plug connecto	ors and cables				
	<ul> <li>Connection type head A: Female connector, M12, 8-pin, straight</li> <li>Connection type head B: Flying leads</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 8-wire, PVC</li> <li>Description: Sensor/actuator cable, special color code, shielded</li> <li>Connection systems: Flying leads</li> </ul>	DOL-1208-G05MF	6020664		
10 10	<ul> <li>Connection type head A: Female connector, M12, 5-pin, straight, A-coded</li> <li>Connection type head B: Male connector, M12, 5-pin, straight, A-coded</li> <li>Signal type: Sensor/actuator cable</li> <li>Cable: 5 m, 5-wire, PUR, halogen-free</li> <li>Description: Sensor/actuator cable, unshielded</li> <li>Application: Zones with oils and lubricants, Drag chain operation, Robot</li> </ul>	YF2A15- 050UB5M2A15	2096010		
88	<ul> <li>Connection type head A: Male connector, M12, 4-pin, straight, D-coded</li> <li>Connection type head B: Male connector, RJ45, 4-pin, straight</li> <li>Signal type: Ethernet, PROFINET</li> <li>Cable: 5 m, 4-wire, PUR, halogen-free</li> <li>Description: Ethernet, PROFINET, shielded</li> <li>Application: Drag chain operation, Zones with oils and lubricants</li> </ul>	YM2D24- 050PN1MRJA4	2106184		
Sensor Integra	ation Gateway				
	Further functions: Web server integrated, USB connection for easy configuration of the SIG200 Sensor Integration Gateway with SOPAS ET, the engineering tool from SICK, logic editor is available for easy configuration of logic functions Connection CONFIG: 1 x M8, 4-pin female connector, USB 2.0 (USB-A) Logic editor: yes Communication interface: IO-Link, USB, Ethernet, PROFINET, REST API Product category: IO-Link Master	SIG200-0A0412200	1089794		
	Further functions: Web server integrated, USB connection for easy configuration of the SIG200 Sensor Integration Gateway with SOPAS ET, the engineering tool from SICK, logic editor is available for easy configuration of logic functions Connection CONFIG: 1 x M8, 4-pin female connector, USB 2.0 (USB-A) Logic editor: yes Communication interface: IO-Link, USB, Ethernet, REST API Product category: IO-Link Master	SIG200-0A0G12200	1102605		

# SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

# **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

