



FX3-MOC100010

Flexi Soft Drive Monitor

SAFE MOTION MONITORING AND CONTROL

SICK
Sensor Intelligence.




Ordering information

Description	Protective coating	Type	Part no.
Safe speed monitoring and safe position monitoring	✓	FX3-MOC100010	1112300

Protective coating for more challenging ambient conditions (e.g., resistance to sulfur).

Other models and accessories → www.sick.com/Flexi_Soft_Drive_Monitor



Detailed technical data

Features

Module	Motion Control module
Configuration method	Via software (Flexi Soft Designer, Safe EFL-pro System: Safety Designer)
Specialty	Protective coating for more challenging ambient conditions (e.g., resistance to sulfur).

Safety-related parameters

For axes with two encoders (any combination of sine-cosine, TTL, HTL 24 V, MTL 12 V, RS-422, SSI)	
Safety integrity level	SIL 3 (IEC 61508)
Category	Category 4 (EN ISO 13849)
Performance level	PL e (EN ISO 13849)
PFH _D (mean probability of a dangerous failure per hour)	5.0×10^{-9}
Minimum movement for error detection	\geq Selected tolerance limit of the function block used for cross check, e.g., position cross check, At least 1 x within 24 h
T _M (mission time)	20 years (EN ISO 13849)
For axes with one sine-cosine encoder and sin/cos analog voltage monitoring activated	
Safety integrity level	SIL 2 (IEC 61508)
Category	Category 3 (EN ISO 13849)
Performance level	PL d (EN ISO 13849)
PFH _D (mean probability of a dangerous failure per hour)	6.0×10^{-9}
Minimum movement for error detection	≥ 1 Sin/Cos period, At least 1 x within 24 h
T _M (mission time)	20 years (EN ISO 13849)

Functions

Drive safety functions	Safe stop 1 (SS1)
-------------------------------	-------------------

	Safe stop 2 (SS2) Safe operating stop (SOS) Safe speed monitoring (SSM) Safely-limited speed (SLS) Safe direction (SDI) Safe brake control (SBC) Safe cam (SCA) Safely-limited position (SLP)
--	--

Interfaces

Encoder interface	A/B incremental encoder, TTL A/B incremental encoder, HTL 12 V or 24 V A/B incremental encoder, RS-422 Sin/cos encoder SSI encoder (master / listener) HIPERFACE®
Connection type	Male connector, Micro D-Sub, 15-pin
Data interface	Internal bus (FLEXBUS+)

Electrical data

Protection class	III (EN 61140)										
Voltage supply	Via FLEXBUS+										
Internal power consumption	≤ 2.5 W ¹⁾										
A/B incremental encoder, TTL, 2 outputs	<table border="0"> <tr> <td>Differential input voltage HIGH</td><td>5 V (2 V ... 5.3 V)²⁾</td></tr> <tr> <td>Differential input voltage LOW</td><td>0 V (-0.3 V ... 0.8 V)²⁾</td></tr> <tr> <td>Input voltage</td><td>-5 V ... 10 V³⁾</td></tr> <tr> <td>Input frequency</td><td>≤ 300 kHz</td></tr> <tr> <td>Input resistance</td><td>≥ 35 kΩ</td></tr> </table>	Differential input voltage HIGH	5 V (2 V ... 5.3 V) ²⁾	Differential input voltage LOW	0 V (-0.3 V ... 0.8 V) ²⁾	Input voltage	-5 V ... 10 V ³⁾	Input frequency	≤ 300 kHz	Input resistance	≥ 35 kΩ
Differential input voltage HIGH	5 V (2 V ... 5.3 V) ²⁾										
Differential input voltage LOW	0 V (-0.3 V ... 0.8 V) ²⁾										
Input voltage	-5 V ... 10 V ³⁾										
Input frequency	≤ 300 kHz										
Input resistance	≥ 35 kΩ										
A/B incremental encoder, TTL, 2 pairs of outputs	<table border="0"> <tr> <td>Differential input voltage HIGH</td><td>5 V (1.2 V ... 5.6 V)²⁾</td></tr> <tr> <td>Differential input voltage LOW</td><td>-5 V (-5.6 V ... -1.2 V)²⁾</td></tr> <tr> <td>Input voltage</td><td>-5 V ... 10 V³⁾</td></tr> <tr> <td>Input frequency</td><td>≤ 300 kHz</td></tr> <tr> <td>Input resistance</td><td>≥ 35 kΩ</td></tr> </table>	Differential input voltage HIGH	5 V (1.2 V ... 5.6 V) ²⁾	Differential input voltage LOW	-5 V (-5.6 V ... -1.2 V) ²⁾	Input voltage	-5 V ... 10 V ³⁾	Input frequency	≤ 300 kHz	Input resistance	≥ 35 kΩ
Differential input voltage HIGH	5 V (1.2 V ... 5.6 V) ²⁾										
Differential input voltage LOW	-5 V (-5.6 V ... -1.2 V) ²⁾										
Input voltage	-5 V ... 10 V ³⁾										
Input frequency	≤ 300 kHz										
Input resistance	≥ 35 kΩ										
A/B incremental encoder, HTL 12 V, 2 outputs	<table border="0"> <tr> <td>Differential input voltage HIGH</td><td>12 V (6.5 V ... 15 V)²⁾</td></tr> <tr> <td>Differential input voltage LOW</td><td>0 V (-1 V ... 2.5 V)²⁾</td></tr> <tr> <td>Input voltage</td><td>-5 V ... 20 V³⁾</td></tr> <tr> <td>Input frequency</td><td>≤ 300 kHz</td></tr> <tr> <td>Input resistance</td><td>≥ 35 kΩ</td></tr> </table>	Differential input voltage HIGH	12 V (6.5 V ... 15 V) ²⁾	Differential input voltage LOW	0 V (-1 V ... 2.5 V) ²⁾	Input voltage	-5 V ... 20 V ³⁾	Input frequency	≤ 300 kHz	Input resistance	≥ 35 kΩ
Differential input voltage HIGH	12 V (6.5 V ... 15 V) ²⁾										
Differential input voltage LOW	0 V (-1 V ... 2.5 V) ²⁾										
Input voltage	-5 V ... 20 V ³⁾										
Input frequency	≤ 300 kHz										
Input resistance	≥ 35 kΩ										
A/B incremental encoder, HTL 12 V, 2 pairs of outputs											

1) Via FLEXBUS+, without streams at analog inputs.

2) Voltage between ENC_x_y+ and ENC_x_y-.

3) Voltage between ENC_x_y+ and ENC_OV and between ENC_x_y- and ENC_OV.

4) Peak to peak voltage between ENC_x_y+ and ENC_x_y-.

FX3-MOC100010 | Flexi Soft Drive Monitor

SAFE MOTION MONITORING AND CONTROL

	Differential input voltage HIGH	12 V (4 V ... 15 V) ²⁾
	Differential input voltage LOW	-12 V (-15 V ... -4 V) ²⁾
	Input voltage	-5 V ... 20 V ³⁾
	Input frequency	≤ 300 kHz
	Input resistance	≥ 35 kΩ
A/B incremental encoder, HTL 24 V, 2 outputs		
	Differential input voltage HIGH	24 V (13 V ... 30 V) ²⁾
	Differential input voltage LOW	0 V (-3 V ... 5 V) ²⁾
	Input voltage	-10 V ... 40 V ³⁾
	Input frequency	≤ 300 kHz
	Input resistance	≥ 35 kΩ
A/B incremental encoder, HTL 24 V, 2 pairs of outputs		
	Differential input voltage HIGH	24 V (8 V ... 30 V) ²⁾
	Differential input voltage LOW	-24 V (-30 V ... -8 V) ²⁾
	Input voltage	-10 V ... 40 V ³⁾
	Input frequency	≤ 300 kHz
	Input resistance	≥ 35 kΩ
A/B incremental encoder, RS-422		
	Differential input voltage HIGH	0.2 V ... 5 V ²⁾
	Differential input voltage LOW	-5 V ... -0.2 V ²⁾
	Input voltage	-7 V ... 7 V ³⁾
	Input frequency	≤ 1,000 kHz
	Input resistance	≥ 35 kΩ
	Differential resistance	120 Ω (100 Ω ... 150 Ω)
Sin/cos encoder		
	Differential input voltage	1 V (0.8 V ... 1.2 V) ⁴⁾
	Input voltage	0 V ... 5 V ³⁾
	Input frequency	≤ 120 kHz
	Input resistance	1 kΩ (0.9 kΩ ... 1.1 kΩ)
Voltage monitoring, lower limit for vector length monitoring		0.5 V
Voltage monitoring, upper limit for vector length monitoring		1.5 V
SSI encoder (master / listener)		
	Differential resistance	120 Ω (100 Ω ... 150 Ω)
	Clock frequency	100 kHz ... 1,000 kHz

¹⁾ Via FLEXBUS+, without streams at analog inputs.

²⁾ Voltage between ENC_x_y+ and ENC_x_y-.

³⁾ Voltage between ENC_x_y+ and ENC_OV and between ENC_x_y- and ENC_OV.

⁴⁾ Peak to peak voltage between ENC_x_y+ and ENC_x_y-.

Cycle gaps between the data packages (monoflop time)	$\geq 100 \mu\text{s}$
Position data bits per frame	16 ... 62

1) Via FLEXBUS+, without streams at analog inputs.

2) Voltage between ENC_x_y+ and ENC_x_y-.

3) Voltage between ENC_x_y+ and ENC_OV and between ENC_x_y- and ENC_OV.

4) Peak to peak voltage between ENC_x_y+ and ENC_x_y-.

Mechanical data

Dimensions (W x H x D)	22.5 mm x 96.5 mm x 126 mm
Weight	120 g

Ambient data


Enclosure rating	IP20 (EN 60529)
Ambient operating temperature	-25 °C ... +55 °C
Storage temperature	-25 °C ... +70 °C
Air humidity	$\leq 95\%$, Non-condensing
Single gas resistance (sulfur dioxide)	25 ppm, 21 days, 25 °C (IEC 60068-2-42 - Kc)
Mixed gas resistance	100 ppb - H ₂ S 2000 ppb - NO ₂ 100 ppb - Cl ₂ 2,000 ppb - SO ₂ , 21 days, 30 °C (IEC 60068-2-60 Ke)

Classifications

ECLASS 5.0	27243001
ECLASS 5.1.4	27243101
ECLASS 6.0	27243101
ECLASS 6.2	27243101
ECLASS 7.0	27243101
ECLASS 8.0	27243101
ECLASS 8.1	27243101
ECLASS 9.0	27243101
ECLASS 10.0	27243101
ECLASS 11.0	27243101
ECLASS 12.0	27243101
ETIM 5.0	EC001449
ETIM 6.0	EC001449
ETIM 7.0	EC001449
ETIM 8.0	EC001449
UNSPSC 16.0901	32151705


Dimensional drawing (Dimensions in mm (inch))

FX3-MOC0, FX3-MOC1

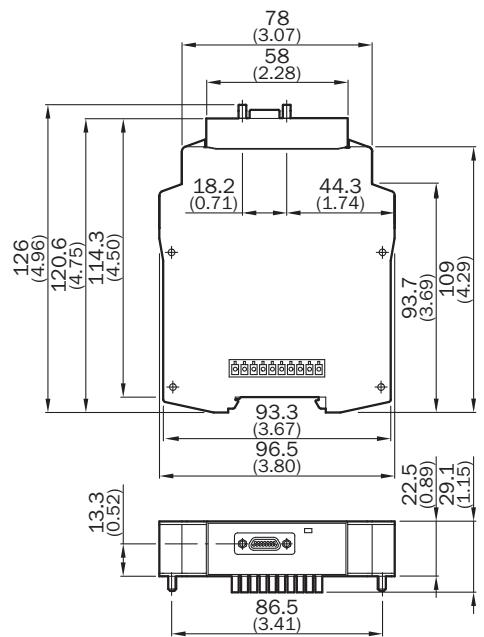

PIN assignment

FX3-MOC0, FX3-MOC1

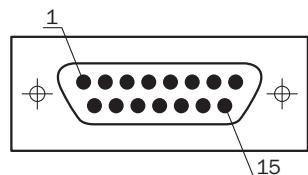

Pin	Signal	Color-coded connecting cable
1	ENC1_A+	White
2	ENC1_B+	Green
3	ENC1_C+	Gray
4	ENC1_24V	Blue
5	ENC2_24V	Red
6	ENC2_C+	White-green
7	ENC2_B+	Gray-pink
8	ENC2_A+	Black
9	ENC1_A-	Brown
10	ENC1_B-	Yellow
11	ENC1_C-	Pink
12	ENC_OV	White-yellow
13	ENC2_C-	Brown-green

Pin	Signal	Color-coded connecting cable
14	ENC2_B-	Red-blue
15	ENC2_A-	Violet

Recommended accessories

Other models and accessories → www.sick.com/Flexi_Soft_Drive_Monitor

	Brief description	Type	Part no.
Others	 <ul style="list-style-type: none"> Sub product family: SIM1000 FX Product category: Programmable devices Supported products: 2D and 3D LiDAR sensors, pico- und midiCam series, incremental and absolute encoders, Image-based code readers, Fixed mount barcode scanners, RFID read/write device, displacement measurement sensors, Photoelectric sensors, Flexi Soft main module Processor: Dual-core ARM Cortex-A9 CPU with NEON accelerator Toolkit: SICK algorithm API Further functions: FPGA for I/O handling Connections: Terminal block 1-4, Ethernet, FLEXBUS+ Enclosure rating: IP20 	SIM1000-OP0B110	1097817

Safety switching amplifier

	<ul style="list-style-type: none"> Applications: Output expansion module for OSSDs Compatible sensor types: Safety sensors with OSSDs Connection type: Front connector with spring terminals Restart interlock: no External device monitoring (EDM): Via path Outputs: 2 enabling current paths (safe), 1 feedback current path (for use as external device monitoring, not safe) Housing width: 18 mm 	RLY3-OSSD100	1085343
	<ul style="list-style-type: none"> Applications: Output expansion module for OSSDs Compatible sensor types: Safety sensors with OSSDs Connection type: Front connector with spring terminals Restart interlock: no External device monitoring (EDM): Via path Outputs: 4 enabling current paths (safe), 1 feedback current path (for use as external device monitoring, not safe), 1 signaling current path (not safe) Housing width: 28 mm 	RLY3-OSSD400	1099971

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations www.sick.com