



ROTARY CAM SWITCH 7GN SERIES, STAR-DELTA MOTOR STARTER SWITCH 125A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 90X90MM

| Product designation  |                  |          |    | Rotary cam  |
|--|------------------|----------|----|---|
| _  |                  |          |    | switches  |
| Product type designation  General characteristics  |                  |          |    | 7GN125  |
| Switching diagram  |                  |          |    | 12 - Star-delta<br>motor starter  |
| N° of elements   |                  |          |    | switch 4  |
| Mounting form  |                  |          |    | U65 - Front mounting with red/yellow handle padlockable in 0 and protection |
|  |                  |          |    | covers  |
| Contact characteristics  |                  |          |    |   |
| Rated insulation voltage Ui  |                  |          |    |   |
|  |                  | IEC/EN   | V  | 690   |
| Datad insurals a with stand walter   | na I liana       | UL/CSA   | V  | 600   |
| Rated impulse withstand voltage Conventional free air thermal conventional free air the conventional free air th |                  |          | kV | 6   |
| Conventional free all thermal c  | unent iui        | IEC/EN   | Α  | 125   |
|  |                  | UL/CSA   | A  | 130   |
| Rated operational voltage  |                  | 32,007 t | V  | 690   |
| Rated operational impulse volt   | age              |          | kV | 6   |
| Maximum fuse size for short-ci   |                  |          |    |   |
|  | , ,              | 10kA     | Α  | 125   |
|  |                  | 15kA     | Α  | 100   |
|  |                  | 25kA     | Α  | 100   |
|  |                  | 50kA     | Α  | 100   |
|  |                  | 63kA     | Α  | 100   |
| Rated short time current Icw   |                  | 1s       | Α  | 2100  |
| Conductivity   |                  |          |    | 10/5 mA/V   |
| Operational current le IEC/EN  |                  |          |    |   |
| AC1/A  | AC21A            |          |    |   |
|  |                  |          | Α  | 125   |
| AC15   |                  |          |    |   |
|  |                  | 110V     | Α  | 40  |
|  |                  | 220/230V | A  | 28  |
|  |                  | 380/400V | A  | 15  |
| Rated operational power in AC  |                  | 660/690V | Α  | 5   |
|  | ,<br>-phase AC-3 |          |    |   |
| Tillee   | phase Ao o       | 220/230V | kW | 18.5  |
|  |                  | 380/440V | kW | 37  |
|  |                  | 500/690V | kW | 33  |
| Single   | -phase AC-3      |          |    |   |
| v  |                  | 110V     | kW | 5   |
|  |                  | 220/230V | kW | 11  |
|  |                  | 380/440V | kW | 15  |
| Three  | -phase AC23A     |          |    |   |
|  |                  | 220/230V | kW | 30  |
|  |                  | 380/440V | kW | 45  |
|  |                  | 500/690V | kW | 37  |





ROTARY CAM SWITCH 7GN SERIES, STAR-DELTA MOTOR STARTER SWITCH 125A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 90X90MM

|                         | Single-phase AC23A                    |          |        |                   |
|-------------------------|---------------------------------------|----------|--------|-------------------|
|                         | 5 1                                   | 110V     | kW     | 5                 |
|                         |                                       | 220/230V | kW     | 11                |
|                         |                                       | 380/440V | kW     | 15                |
| Rated operational curr  | rent in DC                            |          |        |                   |
| rator operational our   | DC21A                                 |          |        |                   |
|                         | DOZTA                                 | 48V      | Α      | 125               |
|                         |                                       | 60V      | A      | 80                |
|                         |                                       | 110V     |        |                   |
|                         |                                       |          | A      | 10                |
|                         |                                       | 220V     | Α      | 1.2               |
|                         | DC23A (poles in series)               |          | _      |                   |
|                         |                                       | 24V      | Α      | 125 (1)           |
|                         |                                       | 48V      | Α      | 125 (2)           |
|                         |                                       | 60V      | Α      | 125 (3)           |
|                         |                                       | 110V     | Α      | 50 (3)            |
|                         |                                       | 220V     | Α      | 20 (4)            |
|                         | DC13                                  |          |        |                   |
|                         |                                       | 24V      | Α      | 125               |
|                         |                                       | 48V      | Α      | 100               |
|                         |                                       | 60V      | Α      | 50                |
|                         |                                       | 110V     | A      | 4                 |
| Power dissipation       |                                       | 1100     | W      | 6.3               |
| Mechanical features     |                                       |          | V V    | 0.0               |
| Terminals screw         |                                       |          |        | M2X5              |
|                         |                                       |          |        |                   |
| Tightening torque for t | erminals max                          |          | Nm     | 2                 |
| Conductor size          |                                       |          |        |                   |
|                         | AWG - Rigid cable                     |          |        |                   |
|                         |                                       | min      | AWG    | 14                |
|                         |                                       | Max      | AWG    | 1/0               |
|                         | AWG - Flexible cable                  |          |        |                   |
|                         |                                       | min      | AWG    | 14                |
|                         |                                       | Max      | AWG    | 1/0               |
|                         | Conductor size (IEC) - Flexible cable | -        |        |                   |
|                         | ,                                     | min      | mm²    | 2.5               |
|                         |                                       | Max      | mm²    | 50                |
|                         | Conductor size (IEC) - Rigid cable    | IVION    |        |                   |
|                         | Conductor Sizo (IEO) Trigid Gabio     | min      | mm²    | 2.5               |
|                         |                                       | Max      | mm²    | 50                |
| Mechanical life         |                                       | IVIAX    |        |                   |
|                         |                                       |          | cycles | 1X10 <sup>6</sup> |
| UL technical data       | Programme Conference                  |          |        |                   |
| Motor power for direct  |                                       |          |        |                   |
|                         | for three-phase motor                 |          |        |                   |
|                         |                                       | 120V     | HP     | 15                |
|                         |                                       | 240V     | HP     | 25                |
|                         |                                       | 480V     | HP     | 50                |
|                         |                                       | 600V     | HP     | 40                |
|                         | for single-phase motor                |          |        |                   |
|                         | •                                     | 120V     | HP     | 5                 |
|                         |                                       | 240V     | HP     | 15                |
| Ambient conditions      |                                       | 2.01     |        |                   |
| Temperature             |                                       |          |        |                   |
| romporature             | Operating temperature                 |          |        |                   |
|                         | Operating temperature                 | min      | °C     | -25               |
|                         |                                       |          |        |                   |
|                         |                                       | max      | °C     | +55               |






Resistance & Protection
Frontal IP degree
Terminals IP degree

ROTARY CAM SWITCH 7GN SERIES, STAR-DELTA MOTOR STARTER SWITCH 125A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 90X90MM


| Storage temperature |     |    |      |  |
|---------------------|-----|----|------|--|
|                     | min | °C | -40  |  |
|                     | max | °C | +70  |  |
| on                  |     |    |      |  |
|                     |     |    | IP40 |  |
|                     |     |    | IP00 |  |

#### **Dimensions**

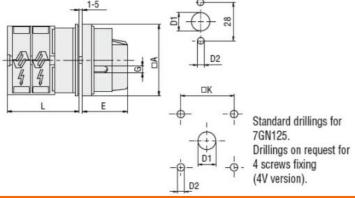

| Series | Dimensions |    |    |      | L |    |      |      |       |       |
|--------|------------|----|----|------|---|----|------|------|-------|-------|
|        | □A         | D1 | D2 | Е    | G | □K | 1    | 2    | 3     | 12    |
| 7GN12  | 65         | 12 | 5  | 34.2 | 5 | 36 | 36.1 | 45.8 | 55.5  | 142.8 |
| 7GN20  | 65         | 12 | 5  | 34.2 | 5 | 36 | 36.1 | 45.8 | 55.5  | 142.8 |
| 7GN25  | 65         | 12 | 5  | 34.2 | 5 | 36 | 40.5 | 54.1 | 67.7  | 190.1 |
| 7GN32  | 65         | 14 | 5  | 38   | 6 | 48 | 46.5 | 61.6 | 76.7  | 212.6 |
| 7GN40  | 65         | 14 | 5  | 38   | 6 | 48 | 46.5 | 61.6 | 76.7  | 212.6 |
| 7GN63  | 65         | 14 | 5  | 38   | 6 | 48 | 50.3 | 68.4 | 86.5  | 249.4 |
| 7GN125 | 90         | 16 | 6  | 49   | 7 | 68 | 67.3 | 96.4 | 125.5 | 394.9 |

## Wiring diagrams

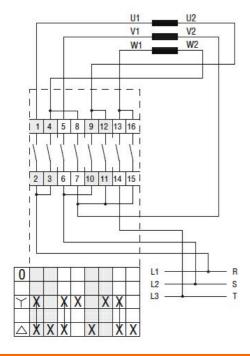

### Certifications and compliance

## Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

UL60947-4-1

# Certificates

EAC

UL

### ETIM classification



## 7GN12512U65

ROTARY CAM SWITCH 7GN SERIES, STAR-DELTA MOTOR STARTER SWITCH 125A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 90X90MM

ETIM 8.0

EC001029 -Selector switch, complete