



ROTARY CAM SWITCH 7GN SERIES, STAR-DELTA MOTOR STARTER SWITCH 20A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 65X65MM

Product designation				Rotary cam
_				switches
Product type designa General characteristic				7GN20
Switching diagram	,S			12 - Star-delta motor starter
				switch
N° of elements				4
Mounting form Contact characteristic	ig.			U65 - Front mounting with red/yellow handle padlockable in 0 and protection covers
Rated insulation volta				
		IEC/EN UL/CSA	V V	690 600
Rated impulse withsta			kV	6
Conventional free air	thermal current Ith	IEC/EN UL/CSA	A A	20 20
Rated operational vol	tage	UL/CSA		480
Rated operational imp			kV	4
	or short-circuit protection In (gG)			<u> </u>
	, ,	10kA	Α	20
		15kA	Α	16
		25kA	Α	16
Rated short time curre	ent Icw	1 s	Α	250
Conductivity				10/5 mA/V
Operational current le	e IEC/EN			_
	AC1/AC21A		Α	20
	AC15			
		110V	Α	10
		220/230V	A A	8 6
		380/400V 660/690V	A	1.5
Rated operational pov	wer in AC	000/030 V		1.0
, op 3. a p 3.	Three-phase AC-3			
	·	220/230V	kW	3
		380/440V	kW	5.5
		500/690V	kW	5.5
	Single-phase AC-3			
		110V	kW	0.8
		220/230V 380/440V	kW kW	2.2 3
	Three-phase AC23A	300/4407	r. v v	<u>ა</u>
	THIOC PHASE NOZON	220/230V	kW	5
		380/440V	kW	7.5
		500/690V	kW	7.5
	Single-phase AC23A			
		110V	kW	0.8



ROTARY CAM SWITCH 7GN SERIES, STAR-DELTA MOTOR STARTER SWITCH 20A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 65X65MM

		/		
		220/230V	kW	2.5
		380/440V	kW	3.7
Rated operational curr				
	DC21A			
		48V	Α	20
		60V	Α	20
		110V	Α	4
		220V	Α	0.6
		440V	Α	0.25
	DC23A (poles in series)			
		24V	Α	20 (1)
		48V	Α	20 (2)
		60V	Α	20 (3)
		110V	Α	10 (3)
		220V	Α	8 (4)
	DC13			_
		24V	Α	20
		48V	Α	16
		60V	Α	12
		110V	Α	1
		220V	Α	0.4
		440V	Α	0.15
Power dissipation			W	0.8
Mechanical features				
Terminals screw				M3
Tightening torque for to	erminals max		Nm	0.5
Conductor size				
0011440101 0120	AWG - Rigid cable			
	7. Trigia dabid	min	AWG	20
		Max	AWG	12
	AWG - Flexible cable	IVICA	7,1110	12
	AVVO T TEXABLE CABLE	min	AWG	20
		Max	AWG	14
	Conductor size (IEC) Flevible cable	IVIAA	AVVG	14
	Conductor size (IEC) - Flexible cable	min	mm²	0.5
		min May		
	Conductor size (IEC) Divid soble	Max	mm²	2.5
	Conductor size (IEC) - Rigid cable	*	no no ?	0.5
		min May	mm²	0.5
Manharitallif		Max	mm²	2.5
Mechanical life			cycles	5x10 ⁶
UL technical data	Parameter I			
Motor power for direct-				
	for three-phase motor			
		120V	HP	1.5
		240V	HP	3
		480V	HP	7.5
	-	600V	HP	10
	for single-phase motor			
		120V	HP	0.75
		240V	HP	2
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25






ROTARY CAM SWITCH 7GN SERIES, STAR-DELTA MOTOR STARTER SWITCH 20A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 65X65MM


	max	°C	+55	
Storage temperature				
	min	°C	-40	
	max	°C	+70	
Resistance & Protection				
Frontal IP degree			IP40	
Terminals IP degree			IP00	

Dimensions

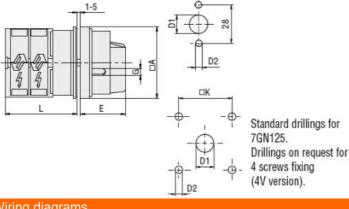

Carion		Dimensions					L			
Series	□A	D1	D2	Е	G	□K	1	2	3	12
7GN12	65	12	5	34.2	5	36	36.1	45.8	55.5	142.8
7GN20	65	12	5	34.2	5	36	36.1	45.8	55.5	142.8
7GN25	65	12	5	34.2	5	36	40.5	54.1	67.7	190.1
7GN32	65	14	5	38	6	48	46.5	61.6	76.7	212.6
7GN40	65	14	5	38	6	48	46.5	61.6	76.7	212.6
7GN63	65	14	5	38	6	48	50.3	68.4	86.5	249.4
7GN125	90	16	6	49	7	68	67.3	96.4	125.5	394.9

Wiring diagrams

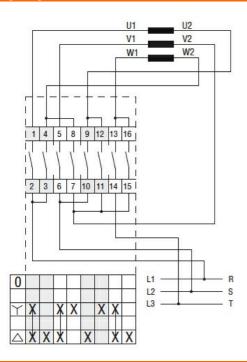

Certifications and compliance

\sim	. 11	
Com	nııar	าดค

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

UL60947-4-1

Certificates

cCSAus

EAC

UL

ETIM classification



7GN2012U65

ROTARY CAM SWITCH 7GN SERIES, STAR-DELTA MOTOR STARTER SWITCH 20A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 65X65MM

ETIM 8.0

EC001029 -Selector switch, complete