



ROTARY CAM SWITCH 7GN SERIES, STAR-DELTA MOTOR STARTER SWITCH 63A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 65X65MM

Product designation				Rotary cam
-				switches
Product type designati General characteristics				7GN63
Switching diagram	,			12 - Star-delta motor starter switch
N° of elements				4
Mounting form Contact characteristics				U65 - Front mounting with red/yellow handle padlockable in 0 and protection covers
Rated insulation voltag	e Ui			
		IEC/EN UL/CSA	V V	690 600
Rated impulse withstar			kV	6
Conventional free air th	nermal current Ith	IEC/EN UL/CSA	A A	63 60
Rated operational volta	age		V	480
Rated operational imp	ulse voltage		kV	4
Maximum fuse size for	short-circuit protection In (gG)			
		10kA	Α	63
		15kA	A	63
		25kA	A	63
		50kA 63kA	A A	63 63
Rated short time curre	nt Icw	OOKA		00
		1s	Α	1600
Conductivity				10/5 mA/V
Operational current le	IEC/EN			
	AC1/AC21A			
	-		A	63
	AC15	440\/	۸	20
		110V 220/230V	A A	32 25
		380/400V	A	15
		660/690V	Α	4
Rated operational pow	er in AC			
	Three-phase AC-3			
		220/230V	kW	11
		380/440V	kW	18.5
		500/690V	kW	18.5
	Single-phase AC-3	4401	1444	2.7
		110V 220/230V	kW kW	3.7 6.5
		380/440V	kW	11.5
	Three-phase AC23A	330/770 V	17.4.4	11.0
		220/230V	kW	12.5
		380/440V	kW	30
		500/690V	kW	30





ROTARY CAM SWITCH 7GN SERIES, STAR-DELTA MOTOR STARTER SWITCH 63A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 65X65MM

	Single-phase AC23A			
	3 1	110V	kW	3.7
		220/230V	kW	7.5
		380/440V	kW	12.5
Rated operational curi	rent in DC	333,1101		.2.0
rator operational our	DC21A			
	DOZTA	48V	Α	63
		60V	A	50
		110V		
			A	8
	D0004 (. l l)	220V	Α	1
	DC23A (poles in series)		_	
		24V	Α	50 (1)
		48V	Α	50 (2)
		60V	Α	50 (3)
		110V	Α	25 (3)
		220V	Α	15 (4)
	DC13			
		24V	Α	63
		48V	Α	40
		60V	Α	28
		110V	A	3.3
Power dissipation		1101	W	3.4
Mechanical features			V V	3.4
				NAC
Terminals screw				M5
Tightening torque for t	terminals max		Nm	2
Conductor size				
	AWG - Rigid cable			
		min	AWG	14
		Max	AWG	6
	AWG - Flexible cable			
		min	AWG	14
		Max	AWG	8
	Conductor size (IEC) - Flexible cable			
		min	mm²	2.5
		Max	mm²	10
	Conductor size (IEC) - Rigid cable	IVICA		
	Conductor Size (ILO) - Migid Cable	min	mm²	2.5
Marshautter LUZ		Max	mm²	16
Mechanical life			cycles	5x10 ⁶
UL technical data				
Motor power for direct				
	for three-phase motor			
		120V	HP	7.5
		240V	HP	15
		480V	HP	25
		600V	HP	25
	for single-phase motor			
		120V	HP	3
		240V	HP	10
Ambient conditions		Z T U V		
Temperature				
remperature	Operation temperature			
	Operating temperature			
			0.0	0.5
		min max	°C	-25 +55






Resistance & Protection
Frontal IP degree
Terminals IP degree

ROTARY CAM SWITCH 7GN SERIES, STAR-DELTA MOTOR STARTER SWITCH 63A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 65X65MM


Storage temperature				
	min	°C	-40	
	max	°C	+70	
on				
			IP40	
			IP00	

Dimensions

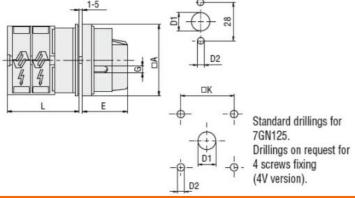

Series	Dimensions						L			
Series	□A	D1	D2	Е	G	□K	1	2	3	12
7GN12	65	12	5	34.2	5	36	36.1	45.8	55.5	142.8
7GN20	65	12	5	34.2	5	36	36.1	45.8	55.5	142.8
7GN25	65	12	5	34.2	5	36	40.5	54.1	67.7	190.1
7GN32	65	14	5	38	6	48	46.5	61.6	76.7	212.6
7GN40	65	14	5	38	6	48	46.5	61.6	76.7	212.6
7GN63	65	14	5	38	6	48	50.3	68.4	86.5	249.4
7GN125	90	16	6	49	7	68	67.3	96.4	125.5	394.9

Wiring diagrams

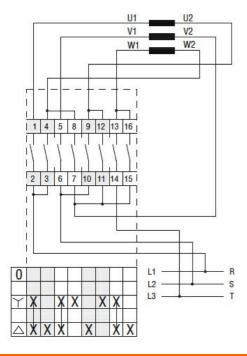

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

UL60947-4-1

Certificates

cCSAus

EAC

UL

ETIM classification



7GN6312U65

ROTARY CAM SWITCH 7GN SERIES, STAR-DELTA MOTOR STARTER SWITCH 63A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 65X65MM

ETIM 8.0

EC001029 -Selector switch, complete