

**ENERGY AND AUTOMATION** 

ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER SWITCH 16A, FOR **electric** REAR MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0, DOOR COUPLING AND PROTECTION COVERS, FRONT PLATE 48X48MM

Product designation				Rotary cam switches
Product type designation	n			GX16
General characteristics				
Switching diagram				12 - Star-delta motor starter switch
N° of elements		4		4
Mounting form				O88 - Rear mounting with red/yellow handle padlockable in 0, door coupling and protection covers
Contact characteristics	.116			
Rated insulation voltage		IEC/EN UL/CSA	V V	690 600
Rated impulse withstand			kV	6
Conventional free air the	ermal current Ith	IEC/EN UL/CSA	A A	16 12
Rated operational voltage			V	440
Rated operational impu	lse voltage		kV	4
Maximum fuse size for s	short-circuit protection In (gG)			
		10kA 15kA 25kA	A A A	16 16 16
Rated short time curren	t ICW	1s	Α	250
Conductivity				10/5 mA/V
Operational current le II				
	AC1/AC21A		Α	16
	AC15			
		110V	A	10
		220/230V	A	8
		380/400V 660/690V	A A	4 1.5
Rated operational power	er in AC	000/0901		1.0
. tatou oporational powe	Three-phase AC-3			
	r	220/230V	kW	3.5
		380/440V	kW	4.5
		500/690V	kW	5.5
	Single-phase AC-3			
		110V	kW	0.55
		220/230V	kW	1.5
	Three phase AC22A	380/440V	kW	2.2
	Three-phase AC23A	220/230V	kW	3.7
		380/440V	kW	6.5
		500/690V	kW	7.5
	Single-phase AC23A			



**ENERGY AND AUTOMATION** 

ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER SWITCH 16A, FOR **electric** REAR MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0, DOOR COUPLING AND PROTECTION COVERS, FRONT PLATE 48X48MM

		110V	kW	0.75
		220/230V	kW	1.8
		380/440V	kW	3
Rated operational curr	ent in DC			
,	DC21A			
		48V	Α	16
		60V	Α	16
		110V	Α	4
		220V	A	0.6
		440V	A	0.25
	DC22 A (nolog in parios)	440 V		0.23
	DC23A (poles in series)	241/	۸	40 (4)
		24V	A	16 (1)
		48V	Α	16 (2)
		60V	Α	16 (3)
		110V	Α	10 (3)
		220V	Α	7 (4)
	DC13			
		24V	Α	16
		48V	Α	14
		60V	Α	10
		110V	Α	1
		220V	Α	0.4
		440V	Α	0.15
Power dissipation		1101	W	0.6
Mechanical features			VV	0.0
Terminals screw				3M
	orminala may		Nm	0.5
Tightening torque for to	eminals max		INIII	0.5
Conductor size	ANNO BULL AND			
	AWG - Rigid cable			
		min	AWG	20
		Max	AWG	12
	AWG - Flexible cable			
		min	AWG	20
		Max	AWG	12
	Conductor size (IEC) - Flexible cable			
		min	mm²	0.5
		Max	mm²	2.5
	Conductor size (IEC) - Rigid cable			
		min	mm²	0.5
		Max	mm²	2.5
Mechanical life		IVIUA	cycles	1X10 <sup>6</sup>
UL technical data			Cycles	1/10
Motor power for direct	-on-line control			
iniotor power for direct				
	for three-phase motor	40017	LID	4.5
		120V	HP	1.5
		240V	HP	3
		480V	HP	5
		600V	HP	5
	for single-phase motor			
		120V	HP	0.75
		240V	HP	1
Ambient conditions				
Temperature				

Operating temperature






**ENERGY AND AUTOMATION** 

ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER SWITCH 16A, FOR **electric** REAR MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0, DOOR COUPLING AND PROTECTION COVERS, FRONT PLATE 48X48MM

	min max	°C °C	-25 +55	
Storage temperature				
	min	°C	-40	
	max	°C	+70	
Resistance & Protection				
Frontal IP degree			IP65	
Terminals IP degree			IP20	
Dimensions				
Wiring diagrams				

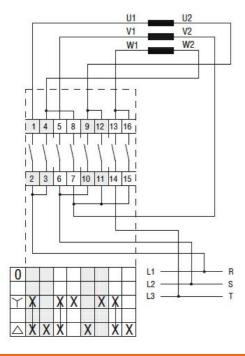

## Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

IEC/EN/BS 61058-1

UL60947-4-1

Certificates

cULus

EAC

ETIM classification

**ETIM 8.0** 

EC001029 -Selector switch, complete