

ENERGY AND AUTOMATION

ROTARY CAM SWITCH GX SERIES, ON-OFF SWITCH 4 POLES 20A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 48X48MM

| Duodinat docimantina | | | | Rotary cam |
|--|--------------------------------|--|----------------|--|
| Product designation | | | | switches |
| Product type designation General characteristics | | | | GX20 |
| Switching diagram | | | | 08 - ON/OFF |
| N° of elements | | | | switch 4 poles |
| Mounting form | | | | U25 - Front mounting with red/yellow handle padlockable in 0 and protection covers |
| Contact characteristics Rated insulation voltage U | i | | | |
| | | IEC/EN UL/CSA | V V | 690 600 |
| Rated impulse withstand v | <u> </u> | | kV | 6 |
| Conventional free air therr | nal current Ith | IEC/EN UL/CSA | A A | 20 15 |
| Rated operational voltage | | | V | 440 |
| Rated operational impulse | | | kV | 4 |
| Maximum fuse size for she | ort-circuit protection In (gG) | 10kA 15kA 25kA | A A A | 20 20 20 |
| Rated short time current lo | cw | 1s | Α | 250 |
| Conductivity | | | | 10/5 mA/V |
| Operational current le IEC | :/EN C1/AC21A | | _ | |
| | 045 | | A | 20 |
| ^ | C15 | 110V 220/230V 380/400V 660/690V | A A A | 10 8 6 1.5 |
| Rated operational power i | n AC | 000/030 V | | 1.0 |
| · | nree-phase AC-3 | 220/230V 380/440V | kW kW | 3.7 5.5 |
| - | ingle phase AC 2 | 500/690V | kW | 5.5 |
| _ | ingle-phase AC-3 | 110V 220/230V 380/440V | kW kW kW | 0.75 1.8 3 |
| TI | nree-phase AC23A | 220/230V 380/440V | kW kW | 4 7.5 |
| | | 500/690V | kW | 7.5 |
| S | ngle-phase AC23A | 110V | kW | 0.75 |



ROTARY CAM SWITCH GX SERIES, ON-OFF SWITCH 4 POLES 20A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT **ENERGY AND AUTOMATION** PLATE 48X48MM


| | | 220/230V | kW | 2.2 |
|-------------------------|---------------------------------------|--------------|--------|-------------------|
| | | 380/440V | kW | 3.5 |
| Rated operational curi | rent in DC | | | |
| | DC21A | | | |
| | | 48V | Α | 20 |
| | | 60V | Α | 20 |
| | | 110V | Α | 4 |
| | | 220V | Α | 0.6 |
| | | 440V | Α | 0.25 |
| | DC23A (poles in series) | | | |
| | , | 24V | Α | 20 (1) |
| | | 48V | Α | 20 (2) |
| | | 60V | Α | 20 (3) |
| | | 110V | Α | 10 (3) |
| | | 220V | Α | 8 (4) |
| | DC13 | 2201 | | 0 (1) |
| | | 24V | Α | 20 |
| | | 48V | A | 16 |
| | | 60V | A | 12 |
| | | 110V | | |
| | | 110V 220V | A | 1 0.4 |
| | | | A | |
| <u> </u> | | 440V | Α | 0.15 |
| Power dissipation | | | W | 0.6 |
| Mechanical features | | | | 140 |
| Terminals screw | | | | M3 |
| Tightening torque for t | terminals max | | Nm | 0.8 |
| Conductor size | | | | |
| | AWG - Rigid cable | | | |
| | | min | AWG | 20 |
| | | Max | AWG | 12 |
| | AWG - Flexible cable | | | |
| | | min | AWG | 20 |
| | | Max | AWG | 12 |
| | Conductor size (IEC) - Flexible cable | | | |
| | | min | mm² | 0.5 |
| | | Max | mm² | 2.5 |
| | Conductor size (IEC) - Rigid cable | | | |
| | , , , | min | mm² | 0.5 |
| | | Max | mm² | 2.5 |
| Mechanical life | | | cycles | 1X10 ⁶ |
| UL technical data | | | , | |
| Motor power for direct | t-on-line control | | | |
| , | for three-phase motor | | | |
| | .c. and phase motor | 120V | HP | 1.5 |
| | | 240V | HP | 3 |
| | | 480V | HP | 5 |
| | | 600V | HP | 5 |
| | for single-phase motor | 000 V | 1111 | <u> </u> |
| | ioi sirigie-priase motor | 1001 | UП | 0.75 |
| | | 120V | HP | 0.75 |
| Ambiant assocition | | 240V | HP | 1.5 |
| Ambient conditions | | | | |
| Temperature | | | | |
| | Operating temperature | min | °C | -25 |
| | | | | |



ENERGY AND AUTOMATION


ROTARY CAM SWITCH GX SERIES, ON-OFF SWITCH 4 POLES 20A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 48X48MM

| | max | °C | +55 | |
|-------------------------|-----|----|------|--|
| Storage temperature | | | | |
| Ŭ I | min | °C | -40 | |
| | max | °C | +70 | |
| Resistance & Protection | | | | |
| Frontal IP degree | | | IP65 | |
| Terminals IP degree | | | IP20 | |
| Dimensions | | | | |

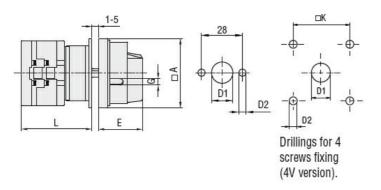

| Series | | Dimensions | | | | | L | | | |
|--------|----|------------|----|------|---|----|----|------|----|-------|
| | □A | D1 | D2 | Е | G | □K | 1 | 2 | 3 | 12 |
| GX16 | 48 | 12 | 5 | 34.2 | 5 | 36 | 43 | 51.5 | 60 | 136.5 |
| GX20 | 48 | 12 | 5 | 34.2 | 5 | 36 | 43 | 51.5 | 60 | 136.5 |
| GX32 | 65 | 14 | 5 | 38 | 6 | 48 | 51 | 63 | 75 | 183 |
| GX40 | 65 | 14 | 5 | 38 | 6 | 48 | 51 | 63 | 75 | 183 |

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

IEC/EN/BS 61058-1

UL60947-4-1

Certificates

cULus

EAC

ETIM classification





ENERGY AND AUTOMATION

ROTARY CAM SWITCH GX SERIES, ON-OFF SWITCH 4 POLES 20A, FOR FRONT MOUNTING

WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT

PLATE 48X48MM

ETIM 8.0

EC001029 -Selector switch, complete