

**ENERGY AND AUTOMATION** 

ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER SWITCH 20A, FOR **electric** REAR MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0, DOOR COUPLING AND PROTECTION COVERS, FRONT PLATE 48X48MM

| Product designation  Product type designation    |                                  |                                  | Rotary cam<br>switches<br>GX20 |  |
|--|----------------------------------|----------------------------------|--------------------------------|--|
| General characteristics                          |                                  |                                  |                                | SAZ0   |
| Switching diagram                                |                                  |                                  |                                | 12 - Star-delta<br>motor starter<br>switch   |
| N° of elements                                   |                                  |                                  |                                | 4  |
| Mounting form                                    |                                  |                                  |                                | O88 - Rear<br>mounting with<br>red/yellow handle<br>padlockable in 0,<br>door coupling<br>and protection<br>covers |
| Contact characteristics Rated insulation voltage |                                  |                                  |                                |  |
|  |                                  | IEC/EN<br>UL/CSA                 | V<br>V                         | 690<br>600   |
| Rated impulse withstar                           |                                  |                                  | kV                             | 6  |
| Conventional free air th                         | ermal current Ith                | IEC/EN<br>UL/CSA                 | A<br>A                         | 20<br>15   |
| Rated operational voltage                        |                                  | 02,007.                          | V                              | 440  |
| Rated operational impulse voltage                |                                  |                                  | kV                             | 4  |
|  | short-circuit protection In (gG) |                                  |                                |  |
|  |                                  | 10kA<br>15kA<br>25kA             | A<br>A<br>A                    | 20<br>20<br>20   |
| Rated short time currer                          | nt Icw                           | 1s                               | Α                              | 250  |
| Conductivity                                     |                                  |                                  |                                | 10/5 mA/V  |
| Operational current le                           |                                  |                                  |                                |  |
|  | AC1/AC21A                        |                                  | Α                              | 20   |
|  | AC15                             | 110V<br>220/230V<br>380/400V     | A<br>A<br>A                    | 10<br>8<br>6   |
| Rated operational pow                            | or in AC                         | 660/690V                         | Α                              | 1.5  |
| Nated operational pow                            | Three-phase AC-3                 |                                  |                                |  |
|  |                                  | 220/230V<br>380/440V<br>500/690V | kW<br>kW<br>kW                 | 3.7<br>5.5<br>5.5  |
|  | Single-phase AC-3                | 110V<br>220/230V                 | kW<br>kW                       | 0.75<br>1.8  |
|  |                                  | 380/440V                         | kW                             | 3  |
|  | Three-phase AC23A                | 220/230V<br>380/440V             | kW<br>kW                       | 4<br>7.5   |
|  |                                  | 500/690V                         | kW                             | 7.5  |
|  | Single-phase AC23A               |                                  |                                |  |



**ENERGY AND AUTOMATION** 

ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER SWITCH 20A, FOR **electric** REAR MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0, DOOR COUPLING AND PROTECTION COVERS, FRONT PLATE 48X48MM

|                          |                                       | 110V     | kW     | 0.75              |
|--------------------------|---------------------------------------|----------|--------|-------------------|
|                          |                                       | 220/230V | kW     | 2.2               |
|                          |                                       | 380/440V | kW     | 3.5               |
| Rated operational curr   | rent in DC                            |          |        |                   |
| ,                        | DC21A                                 |          |        |                   |
|                          |                                       | 48V      | Α      | 20                |
|                          |                                       | 60V      | Α      | 20                |
|                          |                                       | 110V     | A      | 4                 |
|                          |                                       | 220V     | A      | 0.6               |
|                          |                                       | 440V     | A      | 0.25              |
|                          | DC22 A (nolog in pariog)              | 440 V    |        | 0.23              |
|                          | DC23A (poles in series)               | 241/     | ۸      | 20 (4)            |
|                          |                                       | 24V      | A      | 20 (1)            |
|                          |                                       | 48V      | Α      | 20 (2)            |
|                          |                                       | 60V      | Α      | 20 (3)            |
|                          |                                       | 110V     | Α      | 10 (3)            |
|                          |                                       | 220V     | Α      | 8 (4)             |
|                          | DC13                                  |          |        |                   |
|                          |                                       | 24V      | Α      | 20                |
|                          |                                       | 48V      | Α      | 16                |
|                          |                                       | 60V      | Α      | 12                |
|                          |                                       | 110V     | Α      | 1                 |
|                          |                                       | 220V     | Α      | 0.4               |
|                          |                                       | 440V     | Α      | 0.15              |
| Power dissipation        |                                       | 1101     | W      | 0.6               |
| Mechanical features      |                                       |          | VV     | 0.0               |
| Terminals screw          |                                       |          |        | M3                |
| Tightening torque for to | orminals may                          |          | Nm     | 0.8               |
| Conductor size           | eminais max                           |          | INIII  | 0.0               |
| Conductor size           | ANAC Digid cable                      |          |        |                   |
|                          | AWG - Rigid cable                     |          | A14/O  | 00                |
|                          |                                       | min      | AWG    | 20                |
|                          |                                       | Max      | AWG    | 12                |
|                          | AWG - Flexible cable                  |          |        |                   |
|                          |                                       | min      | AWG    | 20                |
|                          |                                       | Max      | AWG    | 12                |
|                          | Conductor size (IEC) - Flexible cable |          |        |                   |
|                          |                                       | min      | mm²    | 0.5               |
|                          |                                       | Max      | mm²    | 2.5               |
|                          | Conductor size (IEC) - Rigid cable    |          |        |                   |
|                          | , ,                                   | min      | mm²    | 0.5               |
|                          |                                       | Max      | mm²    | 2.5               |
| Mechanical life          |                                       |          | cycles | 1X10 <sup>6</sup> |
| UL technical data        |                                       |          | 2,0.00 | <u>.</u>          |
| Motor power for direct   | -on-line control                      |          |        |                   |
| Motor power for direct   | for three-phase motor                 |          |        |                   |
|                          | ioi iiiiee-piiase iiiului             | 1001/    | ПD     | 1 5               |
|                          |                                       | 120V     | HP     | 1.5               |
|                          |                                       | 240V     | HP     | 3                 |
|                          |                                       | 480V     | HP     | 5                 |
|                          |                                       | 600V     | HP     | 5                 |
|                          | for single-phase motor                |          |        |                   |
|                          |                                       | 120V     | HP     | 0.75              |
|                          |                                       | 240V     | HP     | 1.5               |
| Ambient conditions       |                                       |          |        |                   |
| Temperature              |                                       |          |        |                   |
| •                        |                                       |          |        |                   |






**ENERGY AND AUTOMATION** 

ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER SWITCH 20A, FOR **electric** REAR MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0, DOOR COUPLING AND PROTECTION COVERS, FRONT PLATE 48X48MM

|                         | min | °C | -25  |  |
|-------------------------|-----|----|------|--|
|                         | max | °C | +55  |  |
| Storage temperature     |     |    |      |  |
|                         | min | °C | -40  |  |
|                         | max | °C | +70  |  |
| Resistance & Protection |     |    |      |  |
| Frontal IP degree       |     |    | IP65 |  |
| Terminals IP degree     |     |    | IP20 |  |
| Dimensions              |     |    |      |  |
| NAC - P                 |     |    |      |  |

## Wiring diagrams

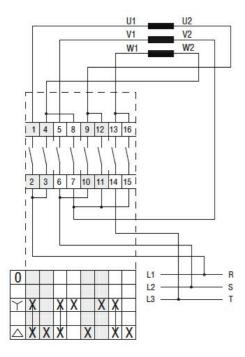

## Certifications and compliance

Compliance

CSA C22.2 n° 14 IEC/EN/BS 60947-1 IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1 IEC/EN/BS 61058-1

UL60947-4-1

Certificates

cULus EAC

ETIM classification

**ETIM 8.0** 

EC001029 -Selector switch, complete