



ENCLOSED ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER, 20A IN PLASTIC ENCLOSURE 90X90MM WITH RED/YELLOW HANDLE

Product designation			Enclosed rotary cam switch
Product type designation			GX20
General characteristics			
Switching diagram			12 - Star-delta motor starter switch
N° of elements			4
Mounting form			P25 - Plastic enclosure with red/yellow handle
Contact characteristics			
Rated insulation voltage Ui			
	IEC/EN	V	690
	UL/CSA	V	600
Rated impulse withstand voltage Uimp		kV	6
Conventional free air thermal current Ith			
	IEC/EN	Α	20
	UL/CSA	Α	15
Rated operational voltage		V	440
Rated operational impulse voltage		kV	4
Maximum fuse size for short-circuit protectio	n In (gG)		
	10kA	Α	20
	15kA	Α	20
	25kA	Α	20
Rated short time current Icw			
	1s	Α	250
Conductivity			10/5 mA/V
Operational current le IEC/EN			
AC1/AC21A			
		Α	20
AC15			
	110V	Α	10
	220/230V	Α	8
	380/400V	Α	6
	660/690V	Α	1.5
Rated operational power in AC			
Three-phase AC-3			
	220/230V	kW	3.7
	380/440V	kW	5.5
	500/690V	kW	5.5
Single-phase AC-3			
	110V	kW	0.75
	220/230V	kW	1.8
	380/440V	kW	3
Three-phase AC23A			
	220/230V	kW	4
	380/440V	kW	7.5
	500/690V	kW	7.5
Single-phase AC23			
	110V	kW	0.75
	220/230V	kW	2.2
	380/440V	kW	3.5

ENCLOSED ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER, 20A IN PLASTIC ENCLOSURE 90X90MM WITH RED/YELLOW HANDLE

Datad an arational a	verset is DC			
Rated operational co	DC21A			
	DCZTA	48V	Α	20
		60V		
			A	20
		110V	A	4
		220V	A	0.6
		440V	Α	0.25
	DC23A (poles in series)		_	4.1
		24V	Α	20 (1)
		48V	Α	20 (2)
		60V	Α	20 (3)
		110V	Α	10 (3)
		220V	Α	8 (4)
	DC13			
		24V	Α	20
		48V	Α	16
		60V	Α	12
		110V	Α	1
		220V	Α	0.4
		440V	Α	0.15
Power dissipation			W	0.6
Mechanical features			••	0.0
Terminals screw				M3
Tightening torque fo	or terminals max		Nm	0.8
Conductor size			. 4111	<u> </u>
Conductor SIZE	AWG - Rigid cable			
	AVVO - Migia cable	min	AWG	20
		min Max		20 12
	AVAIC Florible	IVIAX	AWG	14
	AWG - Flexible cable		A 1 A / C	00
		min	AWG	20
		Max	AWG	12
	Conductor size (IEC) - Flexible cable			
		min	mm²	0.5
		Max	mm²	2.5
	Conductor size (IEC) - Rigid cable			
		min	mm²	0.5
		Max	mm²	2.5
Mechanical life			cycles	1X10 ⁶
JL technical data				
Motor power for dire	ect-on-line control			
	for three-phase motor			
	·	120V	HP	1.5
		240V	HP	3
		480V	HP	5
		600V	HP	5
	for single-phase motor		• • • •	
	Tot single phase motor	120V	HP	0.75
		240V	HP	1.5
Ambient conditions		24UV	I IF	1.0
Temperature	Operating temperature			
	Operating temperature	!	°C	0.E
		min	°C	-25
		max	°C	+55
	Storage temperature			
	Storage temperature			




ENCLOSED ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER, 20A IN PLASTIC ENCLOSURE 90X90MM WITH RED/YELLOW HANDLE

min °C -40 max °C +70


Resistance & Protection	
Frontal IP degree	IP65
Terminals IP degree	IP20

Dimensions

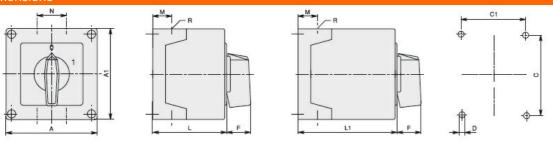

GX16	90x90	1-2	3-5	90	90	79	79	4.5	25	19	30	71.3	98.3	4xPG16	IP65
GX20		1 - 2	3-5		- 00	,,,	,,	1.0	-	-	- 00	71.0	00.0	TAI GIO	11 00
GX16	110x110	1 - 3	4-7			100	30		10	- 30	- 30	- 30	- 30		
GX20		1-3	4-7	110	110	98.4	83	4.5	32	21	39.5	85.5	119.5	4xPG21	IP65
GX32		1 - 2	3-4	110	110	90.4	63	4.5	32	21	39.5	65.5	119.5	4XPGZ1	1200
GX40	li .	1 - 2	3-4	1											

Wiring diagrams

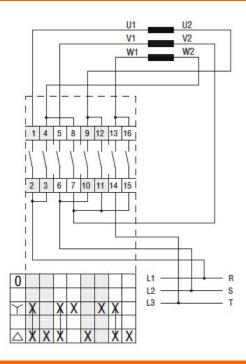

Certifications and compliance

Compliance

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

IEC/EN/BS 61058-1

Certificates

EAC

ETIM classification

ETIM 8.0

EC001029 -Selector switch, complete