



ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER SWITCH 20A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 48X48MM

Product designation				Rotary cam	
_				switches	
Product type designation General characteristics				GX20	
General Characteristics				12 - Star-delta	
Switching diagram				motor starter switch	
N° of elements				4	
				U25 - Front	
				mounting with	
Mounting form				red/yellow handle padlockable in 0	
				and protection	
				covers	
Contact characteristics					
Rated insulation voltage	e Ui				
		IEC/EN	V	690	
		UL/CSA	V	600	
Rated impulse withstan	·		kV	6	
Conventional free air th	ermal current Ith	IEO/EN	^	00	
		IEC/EN UL/CSA	A A	20 15	
Rated operational volta	700	UL/C3A		440	
Rated operational impu			kV	4	
	short-circuit protection In (gG)		IX V		
Waxiii 1000 0120 101	onen en ean protection in (ge)	10kA	Α	20	
		15kA	Α	20	
		25kA	Α	20	
Rated short time currer	nt Icw				
		1s	Α	250	
Conductivity				10/5 mA/V	
Operational current le I					
	AC1/AC21A				
	1015		Α	20	
	AC15	110\/	۸	10	
		110V 220/230V	A A	10 8	
		380/400V	A	6	
		660/690V	A	1.5	
Rated operational power	er in AC				
	Three-phase AC-3				
		220/230V	kW	3.7	
		380/440V	kW	5.5	
		500/690V	kW	5.5	
	Single-phase AC-3				
		110V	kW	0.75	
		220/230V	kW	1.8	
	Three-phase AC23A	380/440V	kW	3	
	Tillee-pilase AO23A	220/230V	kW	4	
		380/440V	kW	7.5	
		500/690V	kW	7.5	
	Single-phase AC23A				
		110V	kW	0.75	




ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER SWITCH 20A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 48X48MM

		220/230V	kW	2.2
		380/440V	kW	3.5
Rated operational curr				
	DC21A			
		48V	Α	20
		60V	Α	20
		110V	Α	4
		220V	Α	0.6
		440V	Α	0.25
	DC23A (poles in series)			
		24V	Α	20 (1)
		48V	Α	20 (2)
		60V	Α	20 (3)
		110V	Α	10 (3)
		220V	Α	8 (4)
	DC13			· · ·
		24V	Α	20
		48V	Α	16
		60V	Α	12
		110V	A	1
		220V	A	0.4
		440V	A	0.4
Dawer discinction		440 V		
Power dissipation			W	0.6
Mechanical features Terminals screw				M3
	amain ala many		Nm	
Tightening torque for to	erminais max		INITI	0.8
Conductor size	AMO BULLAND			
	AWG - Rigid cable		414/0	22
		min	AWG	20
		Max	AWG	12
	AWG - Flexible cable			
		min	AWG	20
		Max	AWG	12
	Conductor size (IEC) - Flexible cable			
		min	mm²	0.5
		Max	mm²	2.5
	Conductor size (IEC) - Rigid cable			
		min	mm²	0.5
		Max	mm²	2.5
Mechanical life			cycles	1X10 ⁶
UL technical data				
Motor power for direct	-on-line control			
	for three-phase motor			
		120V	HP	1.5
		240V	HP	3
		480V	HP	5
		600V	HP	5
	for single-phase motor	000 V	1 11	
	ioi siligie-pilase iliotoi	120V	ШD	0.75
			HP	
Amphiantenantiti		240V	HP	1.5
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25




ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER SWITCH 20A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 48X48MM

	max	°C	+55	
Storage temperature				
	min	°C	-40	
	max	°C	+70	
Resistance & Protection				
Frontal IP degree			IP65	
Terminals IP degree			IP20	
Dimensions				

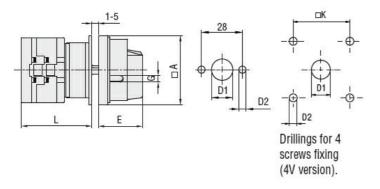

Series	Dimensions					L				
	$\Box A$	D1	D2	Е	G	□K	1	2	3	12
GX16	48	12	5	34.2	5	36	43	51.5	60	136.5
GX20	48	12	5	34.2	5	36	43	51.5	60	136.5
GX32	65	14	5	38	6	48	51	63	75	183
GX40	65	14	5	38	6	48	51	63	75	183

Wiring diagrams

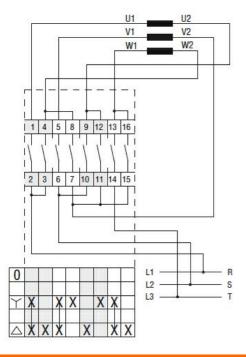

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3



GX2012U25

ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER SWITCH 20A, FOR FRONT MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0 AND PROTECTION COVERS, FRONT PLATE 48X48MM

EC/EN/BS 60947-5-1	-
EC/EN/BS 61058-1	
JL60947-4-1	
:ULus	
EAC	

ETIM classification

ETIM 8.0

Certificates

EC001029 -Selector switch, complete