



# ENCLOSED ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER, 32A IN PLASTIC ENCLOSURE 110X110MM WITH RED/YELLOW HANDLE

Product designation				Enclosed rotary
Product type designation	nn			cam switch GX32
General characteristics	/II			O/32
Switching diagram				12 - Star-delta motor starter switch
N° of elements				4
Mounting form				P25 - Plastic enclosure with red/yellow handle
Contact characteristics				
Rated insulation voltage	e Ui			
		IEC/EN	V	690
		UL/CSA	V	600
Rated impulse withstan	d voltage Uimp		kV	6
Conventional free air the	ermal current Ith			<u> </u>
		IEC/EN	Α	32
		UL/CSA	Α	32
Rated operational volta	ge		V	440
Rated operational impu	lse voltage		kV	4
Maximum fuse size for	short-circuit protection In (gG)			
		10kA	Α	35
		15kA	Α	35
		25kA	Α	35
Rated short time curren	t Icw			
		1s	Α	1000
Conductivity				10/5 mA/V
Operational current le II	EC/EN			
	AC1/AC21A			
			Α	32
	AC15			
		110V	Α	25
		220/230V	Α	20
		380/400V	Α	10
		660/690V	Α	2
Rated operational power	er in AC			
	Three-phase AC-3			
		220/230V	kW	7.5
		380/440V	kW	11
		500/690V	kW	11
	Single-phase AC-3			
		110V	kW	1.8
		220/230V	kW	3.5
		380/440V	kW	5.5
	Three-phase AC23A			
		220/230V	kW	8
		380/440V	kW	15
		500/690V	kW	15
	Single-phase AC23A			
		110V	kW	2.2
		220/230V	kW	3.5
		380/440V	kW	6

# ENCLOSED ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER, 32A IN PLASTIC ENCLOSURE 110X110MM WITH RED/YELLOW HANDLE

Rated operational cu				
	DC21A			
		48V	Α	32
		60V	Α	32
		110V	Α	5
		220V	Α	0.8
		440V	Α	0.25
	DC23A (poles in series)			
		24V	Α	32 (1)
		48V	Α	32 (2)
		60V	Α	32 (3)
		110V	Α	15 (3)
		220V	Α	12 (4)
	DC13			( )
	20.0	24V	Α	32
		48V	A	25
		60V	A	14
		110V	A	3
		220V	A	0.5
		440V		
Dowor dissimatian		4407	Α	0.15
Power dissipation			W	1.6
Mechanical features				N//
Terminals screw	Anna Santa and		NI	M4
Tightening torque fo	r terminais max		Nm	1.2
Conductor size	AWA 51 1 1			
	AWG - Rigid cable			
		min	AWG	16
		Max	AWG	8
	AWG - Flexible cable			
		min	AWG	16
		Max	AWG	10
	Conductor size (IEC) - Flexible cable			
		min	mm²	1.5
		Max	mm²	6
	Conductor size (IEC) - Rigid cable			
	, , ,	min	mm²	1.5
		Max	mm²	10
Mechanical life			cycles	1X10 <sup>6</sup>
UL technical data				
Motor power for dire	ect-on-line control			
•	for three-phase motor			
	and production	120V	HP	3
		240\/	HP	7.5
		240V 480V	HP HP	7.5 15
		480V	HP	15
	for single phase motor			
	for single-phase motor	480V 600V	HP HP	15 15
	for single-phase motor	480V 600V 120V	HP HP HP	15 15 1.5
	for single-phase motor	480V 600V	HP HP	15 15
	for single-phase motor	480V 600V 120V	HP HP HP	15 15 1.5
		480V 600V 120V	HP HP HP	15 15 1.5
	for single-phase motor  Operating temperature	480V 600V 120V 240V	HP HP HP HP	15 15 1.5 3
Ambient conditions Temperature		480V 600V 120V	HP HP HP	15 15 1.5 3
		480V 600V 120V 240V	HP HP HP HP	15 15 1.5 3

°C

min

-40

IP65




### ENCLOSED ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER, 32A IN

PLASTIC ENCLOSURE 110X110MM WITH RED/YELLOW HANDLE

	max	°C	+70
sistance & Protection			


Frontal IP degree Terminals IP degree IP20

#### **Dimensions**

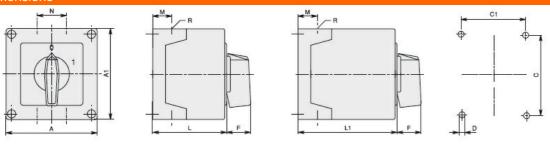

GX16 GX20	90x90	1-2	3-5 3-5	90	90	79	79	4.5	25	19	30	71.3	98.3	4xPG16	IP65
GX16	110x110	1 - 3	4-7												
GX20		1 - 3	4-7	110	110	00.4	00	4.5	20	01	20.5	05.5	110.5	4vD001	IDGE
GX32		1 - 2	3-4	110	110	98.4	83	4.5	32	21	39.5	85.5	119.5	4xPG21	IP65
GX40	l l	1 - 2	3-4												

#### Wiring diagrams

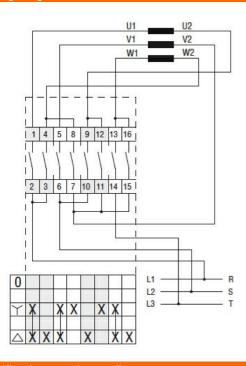

### Certifications and compliance

Compliance

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

IEC/EN/BS 61058-1

Certificates

EAC

ETIM classification

**ETIM 8.0** 

EC001029 -Selector switch, complete