

ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER SWITCH 40A, FOR REAR MOUNTING WITH BLACK HANDLE, FRONT PLATE 65X65MM

Product designation				Rotary cam switches
Product type designation	GX40			
General characteristics				
Switching diagram				12 - Star-delta motor starter switch
N° of elements				4
Mounting form				O - Rear mounting with black handle
Contact characteristics				
Rated insulation voltage Ui				
		IEC/EN	V	690
		UL/CSA	V	600
Rated impulse withstand vo	·		kV	6
Conventional free air therm	al current Ith			
		IEC/EN	Α	40
		UL/CSA	Α	40
Rated operational voltage			V	440
Rated operational impulse	voltage		kV	4
Maximum fuse size for sho	ort-circuit protection In (gG)			
		10kA	Α	40
		15kA	Α	35
		25kA	Α	35
Rated short time current Ic	W			
		1s	Α	1000
Conductivity				10/5 mA/V
Operational current le IEC/	'EN			
AC	C1/AC21A			
			Α	40
AC	C15			
		110V	Α	25
		220/230V	Α	22
		380/400V	Α	12
		660/690V	Α	2
Rated operational power in				
Th	ree-phase AC-3			
		220/230V	kW	7.5
		380/440V	kW	15
<u>-</u>		500/690V	kW	15
Siı	ngle-phase AC-3			
		110V	kW	2.2
		220/230V	kW	4.4
		380/440V	kW	7
Th	ree-phase AC23A			
		220/230V	kW	9
		380/440V	kW	18.5
		500/690V	kW	15
Sii	ngle-phase AC23A			_
		110V	kW	3
		220/230V	kW	5.2
		380/440V	kW	7.5

ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER SWITCH 40A, FOR REAR MOUNTING WITH BLACK HANDLE, FRONT PLATE 65X65MM

Data La continuada				
Rated operational c	urrent in DC DC21A			
	DCZTA	48V	Α	40
		60V	A	40
		110V	A	6
		220V	A	0.8
		440V	A	0.6
	DC23A (poles in series)	440 V	Α	0.25
	DC23A (poles in series)	241/	۸	40 (4)
		24V	A	40 (1)
		48V	A	40 (1)
		60V	A	40 (3)
		110V 220V	A	40 (3)
	DC42	2200	Α	12 (4)
	DC13	241/	۸	40
		24V	A	40
		48V	A	32
		60V	A	16
		110V	A	3
		220V	A	0.5
Santan alterite et		440V	Α	0.15
Power dissipation			W	1.6
Mechanical features				N/4
erminals screw	w to we in all was v		NI	M4
ightening torque fo	or terminais max		Nm	1.2
Conductor size	AWA 2011 II			
	AWG - Rigid cable			
		min	AWG	16
		Max	AWG	8
	AWG - Flexible cable	_		
		min	AWG	16
	-	Max	AWG	10
	Conductor size (IEC) - Flexible cable		•	
		min	mm²	1.5
	-	Max	mm²	6
	Conductor size (IEC) - Rigid cable		_	
		min	mm²	1.5
		Max	mm²	10
Mechanical life			cycles	1X10 ⁶
JL technical data				
Notor power for dire				
	for three-phase motor			
		120V	HP	5
		240V	HP	10
		480V	HP	15
		600V	HP	15
	for single-phase motor			
		120V	HP	2
		240V	HP	5
Ambient conditions				
emperature				
	Operating temperature			
			0.0	-25
		min	°C	-23
		min max	°C	-25 +55




ROTARY CAM SWITCH GX SERIES, STAR-DELTA MOTOR STARTER SWITCH 40A, FOR REAR MOUNTING WITH BLACK HANDLE, FRONT PLATE 65X65MM

min	°C	-40
max	°C.	+70

Resistance & Protection	
Frontal IP degree	IP65
Terminals IP degree	IP20

Dimensions

Wiring diagrams

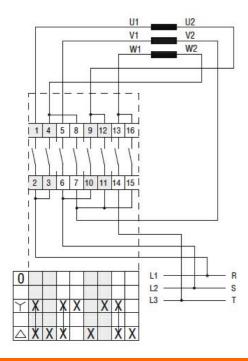

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-3
IEC/EN/BS 60947-5-1
IEC/EN/BS 61058-1
UL60947-4-1

Certificates

cULus EAC

ETIM classification

ETIM 8.0

EC001029 -Selector switch, complete