

ROTARY CAM SWITCH GX SERIES, DAHLANDER MOTOR 2-SPEED REVERSING SWITCH, 40A, FOR FRONT MOUNTING WITH BLACK HANDLE, FRONT PLATE 65X65MM

Product designation				Rotary cam
Product type designation	on			switches GX40
General characteristics				GA40
Switching diagram				20 - Dahlander motor 2-speed reversing switch
N° of elements				6
Mounting form				U - Front mounting with black handle
Contact characteristics				
Rated insulation voltag				
_		IEC/EN	V	690
		UL/CSA	V	600
Rated impulse withstar			kV	6
Conventional free air th	ermal current Ith			
		IEC/EN	Α	40
		UL/CSA	Α	40
Rated operational volta	age		V	440
Rated operational impu	ulse voltage		kV	4
Maximum fuse size for	short-circuit protection In (gG)			
		10kA	Α	40
		15kA	Α	35
		25kA	Α	35
Rated short time curre	nt Icw	10	۸	1000
Conductivity		1s	A	10/5 mA/V
Operational current le	IEC/EN			10/3 1117/ V
Operational current le	AC1/AC21A			
	NO I/NOZIN		Α	40
	AC15		- , ,	
		110V	Α	25
		220/230V	Α	22
		380/400V	Α	12
		660/690V	Α	2
Rated operational pow	er in AC			_
	Three-phase AC-3			
		220/230V	kW	7.5
		380/440V	kW	15
		500/690V	kW	15
	Single-phase AC-3			
		110V	kW	2.2
		220/230V	kW	4.4
	Three phase AC22A	380/440V	kW	7
	Three-phase AC23A	220/230V	kW	9
		220/230V 380/440V	kW	9 18.5
		500/690V	kW	15
	Single-phase AC23A	300/030 (17.4.4	10
	Oligio pridoc AozoA	110V	kW	3
		220/230V	kW	5.2
		380/440V	kW	7.5

ROTARY CAM SWITCH GX SERIES, DAHLANDER MOTOR 2-SPEED REVERSING SWITCH, 40A, FOR FRONT MOUNTING WITH BLACK HANDLE, FRONT PLATE 65X65MM

Rated operational c				
	DC21A	48V	۸	40
		60V	A A	40
		110V	A	6
		220V	A	0.8
		440V	A	0.25
	DC23A (poles in series)	440 V	^	0.25
	DC25A (poles in series)	24V	Α	40 (1)
		48V	A	40 (1)
		60V	A	40 (3)
		110V	A	40 (3)
		220V	A	12 (4)
	DC13	220 V		12 (4)
	DC13	24V	Α	40
		48V	A	32
		60V		16
		110V	A A	3
		220V	A	o.5
		220V 440V	A	0.5 0.15
)ower dissination		440 V	W	
Power dissipation Mechanical features			VV	1.6
erminals screw				M4
	r tarminala may		Nim	1.2
ightening torque fo	n terminais max		Nm	1.2
Conductor size	ANNO Divid calds			
	AWG - Rigid cable		A1A/O	4.0
		min	AWG	16
	ANNO 51 11 11	Max	AWG	8
	AWG - Flexible cable		414/0	4.0
		min	AWG	16
		Max	AWG	10
	Conductor size (IEC) - Flexible cable		2	4.5
		min	mm²	1.5
	0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Max	mm²	6
	Conductor size (IEC) - Rigid cable		2	4 =
		min	mm²	1.5
		Max	mm²	10
lechanical life			cycles	1X10 ⁶
JL technical data				
Notor power for dire				
	for three-phase motor			_
		120V	HP	5
		240V	HP	10
		480V	HP	15
	 	600V	HP	15
	for single-phase motor			_
		120V	HP	2
		240V	HP	5
mbient conditions				
emperature				
	Operating temperature			
		min	°C	-25
			0.0	
		max	°C	+55





ROTARY CAM SWITCH GX SERIES, DAHLANDER MOTOR 2-SPEED REVERSING SWITCH, 40A, FOR FRONT MOUNTING WITH BLACK HANDLE, FRONT PLATE 65X65MM

min °C -40 max °C +70

Resistance & Protection	
Frontal IP degree	IP65
Terminals IP degree	IP20

Dimensions






Drillings for 4 screws fixing (4V version).

Corios			L Number of elements																
Series	□A	C	ØD1	ØD2	Е	□K	□N	1	2	3	4	5	6	7	8	9	10	11	12
GX16	48	39.5	12	5	26.5	36	6	43	51.5	60	68.5	77	85.5	94	102.5	111	119.5	128	136.5
GX20	48	39.5	12	5	26.5	36	6	43	51.5	60	68.5	77	85.5	94	102.5	111	119.5	128	136.5
GX32	65	53	14	5	34.5	48	7	51	63	75	85	99	111	123	135	147	159	171	183
GX40	65	53	14	5	34.5	48	7	51	63	75	85	99	111	123	135	147	159	171	183

Wiring diagrams

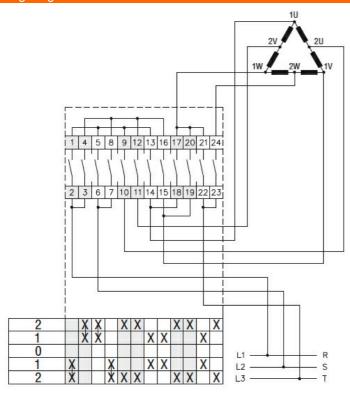

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

IEC/EN/BS 61058-1

UL60947-4-1



Selector switch, complete



ENERGY AND AUTOMATION

ETIM 8.0

ROTARY CAM SWITCH GX SERIES, DAHLANDER MOTOR 2-SPEED REVERSING SWITCH, 40A, FOR FRONT MOUNTING WITH BLACK HANDLE, FRONT PLATE 65X65MM

Certificates		
	cULus	
	EAC	
ETIM classificati	on	
		EC001029 -