


# START-UP PRIORITY CHANGE RELAY, MODULAR VERSION, 2 OUTPUTS. AC SUPPLY VOLTAGE, 110...127VAC

Product designation  Product type designation  Function			Start-up priority change relay. Possible starting of stand-by motor. Modular version LVMP10 Start-up priority change relay. Possible starting of stand-by motor
Auxiliary supply			Cinale voltage
Supply voltage Type  Rated auxiliary supply voltage Us  AC	min Max	VAC VAC	Single voltage  110 127
Operating voltage range	IVICA	7710	0.851.1 Us
Rated frequency		Hz	50/60
Power consumption Max		VA	4.8
Power dissipation Max		W	3
Relay outputs			
Number of relays		Nr.	2
Relay state			Normally de- energised, energises at tripping
Contact arrangement			2 x 1NO-SPST contact
Rated operational voltage AC (IEC)		VAC	250
Maximum switching voltage		VAC	400
IEC Conventional free air thermal current Ith		Α	8
UL/CSA and IEC/EN 60947-5-1 designation			B300
Electrical life (with rated load)		cycles	105
Mechanical life		cycles	30x10 <sup>6</sup>
Indications			
Indication			1 green LED for power on 1 red LED for relay state
Functions			
3 detecting electrodes (MIN, MAX and COM)			No
5 detecting electrodes (MIN1, MAX1, MIN2, MAX2 and COM			No
Sensitivity adjustment 2.550k Ω			No
Sensitivity adjustment 2.5100k Ω			No
Sensitivity adjustment 2.5200k Ω			No

# START-UP PRIORITY CHANGE RELAY, MODULAR VERSION, 2 OUTPUTS. AC SUPPLY VOLTAGE, 110...127VAC


A P ( )   -   -   -   -   -   -   -   -   -			NI.
Adjustable sensitivity full-scale value 25-50-100-200 k Ω			No
Separate sensitivity adjustment for MAX probe (foam detection)			No
Emptying function			No
Filling function			No
Emptying function with MIN and/or MAX alarm			No
Filling function with MIN and/or MAX alarm			No
Emptying function with pump priority change			No
Filling function with pump priority change			No
Tank filling, well drawing and alarm			No
Filling-emptying adjustment selector			No
Programming selector for 5 different			No
Motor start-up priority change			No
Connections			0
Terminals type			Screw
Tightening torque for terminals			
	max	Nm	0.8
	max	Ibin	7
Conductor cross section			
AWG/Kcmil	_		
	min	AWG	24
150	Max	AWG	12
IEC	_	2	
	min	mm²	0.2
leger lettere	Max	mm²	4
Insulations  Detail insulation valte as I ii		V	445
Rated insulation voltage Ui		kV	415
Rated impulse withstand voltage Uimp			2.5
Operating frequency withstand voltage  Ambient conditions		kV	2.5
Temperature			
Operating temperature	min	°C	-20
	max	°C	+60
Storage temperature	Шах		+00
Storage temperature	min	°C	-30
	max	°C	+80
Housing	Пах	U	+00
		<del></del>	Modular DIN rail
Execution			mounting
N° of modules			3
			Self-extinguishing
Material			polyamide
			35mm DIN rail
			(IEC/EN 60715)
Mounting			or by screws
			using extractable
			clips
IEC degree of protection			IP40 on front /
<del>0</del> <del>1</del> - <del>1</del>			IP20 on terminals
			53.5 x 104.7 x
Dimensions (W x H x D)		mm	
Dimensions (W x H x D)			64.9
Dimensions (W x H x D)  Weight  Dimensions		mm g	



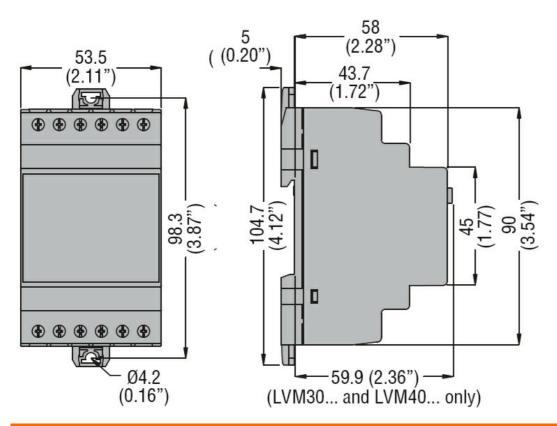

#### Wiring diagrams


### 2-wire connection



C1 = Primary

C2 = Secondary / Standby

#### 3-wire connection



C1 = Start Primary

C2 = Start Standby C3 = Stop Primary

C4 = Stop Standby

### Certifications and compliance

#### Compliance



## LVMP10A127

START-UP PRIORITY CHANGE RELAY, MODULAR VERSION, 2 OUTPUTS. AC SUPPLY VOLTAGE, 110...127VAC

	CSA C22.2 n° 14
	IEC/EN 60255-5
	IEC/EN 61000-6-2
	IEC/EN 61000-6-3
	UL508
Certificates	
	cULus
	EAC

ETIM classification

ETIM 8.0

EC001447 - (Fill) level monitoring relay