




DIRECT-ON-LINE-STARTER, ENCLOSED WITH THERMAL OVERLOAD RELAY, WITH RESET PUSHBUTTON, WITH BG09/BG12 CONTACTOR, 1A MAX (0.18...0.25KW AT 400V), IP65. CONTACTOR COIL VOLTAGE 400VAC 50/60HZ



Product designation  Product type designation			Direct-on-line starter M0R009121
Electrical features			
Relay adj range		Α	0.6-1
IEC technical characteristics (≤440V)			
	le	Α	1
	kW	kW	0.180.25
Components			
Starter enclosure standard supplied			M0RA
Contactor standard supplied			BG0910A
Thermal relay standard supplied			RF91
Mechanical features			
Weight		g	720
Ambient conditions			
Operating temperature			
	min	°C	-25
	max	°C	+60
Storage temperature			
	min	°C	-40
	max	°C	+70
Resistance & Protection			
Frontal IP degree			IP65
Dimensions			

DIRECT-ON-LINE-STARTER, ENCLOSED WITH THERMAL OVERLOAD RELAY, WITH RESET PUSHBUTTON, WITH BG09/BG12 CONTACTOR, 1A MAX (0.18...0.25KW AT 400V), IP65. CONTACTOR COIL VOLTAGE 400VAC 50/60HZ

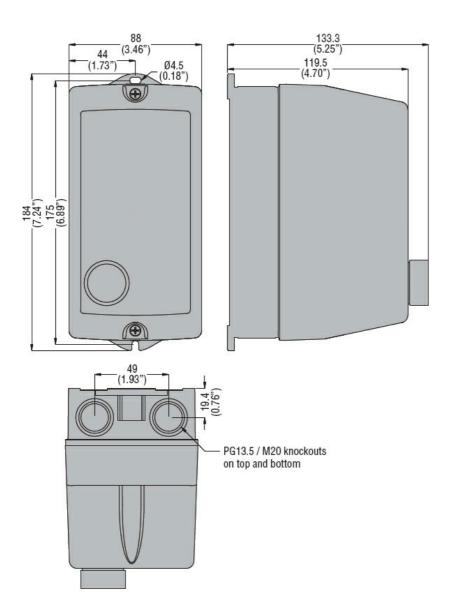


Wiring diagrams



DIRECT-ON-LINE-STARTER, ENCLOSED WITH THERMAL OVERLOAD RELAY, WITH RESET PUSHBUTTON, WITH BG09/BG12 CONTACTOR, 1A MAX (0.18...0.25KW AT 400V), IP65.

CONTACTOR COIL VOLTAGE 400VAC 50/60HZ

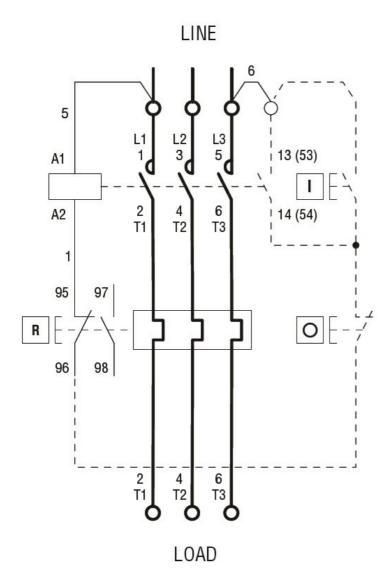

R = Reset; I = Start; O = Stop

Certifica	tions and	l compl	iance
-----------	-----------	---------	-------

Compliance

IEC/EN 60947-1

IEC/EN 60947-4-1

UL508 CSA C22.2 n° 14

Certificates

**CSAus** 

cULus

EAC

ETIM classification

**ETIM 8.0** 

EC001037 -Motor starter/Motor starter combination