



DIRECT-ON-LINE-STARTER, ENCLOSED WITH THERMAL OVERLOAD RELAY, WITH RESET PUSHBUTTON, WITH BG09/BG12 CONTACTOR, 1.5A MAX (0.37KW AT 400V), IP65. CONTACTOR COIL VOLTAGE 400VAC 50/60HZ




Product designation			Direct-on-line starter
Product type designation			M0R009121V5
Electrical features			
Relay adj range		Α	0.9-1.5
IEC technical characteristics (≤440V)			_
	le	Α	1.5
	kW	kW	0.37
Components			
Starter enclosure standard supplied			M0RA
Contactor standard supplied			BG0910A
Thermal relay standard supplied			RF91V5
Mechanical features			
Weight		g	720
Ambient conditions			
Operating temperature			
	min	°C	-25
	max	°C	+60
Storage temperature			
	min	°C	-40
	max	°C	+70
Resistance & Protection			
Frontal IP degree			IP65
Dimensions			



DIRECT-ON-LINE-STARTER, ENCLOSED WITH THERMAL OVERLOAD RELAY, WITH RESET PUSHBUTTON, WITH BG09/BG12 CONTACTOR, 1.5A MAX (0.37KW AT 400V), IP65.


CONTACTOR COIL VOLTAGE 400VAC 50/60HZ

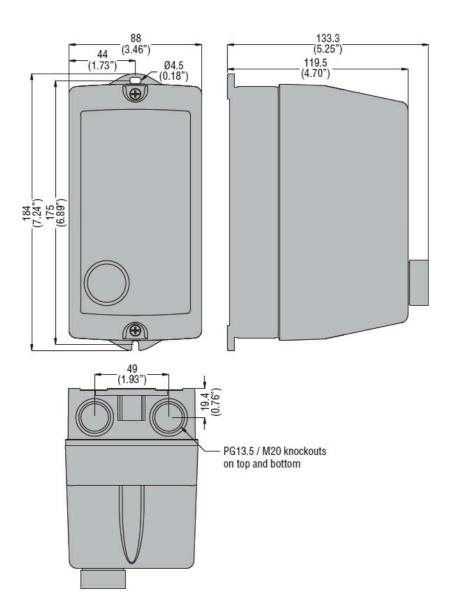

Wiring diagrams



DIRECT-ON-LINE-STARTER, ENCLOSED WITH THERMAL OVERLOAD RELAY, WITH RESET PUSHBUTTON, WITH BG09/BG12 CONTACTOR, 1.5A MAX (0.37KW AT 400V), IP65. CONTACTOR COIL VOLTAGE 400VAC 50/60HZ

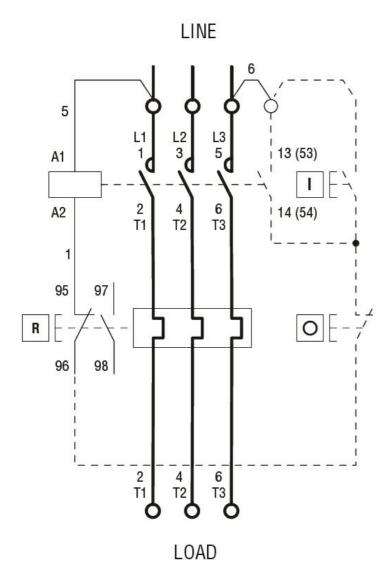

R = Reset; I = Start; O = Stop

Certifications and compliance Compliance

IEC/EN 60947-1

IEC/EN 60947-4-1

UL508 CSA C22.2 n° 14

Certificates

CSAus

cULus

EAC

ETIM classification

ETIM 8.0

EC001037 -Motor starter/Motor starter combination