


MINIMAL TRACK 24V Profile 2m

A384-02-00- | N | WT |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A | III

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N | WT |


Cable Length = 35mm.



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded

A384-00-03- | N | WT |


Cable Length = 35mm.



MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N | WT |

Cable Length = 100mm.




MINIMAL TRACK 24V End Cap

A384-00-05- | N | WT |






MINIMAL TRACK 24V Connection Box

A384-00-06- | N | WT |





					P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07- NT WT	40W	24V	280 x 30 x 24mm		
		A384-00-08- NT WT	100W	24V	280 x 30 x 24mm		
220 240	V~	Included ON/OFF 24Vdc Power Supply.					
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm		
		0433-10-22	100W	24V	295 x 43 x 30mm		
220 240	V~						
MINIMAL TRACK 24V Remote Constant Voltage Dimmer		0433-01-32	DALI / Push	24V	181 x 42 x 20mm		
		0433-01-35	CASAMBI	24V	72,6 x 30 x 18mm		
		0434-01-64	WIFI	24V	105 x 44 x 23mm		
24 V							



DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		<5	<10	<20	<30
POWER [W]	CABLE SECTION [mm²]	TRACK LENGTH (m)			
		30	30	30	30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

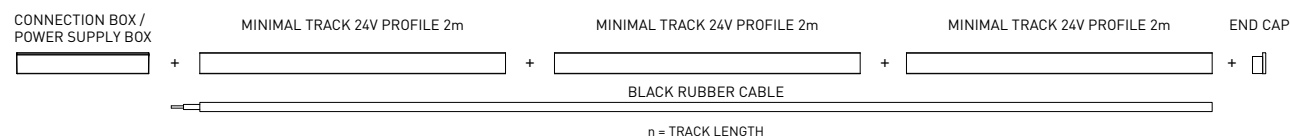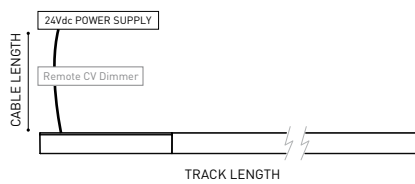

COLOUR | N ■ | NT ■ | WT □ |

DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

INSTALLATION GUIDE
<https://youtu.be/KnedJbKp7oo>

