

# AGICITY ALTO

## AGICITY ALTO 22 KVA

### Contact

Sales contact  
contact.agicity@nexans.com

Nexans Ref.: 304024E

1 plug socket charging station, 22 kW, wall or pedestal mounted.  
AGICITY ALTO ev-charger is ideal for equipping a parking space in collective housing, businesses and establishments open to the public that do not require remote management.

## DESCRIPTION

AGICITY ALTO is the most economical solution in the AGICITY range by Nexans.

Its polycarbonate design allows it to combine lightness and robustness. Its small footprint allows installation with reduced wall or floor space, indoors and outdoors.

### Configuration

- Power supply: from 1x **3.7kW** to 1x **22kW**
- Electrical protections: not integrated
- Plug socket: Lockable Type 2S
- Metering: none
- Identification: optional RFID reader (ISO 14443A, ISO 14443B, MiFare)

### Charge access

- Plug & charge
- Local user authentication through RFID
- Offline authorization by badges



## STANDARDS

**International** IEC 61851;  
IEC 62196

**National** NF C15-100

## CHARACTERISTICS

### Construction characteristics

Plug socket	Type 2S Lockable
RFID system	None
Charging mode	Mode 3
Colour	Light grey RAL 7035
Material	Polycarbonate
Number of charging points	1

### Dimensional characteristics

Approximate net weight	4.5 kg
------------------------	--------

### Electrical characteristics

Power	22 kVA
Current type	Three phase

### Mechanical characteristics

IK Rating	10
-----------	----

### Usage characteristics

IP Rating	IP55
-----------	------

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 7/8/24 www.nexans.fr Page 1 / 2

Nexans


### Usage characteristics

Operating temperature, range

-25 ... 55 °C

### ALTO DETAILS

Version murale

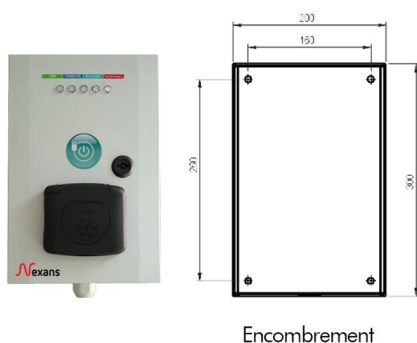

Version sur pied

