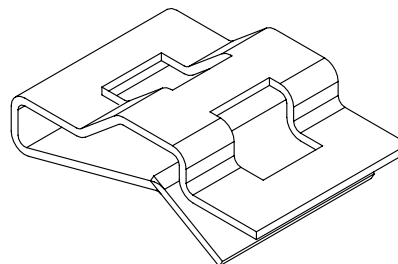
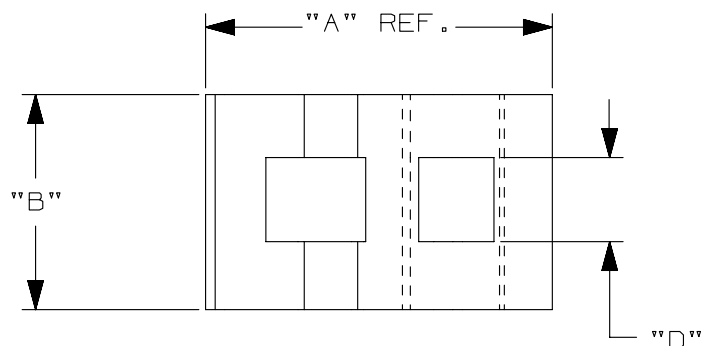


2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	USED WITH THESE CABLE TIES	PANEL THICKNESS	DIMENSIONS INCHES / (MM)					WEIGHT lbs/100 pcs (g)/100 pcs
			A (REF)	B	C (REF)	D	E	
MCMS12-PJ	M, I, S	0.03 - 0.125 (0.76 - 3.18)	0.880 (22.35)	0.560 (14.22)	0.318 (8.08)	0.220 (5.59)	0.025 (0.64)	0.59 (268)


NOTES:

- CABLE TIE CROSS-SECTION CODE
M - MINIATURE
I - INTERMEDIATE
S - STANDARD

- MATERIAL: AISI 1050 STEEL .025" $\pm$.002 THICK
HEAT TREAT TO RC 46-50 AFTER FORMING.

PLATING: MECHANICAL ZINC COATING PER JDM F22 4A

DIMENSIONS IN BRACKETS ARE METRIC (mm)

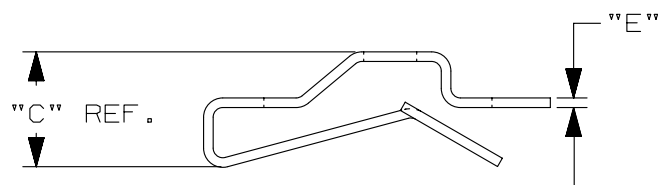

TITLE		MCMS12-PJ - METAL CLIP ON MOUNT	
ITEM REVISION NAME		CUSTOMER DRAWING	
10B0150U/01		PANDUIT	
DATASET FILE NAME		10B0150U_DC/01	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.x $\pm$.05 [1.27] .xxx $\pm$.015 [0.38]		SEE NOTES	
.xx $\pm$.02 [.50] ANGLES $\pm$ 5°		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		10B0150U	
DRAWN BY	DATE	CHK	SCALE
MBY	10/29/14	MPH	2/1
SHT 1 OF 1		SIZE	
A		A	

01	12/3/14	MBY	MPH	JADE	REVISED DIM 'C'	10B0150U/01
R	10/29/14	MBY	MPH	JADE	RELEASED	10B0150U/00
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

2

1