


**SPECIFICATION**

- STANDARD:
  - UNIT TYPE: MSPO
  - ORIENTATION: VERTICAL, OU FULL
  - OUTLET QTY & TYPE: (24)C13/C15, (24)C13/C15/C19/C21
  - INPUT VOLTAGE: 200-240/346-415VAC
  - INPUT CURRENT: 20A(16A DERATED)/16A
  - BREAKER QTY & TYPE: NA
  - INPUT PHASE: 3 PHASE WYE, L-N
  - RATED POWER: 11.5/11.0 KVA
  - INPUT PLUG: IEC 60309 3P+N+E 6H 20A/16A (IP44)
  - REGULATORY STANDARD: RoHS COMPLIANT
- ADDITIONAL:
  - CORD TYPE: 5W 12AWG SOOW & 2.5MM<sup>2</sup>H07RN-F
- ACCESSORIES:
  - PRODUCT SAFETY WARNING SHEET

**NOTES**

- PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]
- FOR FULL PRODUCT FUNCTIONLTY REFER TO THE USER MANUAL.



LEFT VIEW




REAR VIEW


TOOLLESS MOUNTING  
BUTTON LOCATIONS  
4 PL

24.0  
[.94]


18.5 DIA  
[.728]  
2 PL




RIGHT VIEW

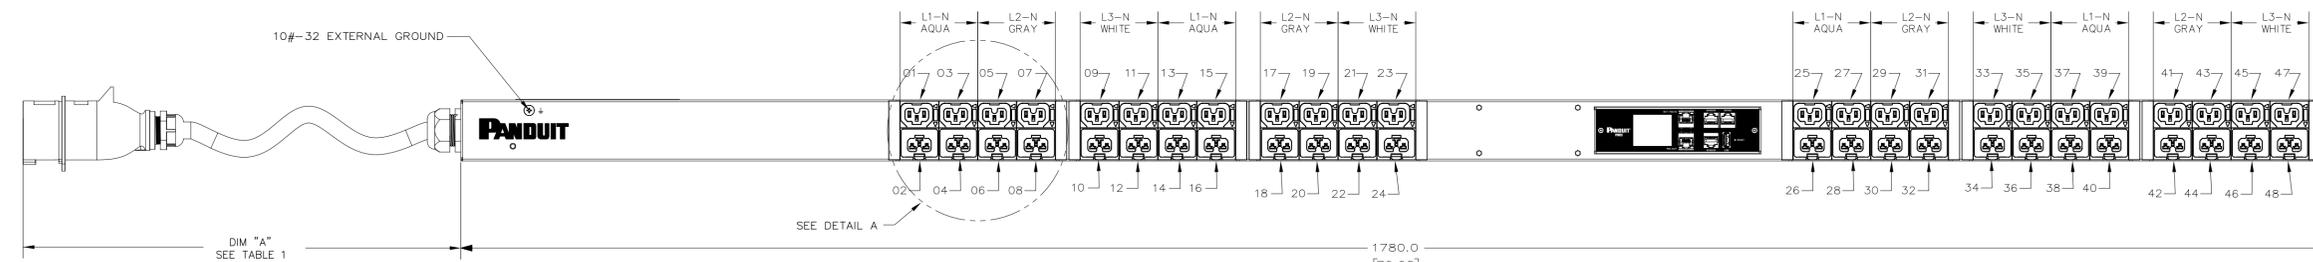

FRONT VIEW



BOTTOM VIEW

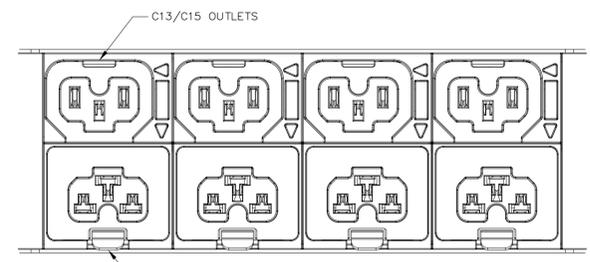


DETAIL A  
SCALE 1:1

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E48G33L	EL2P MSPO PDU, 20/16AMP, (24)C13/C15, (24)C13/C15/C19/C21, IEC 60309 3P+N+E 6h 20A/16A (IP44)	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	9.8

INPUT PLUG FRONT VIEW



COMPLIANCE LABEL VIEW

**PANDUIT**  
18900 Panduit Drive, 60487, USA  
www.panduit.com  
SKU #: E48G33L-BLSC  
Model #: E2Y016C0  
INPUT: 200-240/346-415VAC, WYE, 3Ø, 50/60Hz, 16A(EU), OR 200-240/346-415VAC, WYE, 3Ø, 50/60Hz, 16A(NA)  
OUTPUT: C13: 200-240VAC, 10A per outlet  
C19: 200-240VAC, 16A per outlet  
16A Total(EU) OR 16A Total(NA)

Power Distribution Unit

NOM NYCE

FC CE

62368-1

CAN ICES-003(A)/NMB-003(A)

SKU: E48G33L-BLSC  
SN: XXXXXXXXXXXX  
MAC: XXXXXXXXXXXX  
Made in China

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	SCALE	SHT	OF	SIZE
00A	02/06/2025	LLJ	GLM	MJD	RELEASE TO PRODUCTION	E48G33L	3:10	1	1	D

**E48G33L**  
CUSTOMER DRAWING

ITEM REVISION NAME: E48G33L/00  
DATASET FILE NAME: E48G33L-DC/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]

FINISH: ...  
MATERIAL: ...  
DRAUGHTING: ...  
THIRD ANGLE PROJECTION

**PANDUIT**

NOT APPLICABLE

DRAWING NUMBER: E48G33L-DC